



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp®_rate2006 = 492

PowerEdge R620 (Intel Xeon E5-2680, 2.70 GHz)

SPECfp_rate_base2006 = 478

CPU2006 license: 55


Test date: Jan-2013

Test sponsor: Dell Inc.

Hardware Availability: Dec-2012

Tested by: Dell Inc.

Software Availability: Jun-2012

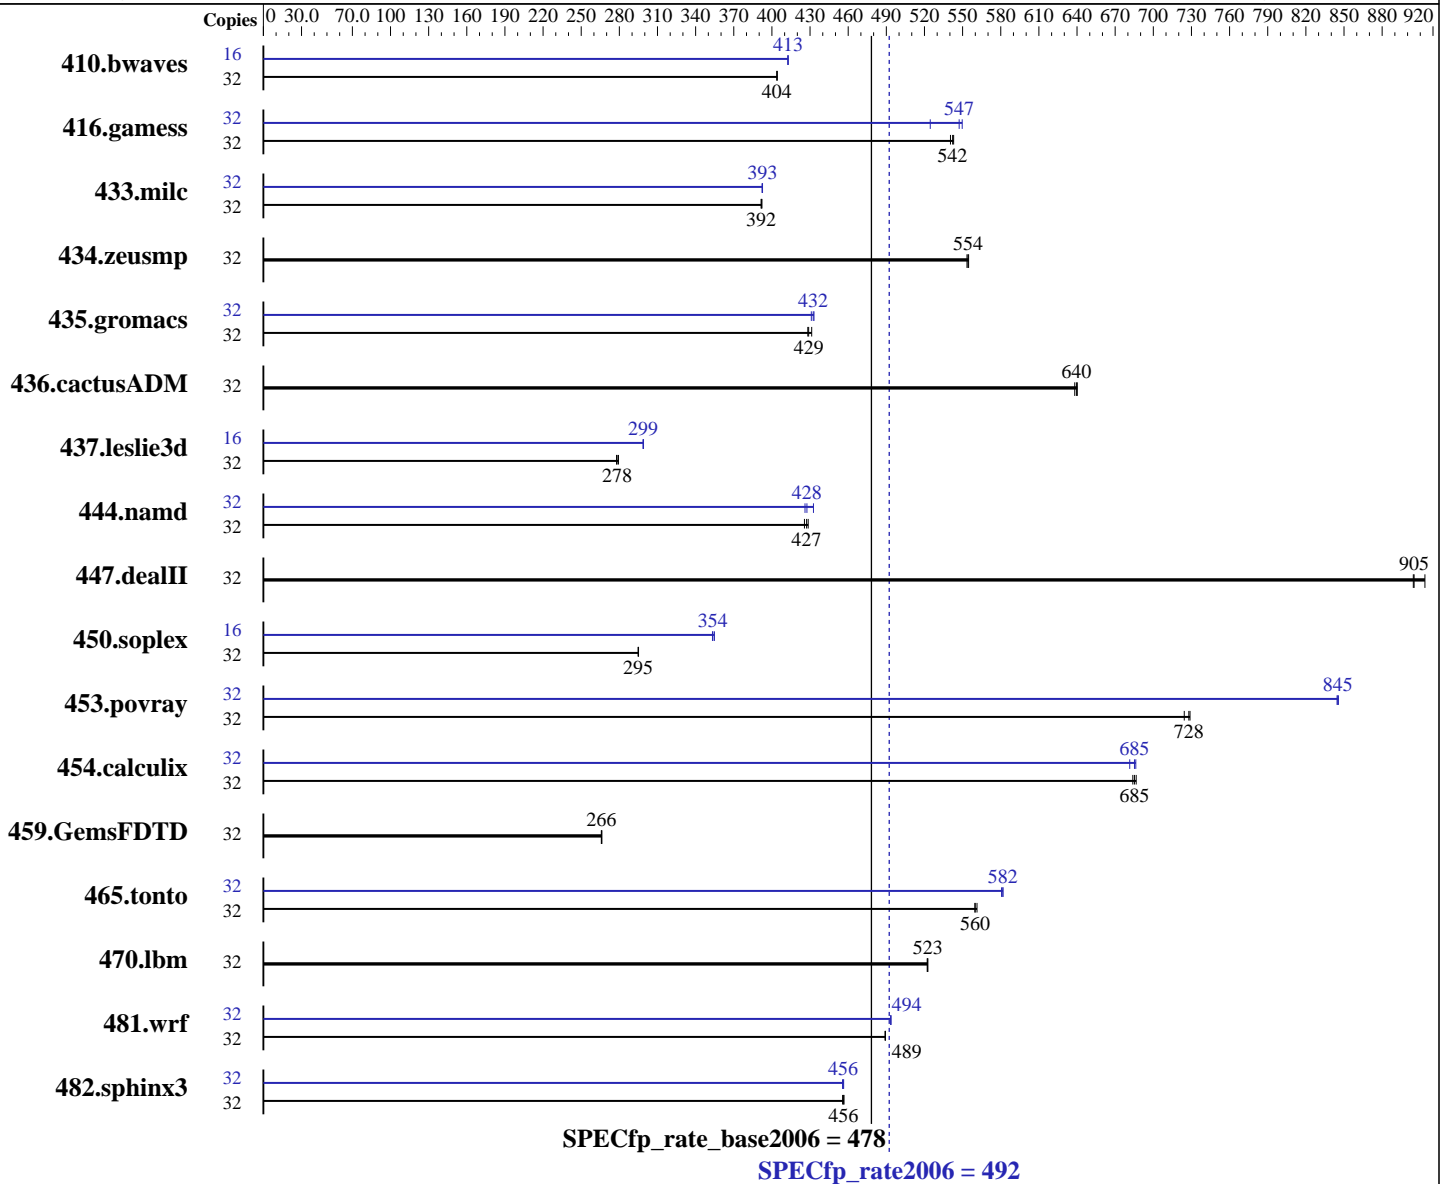

Hardware

CPU Name: Intel Xeon E5-2680
 CPU Characteristics: Intel Turbo Boost Technology up to 3.50 GHz
 CPU MHz: 2700
 FPU: Integrated
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.3 (Santiago)
 2.6.32-279.el6.x86_64
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;
 Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 492

PowerEdge R620 (Intel Xeon E5-2680, 2.70 GHz)

SPECfp_rate_base2006 = 478

CPU2006 license: 55

Test date: Jan-2013

Test sponsor: Dell Inc.

Hardware Availability: Dec-2012

Tested by: Dell Inc.

Software Availability: Jun-2012

L3 Cache: 20 MB I+D on chip per chip
 Other Cache: None
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)
 Disk Subsystem: 1 x 300 GB 15000 RPM SAS
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32	1076	404	<u>1077</u>	<u>404</u>	1077	404	16	527	413	<u>527</u>	<u>413</u>	527	413
416.gamess	32	1159	540	<u>1156</u>	<u>542</u>	1154	543	32	1194	525	1140	550	<u>1145</u>	<u>547</u>
433.milc	32	749	392	750	392	<u>750</u>	<u>392</u>	32	748	393	749	392	<u>748</u>	<u>393</u>
434.zeusmp	32	<u>525</u>	<u>554</u>	526	553	525	555	32	<u>525</u>	<u>554</u>	526	553	525	555
435.gromacs	32	<u>533</u>	<u>429</u>	530	431	534	428	32	<u>528</u>	<u>432</u>	528	433	530	431
436.cactusADM	32	597	640	<u>598</u>	<u>640</u>	599	638	32	597	640	<u>598</u>	<u>640</u>	599	638
437.leslie3d	32	1077	279	<u>1081</u>	<u>278</u>	1083	278	16	503	299	504	299	<u>503</u>	<u>299</u>
444.namd	32	599	429	603	426	<u>601</u>	<u>427</u>	32	<u>600</u>	<u>428</u>	602	426	593	433
447.dealII	32	405	905	<u>404</u>	<u>905</u>	401	914	32	405	905	<u>404</u>	<u>905</u>	401	914
450.soplex	32	904	295	<u>905</u>	<u>295</u>	905	295	16	<u>377</u>	<u>354</u>	376	355	378	353
453.povray	32	234	729	235	724	<u>234</u>	<u>728</u>	32	<u>201</u>	<u>845</u>	202	845	201	846
454.calculix	32	385	687	<u>385</u>	<u>685</u>	386	684	32	<u>385</u>	<u>685</u>	385	686	387	681
459.GemsFDTD	32	<u>1276</u>	<u>266</u>	1275	266	1277	266	32	<u>1276</u>	<u>266</u>	1275	266	1277	266
465.tonto	32	<u>562</u>	<u>560</u>	561	561	563	560	32	542	581	<u>541</u>	<u>582</u>	541	582
470.lbm	32	842	522	<u>841</u>	<u>523</u>	841	523	32	842	522	<u>841</u>	<u>523</u>	841	523
481.wrf	32	730	489	<u>731</u>	<u>489</u>	731	489	32	724	494	<u>724</u>	<u>494</u>	724	494
482.sphinx3	32	1366	457	<u>1367</u>	<u>456</u>	1369	456	32	1369	456	1366	456	<u>1368</u>	<u>456</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

System Profile set to Custom
CPU Power Management set to Maximum Performance
Memory Frequency set to Maximum Performance

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 492

PowerEdge R620 (Intel Xeon E5-2680, 2.70 GHz)

SPECfp_rate_base2006 = 478

CPU2006 license: 55

Test date: Jan-2013

Test sponsor: Dell Inc.

Hardware Availability: Dec-2012

Tested by: Dell Inc.

Software Availability: Jun-2012

Platform Notes (Continued)

```
Turbo Boost set to Enabled
C States/C1E set to Enabled
Sysinfo program /root/cpu2006-1.2/config/sysinfo.rev6800
$Rev: 6800 $ $Date:: 2011-10-11 #$ 6f2ebdff5032aaa42e583f96b07f99d3
running on localhost.localdomain Thu Jan 3 16:26:05 2013
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2680 0 @ 2.70GHz
 2 "physical id"s (chips)
 32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 8
  siblings  : 16
  physical 0: cores 0 1 2 3 4 5 6 7
  physical 1: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB
```

```
From /proc/meminfo
MemTotal:      132088816 kB
HugePages_Total:    0
Hugepagesize:    2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.3 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.3 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.3 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux localhost.localdomain 2.6.32-279.el6.x86_64 #1 SMP Wed Jun 13 18:24:36
EDT 2012 x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Jan 3 05:00 last=5

```
SPEC is set to: /root/cpu2006-1.2
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sdal        ext4      241G  36G  193G  16% /
```

Additional information from dmidecode:

```
Memory:
 2x 00AD04B300AD HMT31GR7BFR4C-PB 8 GB 1600 MHz 2 rank
 14x 00CE00B300CE M393B1K70DH0-CK0 8 GB 1600 MHz 2 rank
```

(End of data from sysinfo program)



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 492

PowerEdge R620 (Intel Xeon E5-2680, 2.70 GHz)

SPECfp_rate_base2006 = 478

CPU2006 license: 55

Test date: Jan-2013

Test sponsor: Dell Inc.

Hardware Availability: Dec-2012

Tested by: Dell Inc.

Software Availability: Jun-2012

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/root/cpu2006-1.2/libs/32:/root/cpu2006-1.2/libs/64"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
The Dell PowerEdge R620 and the Bull NovaScale R440 F3 models are electronically equivalent.
The results have been measured on a Dell PowerEdge R620 model.

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.lelie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 492

PowerEdge R620 (Intel Xeon E5-2680, 2.70 GHz)

SPECfp_rate_base2006 = 478

CPU2006 license: 55

Test date: Jan-2013

Test sponsor: Dell Inc.

Hardware Availability: Dec-2012

Tested by: Dell Inc.

Software Availability: Jun-2012

Base Portability Flags (Continued)

482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 5



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 492

PowerEdge R620 (Intel Xeon E5-2680, 2.70 GHz)

SPECfp_rate_base2006 = 478

CPU2006 license: 55

Test date: Jan-2013

Test sponsor: Dell Inc.

Hardware Availability: Dec-2012

Tested by: Dell Inc.

Software Availability: Jun-2012

Peak Portability Flags (Continued)

```

435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

```

Peak Optimization Flags

C benchmarks:

```

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
-opt-mem-layout-trans=3

```

```

470.lbm: basepeak = yes

```

```

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll2

```

C++ benchmarks:

```

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

```

```

447.dealII: basepeak = yes

```

```

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

```

```

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

```

Fortran benchmarks:

```

410.bwaves: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static

```

```

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep- -static

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 492

PowerEdge R620 (Intel Xeon E5-2680, 2.70 GHz)

SPECfp_rate_base2006 = 478

CPU2006 license: 55

Test date: Jan-2013

Test sponsor: Dell Inc.

Hardware Availability: Dec-2012

Tested by: Dell Inc.

Software Availability: Jun-2012

Peak Optimization Flags (Continued)

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
-inline-alloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch
-static -auto-ilp32 -opt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -static -auto-ilp32
-opt-mem-layout-trans=3

481.wrf: Same as 454.calculix

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revA.20120410.00.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revA.20120410.00.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 14:46:47 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 29 January 2013.