



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECfp®_rate2006 = 182

Servidor Itautec MX205 (Intel Xeon E5-2603)

SPECfp_rate_base2006 = 179

CPU2006 license: 9001


Test date: Jan-2013

Test sponsor: Itautec

Hardware Availability: Jun-2012

Tested by: Itautec

Software Availability: Jun-2012

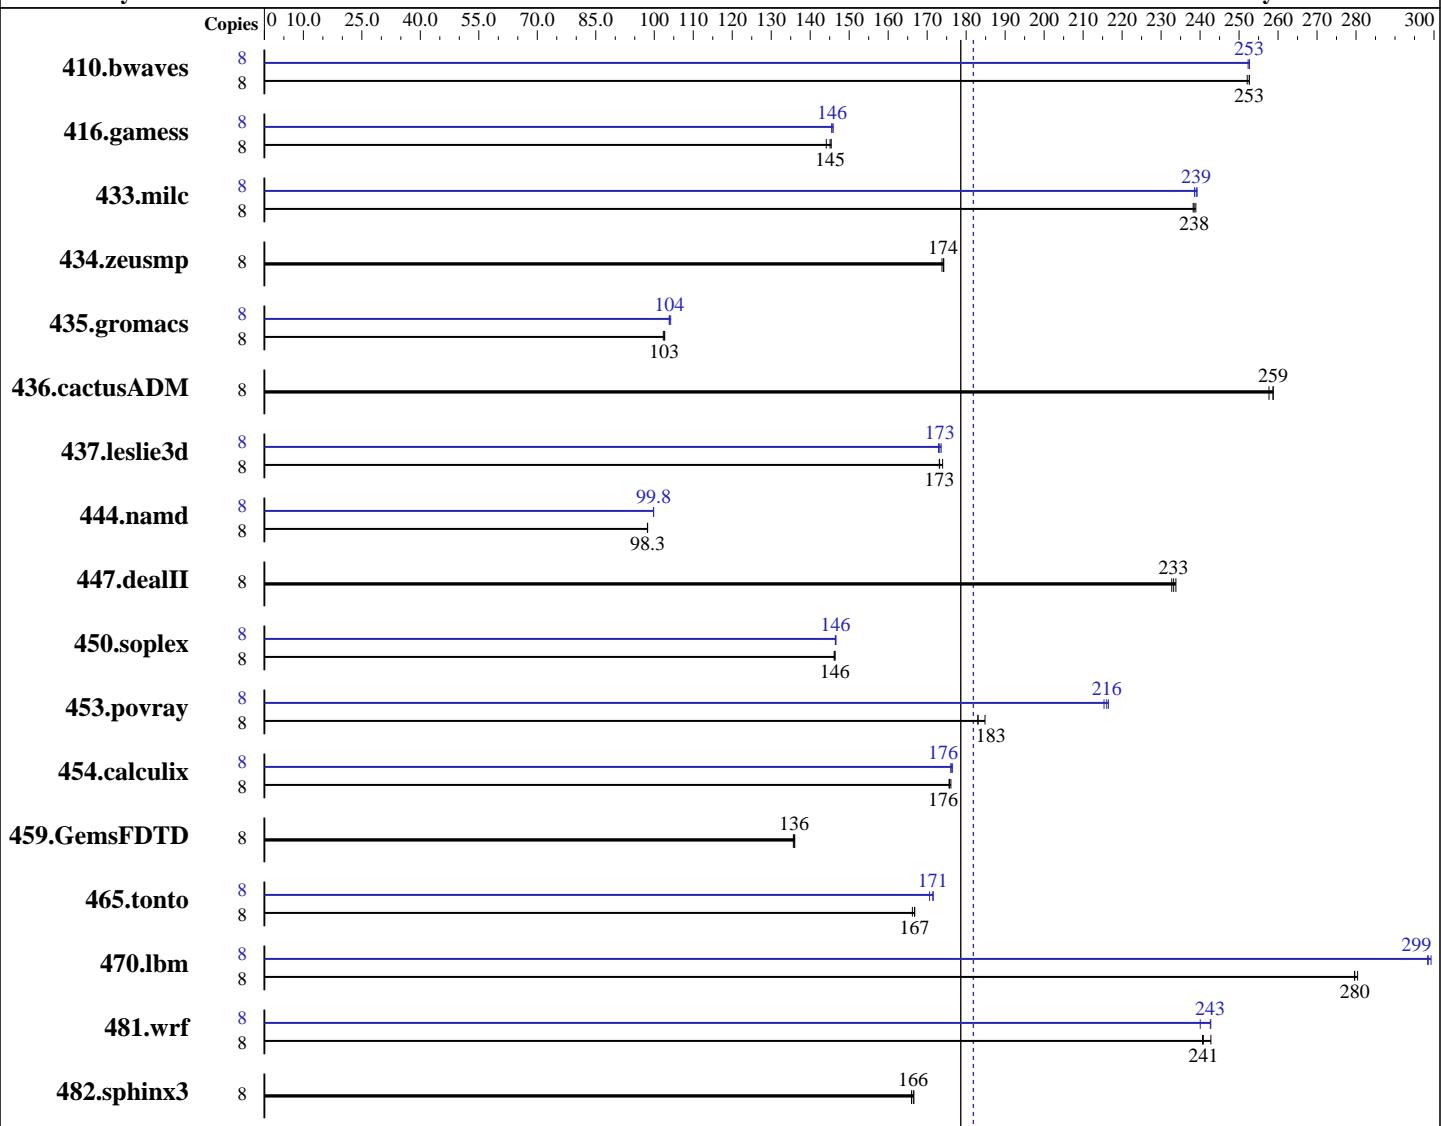

SPECfp_rate_base2006 = 179

SPECfp_rate2006 = 182

Hardware

CPU Name: Intel Xeon E5-2603
CPU Characteristics:
CPU MHz:
FPU: Integrated
CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
CPU(s) orderable: 1,2 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: Red Hat Enterprise Linux Server Release 6.3, 2.6.32-279.el6.x86_64
Compiler: C/C++/Fortran: Version 12.1.0 of Intel Compiler XE Build 20111011
Auto Parallel: No
File System: ext4
System State: Run level 3 (multi-user)
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECfp_rate2006 = 182

Servidor Itautec MX205 (Intel Xeon E5-2603)

SPECfp_rate_base2006 = 179

CPU2006 license: 9001

Test date: Jan-2013

Test sponsor: Itautec

Hardware Availability: Jun-2012

Tested by: Itautec

Software Availability: Jun-2012

L3 Cache:	10 MB I+D on chip per chip	Other Software:	None
Other Cache:	None		
Memory:	64 GB (16 x 4 GB 2Rx8 PC3-10600R-11, ECC, running at 1066 MHz and CL7)		
Disk Subsystem:	3 x 300 GB, SAS, 15000 RPM, RAID 0		
Other Hardware:	None		

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	430	253	430	253	431	252	8	430	253	431	252	430	253
416.gamess	8	1080	145	1087	144	1077	145	8	1074	146	1076	146	1077	146
433.milc	8	308	238	308	238	307	239	8	308	239	307	239	307	239
434.zeusmp	8	418	174	419	174	418	174	8	418	174	419	174	418	174
435.gromacs	8	556	103	558	102	557	103	8	548	104	550	104	550	104
436.cactusADM	8	370	259	371	258	369	259	8	370	259	371	258	369	259
437.leslie3d	8	434	173	434	173	432	174	8	433	174	435	173	434	173
444.namd	8	653	98.2	653	98.3	653	98.3	8	643	99.8	643	99.8	643	99.8
447.dealII	8	391	234	393	233	392	233	8	391	234	393	233	392	233
450.soplex	8	457	146	456	146	456	146	8	455	147	456	146	455	146
453.povray	8	230	185	233	183	233	183	8	198	215	197	216	197	216
454.calculix	8	375	176	376	176	376	176	8	375	176	374	176	375	176
459.GemsFDTD	8	625	136	624	136	626	136	8	625	136	624	136	626	136
465.tonto	8	472	167	472	167	474	166	8	459	172	459	171	461	171
470.lbm	8	393	280	392	280	393	280	8	367	299	368	299	368	298
481.wrf	8	368	243	371	241	371	241	8	368	243	368	243	372	240
482.sphinx3	8	939	166	936	167	937	166	8	939	166	936	167	937	166

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run.
Large pages were not enabled for this run

Platform Notes

```
Sysinfo program /home/rccaneca/cpu2006/Docs/sysinfo
$Rev: 6775 $ $Date::: 2011-08-16 #$
running on itautec.fam5 Fri Jan 25 03:23:39 2013
Continued on next page
```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

Servidor Itautec MX205 (Intel Xeon E5-2603)

SPECfp_rate2006 = 182

CPU2006 license: 9001
Test sponsor: Itautec
Tested by: Itautec

Test date: Jan-2013
Hardware Availability: Jun-2012
Software Availability: Jun-2012

Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2603 0 @ 1.80GHz
        2 "physical id"s (chips)
        8 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
    cpu cores : 4
    siblings : 4
    physical 0: cores 0 1 2 3
    physical 1: cores 0 1 2 3
cache size : 10240 KB
```

```
From /proc/meminfo
MemTotal:       65946096 kB
HugePages_Total:      0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.3 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.3 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.3 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux itautec.fam5 2.6.32-279.el6.x86_64 #1 SMP Wed Jun 13 18:24:36 EDT 2012
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jan 24 15:42
```

```
SPEC is set to: /home/rchaneca/cpu2006
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/vg_itautec-lv_home
                ext4   743G  2.1G  704G   1%  /home
```

(End of data from sysinfo program)

General Notes

This result was measured on the Servidor Itautec MX205.
The Servidor Itautec MX205, the Servidor Itautec MX225+ and the Servidor Itautec LX205
are electronically equivalent.



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaute

Servidor Itaute MX205 (Intel Xeon E5-2603)

SPECfp_rate2006 = 182

CPU2006 license: 9001
Test sponsor: Itaute
Tested by: Itaute

Test date: Jan-2013
Hardware Availability: Jun-2012
Software Availability: Jun-2012

Base Compiler Invocation

C benchmarks:
`icc -m64`

C++ benchmarks:
`icpc -m64`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`icc -m64 ifort -m64`

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
`-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3`

C++ benchmarks:
`-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3`

Fortran benchmarks:
`-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch`

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

Servidor Itautec MX205 (Intel Xeon E5-2603)

SPECfp_rate2006 = 182

CPU2006 license: 9001
Test sponsor: Itautec
Tested by: Itautec

Test date: Jan-2013
Hardware Availability: Jun-2012
Software Availability: Jun-2012

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

450.soplex: icpc -m32

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

Peak Optimization Flags

C benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaute

Servidor Itaute MX205 (Intel Xeon E5-2603)

SPECfp_rate2006 = 182

SPECfp_rate_base2006 = 179

CPU2006 license: 9001

Test sponsor: Itaute

Tested by: Itaute

Test date: Jan-2013

Hardware Availability: Jun-2012

Software Availability: Jun-2012

Peak Optimization Flags (Continued)

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
-opt-mem-layout-trans=3

470.lbm: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3
-ansi-alias -opt-prefetch -auto-ilp32
-opt-mem-layout-trans=3

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll14 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-
-static

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll14 -auto -inline-calloc
-opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch
-static -auto-ilp32 -opt-mem-layout-trans=3

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

Servidor Itautec MX205 (Intel Xeon E5-2603)

SPECfp_rate2006 = 182

SPECfp_rate_base2006 = 179

CPU2006 license: 9001

Test sponsor: Itautec

Tested by: Itautec

Test date: Jan-2013

Hardware Availability: Jun-2012

Software Availability: Jun-2012

Peak Optimization Flags (Continued)

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -static -auto-ilp32
-opt-mem-layout-trans=3

481.wrf: Same as 454.calculix

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/Itautec-Servidor_Itautec-Intel-Linux-Platform.html

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2006/flags/Itautec-Servidor_Itautec-Intel-Linux-Platform.xml

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 15:02:16 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 12 February 2013.