



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Acer Incorporated

SPECfp<sup>®</sup>2006 = **90.9**

## Altos R380 F2 (Intel Xeon E5-2690)

SPECfp\_base2006 = **86.4**

CPU2006 license: 97


Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Mar-2013

Hardware Availability: Apr-2013

Software Availability: Jun-2012

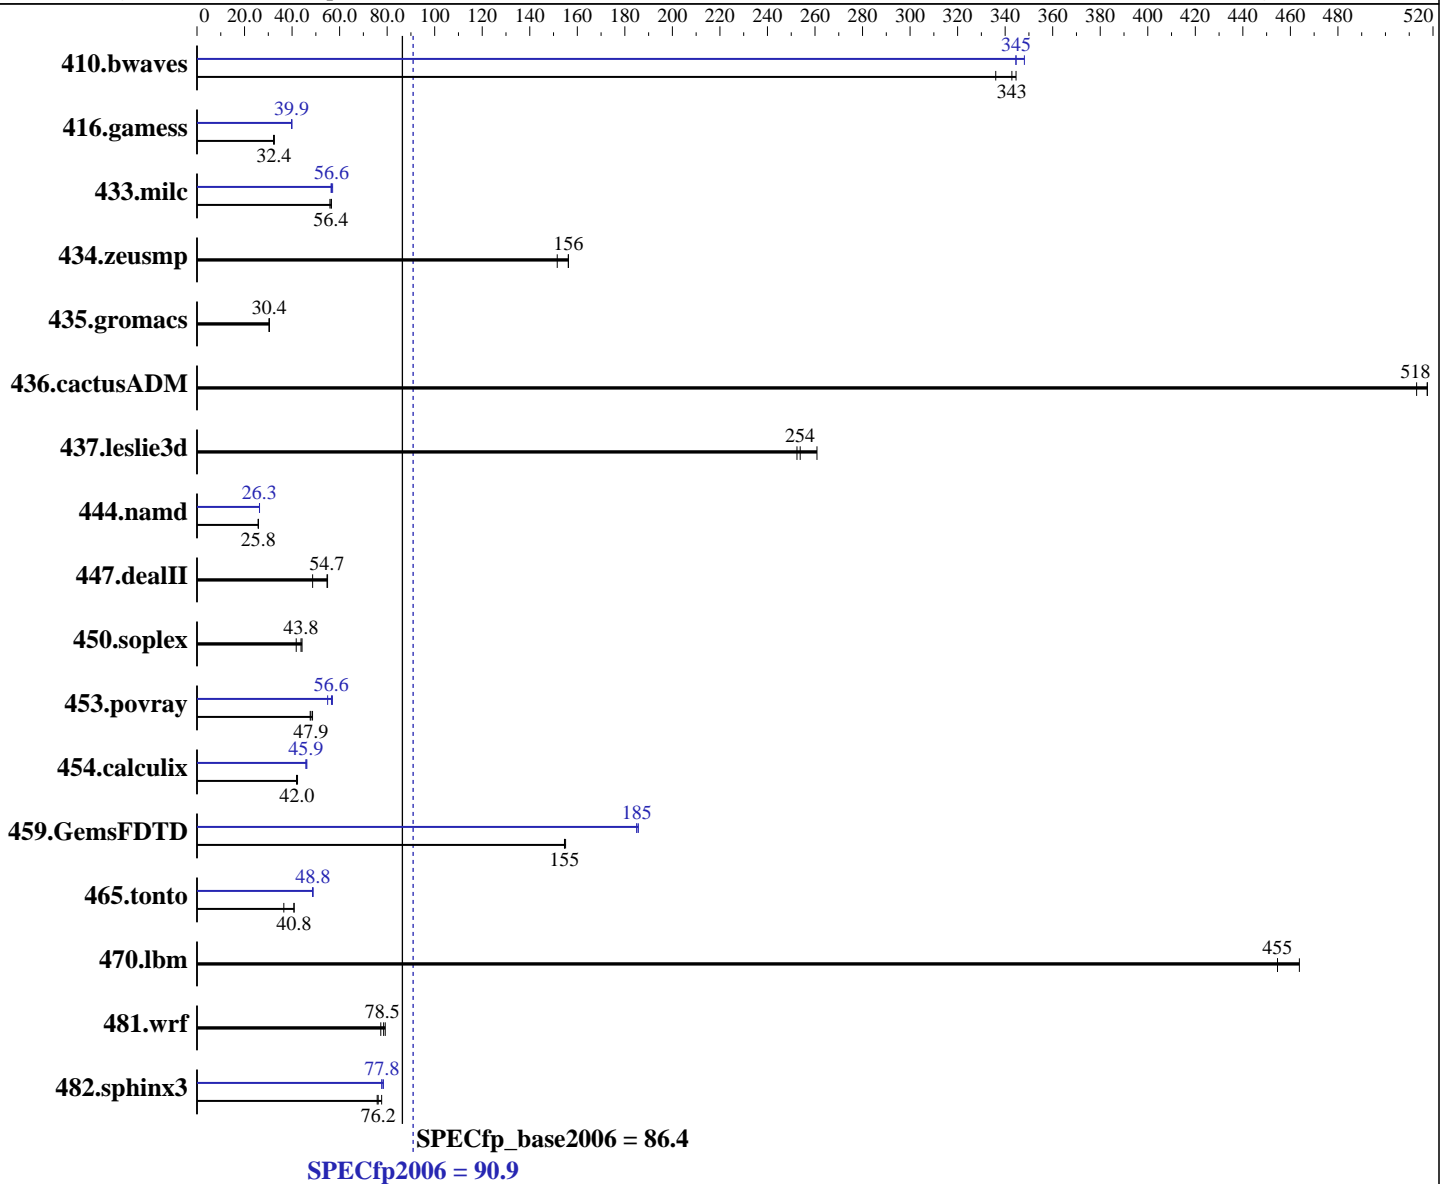

**Hardware**

CPU Name: Intel Xeon E5-2690  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.80 GHz  
 CPU MHz: 2900  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core  
 CPU(s) orderable: 2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

**Software**

Operating System: Red Hat Enterprise Linux Server release 6.3 (Santiago)  
 2.6.32-279.el6.x86\_64  
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;  
 Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp2006 = 90.9

Altos R380 F2 (Intel Xeon E5-2690)

SPECfp\_base2006 = 86.4

CPU2006 license: 97	Test date: Mar-2013
Test sponsor: Acer Incorporated	Hardware Availability: Apr-2013
Tested by: Acer Incorporated	Software Availability: Jun-2012

L3 Cache: 20 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)  
 Disk Subsystem: 1 x 1 TB SATA, 7200 RPM  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	40.4	336	39.4	345	<b><u>39.6</u></b>	<b><u>343</u></b>	<b><u>39.4</u></b>	<b><u>345</u></b>	39.4	345	39.0	348
416.gamess	602	32.5	608	32.2	<b><u>604</u></b>	<b><u>32.4</u></b>	491	39.9	492	39.8	<b><u>491</u></b>	<b><u>39.9</u></b>
433.milc	<b><u>163</u></b>	<b><u>56.4</u></b>	164	55.9	162	56.6	<b><u>162</u></b>	<b><u>56.6</u></b>	161	57.1	163	56.4
434.zeusmp	58.2	156	60.0	152	<b><u>58.2</u></b>	<b><u>156</u></b>	58.2	156	60.0	152	<b><u>58.2</u></b>	<b><u>156</u></b>
435.gromacs	235	30.4	235	30.3	<b><u>235</u></b>	<b><u>30.4</u></b>	235	30.4	235	30.3	<b><u>235</u></b>	<b><u>30.4</u></b>
436.cactusADM	23.1	518	<b><u>23.1</u></b>	<b><u>518</u></b>	23.3	513	<b><u>23.1</u></b>	518	<b><u>23.1</u></b>	<b><u>518</u></b>	23.3	513
437.leslie3d	<b><u>37.0</u></b>	<b><u>254</u></b>	37.2	252	36.0	261	<b><u>37.0</u></b>	<b><u>254</u></b>	37.2	252	36.0	261
444.namd	<b><u>311</u></b>	<b><u>25.8</u></b>	311	25.8	310	25.8	305	26.3	305	26.3	<b><u>305</u></b>	<b><u>26.3</u></b>
447.dealII	235	48.6	208	54.9	<b><u>209</u></b>	<b><u>54.7</u></b>	235	48.6	208	54.9	<b><u>209</u></b>	<b><u>54.7</u></b>
450.soplex	200	41.7	<b><u>191</u></b>	<b><u>43.8</u></b>	189	44.2	200	41.7	<b><u>191</u></b>	<b><u>43.8</u></b>	189	44.2
453.povray	<b><u>111</u></b>	<b><u>47.9</u></b>	109	48.6	112	47.6	96.8	55.0	93.4	57.0	<b><u>94.0</u></b>	<b><u>56.6</u></b>
454.calculix	195	42.3	<b><u>196</u></b>	<b><u>42.0</u></b>	197	41.9	178	46.2	180	45.9	<b><u>180</u></b>	<b><u>45.9</u></b>
459.GemsFDTD	68.4	155	68.6	155	<b><u>68.6</u></b>	<b><u>155</u></b>	<b><u>57.3</u></b>	<b><u>185</u></b>	57.1	186	57.3	185
465.tonto	241	40.9	<b><u>241</u></b>	<b><u>40.8</u></b>	269	36.5	202	48.8	202	48.6	<b><u>202</u></b>	<b><u>48.8</u></b>
470.lbm	30.2	455	<b><u>30.2</u></b>	<b><u>455</u></b>	29.6	464	30.2	455	<b><u>30.2</u></b>	<b><u>455</u></b>	29.6	464
481.wrf	141	79.2	<b><u>142</u></b>	<b><u>78.5</u></b>	144	77.3	141	79.2	<b><u>142</u></b>	<b><u>78.5</u></b>	144	77.3
482.sphinx3	<b><u>256</u></b>	<b><u>76.2</u></b>	257	75.8	251	77.7	248	78.4	251	77.7	<b><u>250</u></b>	<b><u>77.8</u></b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

Sysinfo program /usr/cpu2006/config/sysinfo.rev6800  
 \$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3  
 running on altosr380f2 Fri Mar 22 11:24:52 2013

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo  
 model name : Intel(R) Xeon(R) CPU E5-2690 0 @ 2.90GHz  
 Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Acer Incorporated**

**SPECfp2006 = 90.9**

**Altos R380 F2 (Intel Xeon E5-2690)**

**SPECfp\_base2006 = 86.4**

**CPU2006 license:** 97

**Test sponsor:** Acer Incorporated

**Tested by:** Acer Incorporated

**Test date:** Mar-2013

**Hardware Availability:** Apr-2013

**Software Availability:** Jun-2012

## Platform Notes (Continued)

```

2 "physical id"s (chips)
32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 8
siblings  : 16
physical 0: cores 0 1 2 3 4 5 6 7
physical 1: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB

From /proc/meminfo
MemTotal:      132114000 kB
HugePages_Total: 0
Hugepagesize:  2048 kB

/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.3 (Santiago)

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.3 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.3 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
Linux altosr380f2 2.6.32-279.el6.x86_64 #1 SMP Wed Jun 13 18:24:36 EDT 2012
x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Mar 22 11:07

SPEC is set to: /usr/cpu2006
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/mapper/vg_altosr380f2-lv_root
                ext4      913G  73G  794G   9% /

Additional information from dmidecode:
Memory:
16x Hynix HMT31GR7CFR4C-PB 8 GB 1600 MHz 2 rank

(End of data from sysinfo program)

```

## General Notes

Environment variables set by runspec before the start of the run:

```

KMP_AFFINITY = "granularity=fine,compact,1,0"
LD_LIBRARY_PATH = "/usr/cpu2006/libs/32:/usr/cpu2006/libs/64"
OMP_NUM_THREADS = "16"

```

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5  
Transparent Huge Pages enabled with:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated	SPECfp2006 =	90.9
Altos R380 F2 (Intel Xeon E5-2690)	SPECfp_base2006 =	86.4

CPU2006 license: 97	Test date:	Mar-2013
Test sponsor: Acer Incorporated	Hardware Availability:	Apr-2013
Tested by: Acer Incorporated	Software Availability:	Jun-2012

## General Notes (Continued)

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
Altos R360 F2 and Altos R380 F2 are electronically equivalent.
This result was measured on Altos R380 F2.
```

## Base Compiler Invocation

```
C benchmarks:
    icc -m64

C++ benchmarks:
    icpc -m64

Fortran benchmarks:
    ifort -m64

Benchmarks using both Fortran and C:
    icc -m64 ifort -m64
```

## Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deall: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

## Base Optimization Flags

```
C benchmarks:
    -xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
    -ansi-alias
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated	SPECfp2006 =	90.9
Altos R380 F2 (Intel Xeon E5-2690)	SPECfp_base2006 =	86.4

CPU2006 license: 97	Test date:	Mar-2013
Test sponsor: Acer Incorporated	Hardware Availability:	Apr-2013
Tested by: Acer Incorporated	Software Availability:	Jun-2012

## Base Optimization Flags (Continued)

C++ benchmarks:  
 -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias

Fortran benchmarks:  
 -xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:  
 -xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
 -ansi-alias

## Peak Compiler Invocation

C benchmarks:  
 icc -m64

C++ benchmarks:  
 icpc -m64

Fortran benchmarks:  
 ifort -m64

Benchmarks using both Fortran and C:  
 icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
 -ansi-alias

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll2 -ansi-alias  
 -parallel

C++ benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp2006 = 90.9

Altos R380 F2 (Intel Xeon E5-2690)

SPECfp\_base2006 = 86.4

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Mar-2013

Hardware Availability: Apr-2013

Software Availability: Jun-2012

## Peak Optimization Flags (Continued)

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

### Fortran benchmarks:

410.bwaves: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -parallel  
-static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll4

### Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated	SPECfp2006 =	90.9
Altos R380 F2 (Intel Xeon E5-2690)	SPECfp_base2006 =	86.4

<b>CPU2006 license:</b> 97	<b>Test date:</b> Mar-2013
<b>Test sponsor:</b> Acer Incorporated	<b>Hardware Availability:</b> Apr-2013
<b>Tested by:</b> Acer Incorporated	<b>Software Availability:</b> Jun-2012

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 15:44:28 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 9 April 2013.