



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**NEC Corporation**

Express5800/E110d-M (Intel Xeon E5-2407)

**SPECint®2006 = 32.4**

**SPECint\_base2006 = 30.7**

**CPU2006 license:** 9006


**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** Dec-2012

**Hardware Availability:** Dec-2012

**Software Availability:** Feb-2012

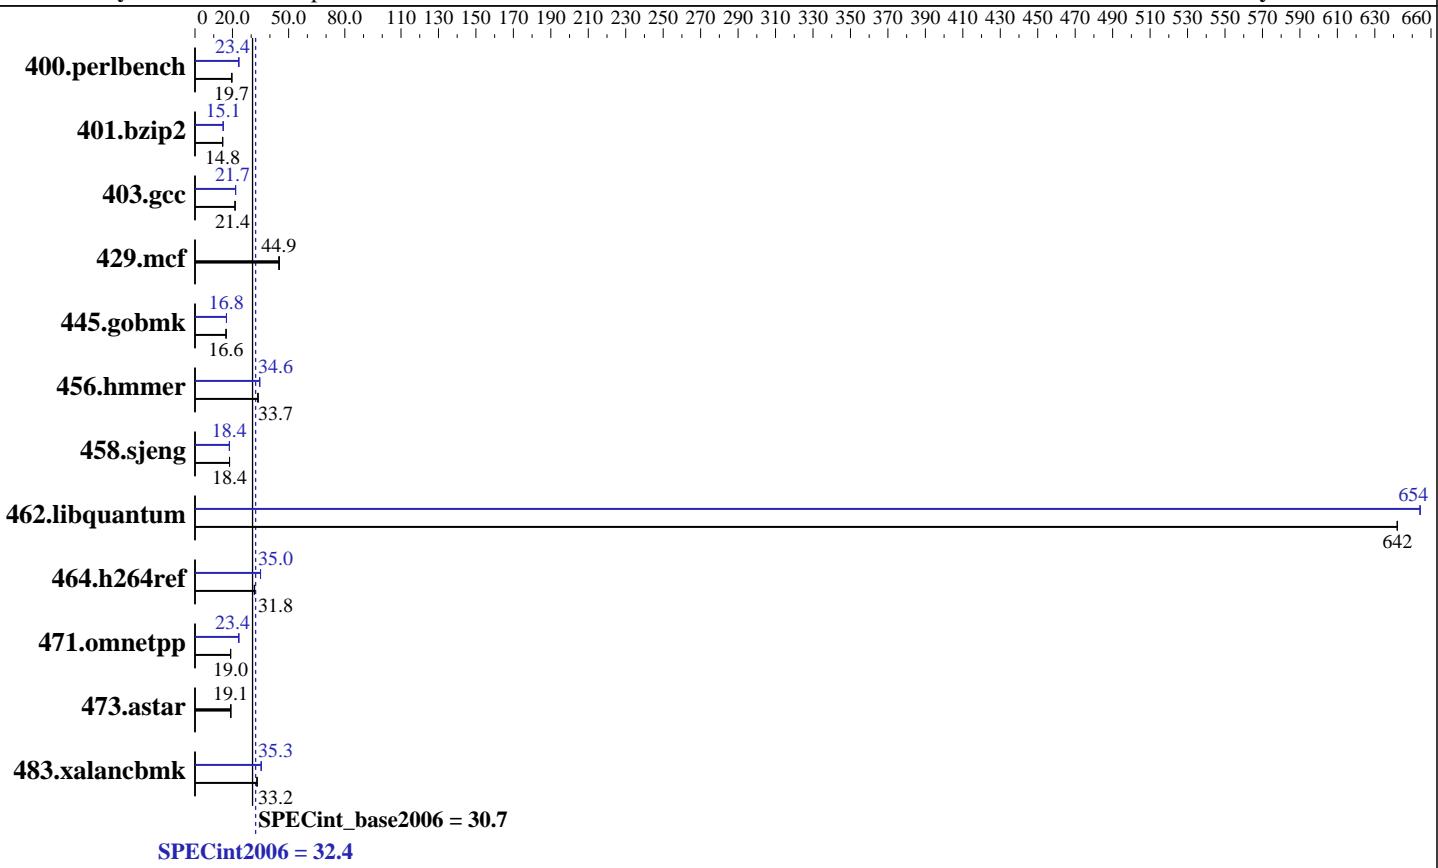

## Hardware

CPU Name: Intel Xeon E5-2407  
 CPU Characteristics:  
 CPU MHz: 2200  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 10 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 48 GB (6 x 8 GB 2Rx4 PC3L-12800R-11, ECC, running at 1066 MHz and CL7)  
 Disk Subsystem: 1 x 250 GB SATA, 7200 RPM  
 Other Hardware: None

## Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)  
 Compiler: Kernel 2.6.32-220.el6.x86\_64  
 Auto Parallel: C/C++: Version 12.1.3.293 of Intel C++ Studio XE for Linux;  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V8.1



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**NEC Corporation**

Express5800/E110d-M (Intel Xeon E5-2407)

**SPECint2006 = 32.4**

**SPECint\_base2006 = 30.7**

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** Dec-2012

**Hardware Availability:** Dec-2012

**Software Availability:** Feb-2012

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	<b>497</b>	<b>19.7</b>	498	19.6	496	19.7	<b>418</b>	<b>23.4</b>	417	23.4	<b>418</b>	<b>23.4</b>
401.bzip2	<b>653</b>	<b>14.8</b>	654	14.8	653	14.8	<b>640</b>	<b>15.1</b>	641	15.1	640	15.1
403.gcc	376	21.4	<b>376</b>	<b>21.4</b>	377	21.4	<b>371</b>	<b>21.7</b>	371	21.7	<b>371</b>	<b>21.7</b>
429.mcf	<b>203</b>	<b>44.9</b>	204	44.7	202	45.1	<b>203</b>	<b>44.9</b>	204	44.7	202	45.1
445.gobmk	632	16.6	<b>632</b>	<b>16.6</b>	633	16.6	<b>624</b>	<b>16.8</b>	<b>624</b>	<b>16.8</b>	624	16.8
456.hmmer	<b>277</b>	<b>33.7</b>	277	33.7	278	33.5	<b>270</b>	<b>34.5</b>	<b>270</b>	<b>34.6</b>	270	34.6
458.sjeng	<b>656</b>	<b>18.4</b>	656	18.4	656	18.4	<b>658</b>	<b>18.4</b>	660	18.3	658	18.4
462.libquantum	<b>32.3</b>	<b>642</b>	32.3	642	32.3	642	<b>31.7</b>	<b>654</b>	31.7	654	31.7	654
464.h264ref	695	31.9	<b>696</b>	<b>31.8</b>	700	31.6	<b>633</b>	<b>35.0</b>	632	35.0	633	35.0
471.omnetpp	328	19.0	<b>328</b>	<b>19.0</b>	329	19.0	<b>267</b>	<b>23.4</b>	268	23.3	<b>267</b>	<b>23.4</b>
473.astar	<b>367</b>	<b>19.1</b>	367	19.1	367	19.1	<b>367</b>	<b>19.1</b>	367	19.1	367	19.1
483.xalancbmk	<b>208</b>	<b>33.2</b>	208	33.2	209	33.1	<b>195</b>	<b>35.3</b>	195	35.4	<b>195</b>	<b>35.3</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Settings:

Energy Performance: Performance

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact,1,0"

LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64"

OMP\_NUM\_THREADS = "4"

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/E110d-M (Intel Xeon E5-2407)

**SPECint2006 = 32.4**

**SPECint\_base2006 = 30.7**

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** Dec-2012

**Hardware Availability:** Dec-2012

**Software Availability:** Feb-2012

## Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64  
401.bzip2: -DSPEC_CPU_LP64  
403.gcc: -DSPEC_CPU_LP64  
429.mcf: -DSPEC_CPU_LP64  
445.gobmk: -DSPEC_CPU_LP64  
456.hammer: -DSPEC_CPU_LP64  
458.sjeng: -DSPEC_CPU_LP64  
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX  
464.h264ref: -DSPEC_CPU_LP64  
471.omnetpp: -DSPEC_CPU_LP64  
473.astar: -DSPEC_CPU_LP64  
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
```

## Base Optimization Flags

C benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32
```

C++ benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-Wl,-z,muldefs -L/opt/SmartHeap_8.1/lib64 -lsmartheap64
```

## Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64
```

```
400.perlbench: icc -m32
```

```
445.gobmk: icc -m32
```

```
464.h264ref: icc -m32
```

C++ benchmarks (except as noted below):

```
icpc -m32
```

```
473.astar: icpc -m64
```



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**NEC Corporation**

Express5800/E110d-M (Intel Xeon E5-2407)

**SPECint2006 = 32.4**

**SPECint\_base2006 = 30.7**

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** Dec-2012

**Hardware Availability:** Dec-2012

**Software Availability:** Feb-2012

## Peak Portability Flags

```

400.perlbench: -DSPEC_CPU_LINUX_IA32
 401.bzip2: -DSPEC_CPU_LP64
   403.gcc: -DSPEC_CPU_LP64
   429.mcf: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
   458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
   473.astar: -DSPEC_CPU_LP64
 483.xalancbmk: -DSPEC_CPU_LINUX

```

## Peak Optimization Flags

C benchmarks:

```

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
               -opt-prefetch -ansi-alias

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32
               -opt-prefetch -ansi-alias

403.gcc: -xAVX -ipo -O3 -no-prec-div -inline-calloc
          -opt-malloc-options=3 -auto-ilp32

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
               -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32
               -ansi-alias

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
               -unroll14

462.libquantum: -xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch
               -auto-p32

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
               -unroll12 -ansi-alias

```

C++ benchmarks:

```

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
               -opt-ra-region-strategy=block -ansi-alias

```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/E110d-M (Intel Xeon E5-2407)

**SPECint2006 = 32.4**

**SPECint\_base2006 = 30.7**

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** Dec-2012

**Hardware Availability:** Dec-2012

**Software Availability:** Feb-2012

## Peak Optimization Flags (Continued)

471.omnetpp (continued):

-Wl,-z,muldefs -L/opt/SmartHeap\_8.1/lib -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias  
-Wl,-z,muldefs -L/opt/SmartHeap\_8.1/lib -lsmartheap

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html>  
<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120d-RevA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml>  
<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120d-RevA.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 15:43:20 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 9 April 2013.