



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Huawei

SPECint®2006 = 43.6

Huawei RH1288 V2 (Intel Xeon E5-2630 2.30 GHz)

SPECint\_base2006 = 40.7

CPU2006 license: 3175


Test date: Jun-2013

Test sponsor: Huawei

Hardware Availability: May-2012

Tested by: Huawei

Software Availability: Feb-2013

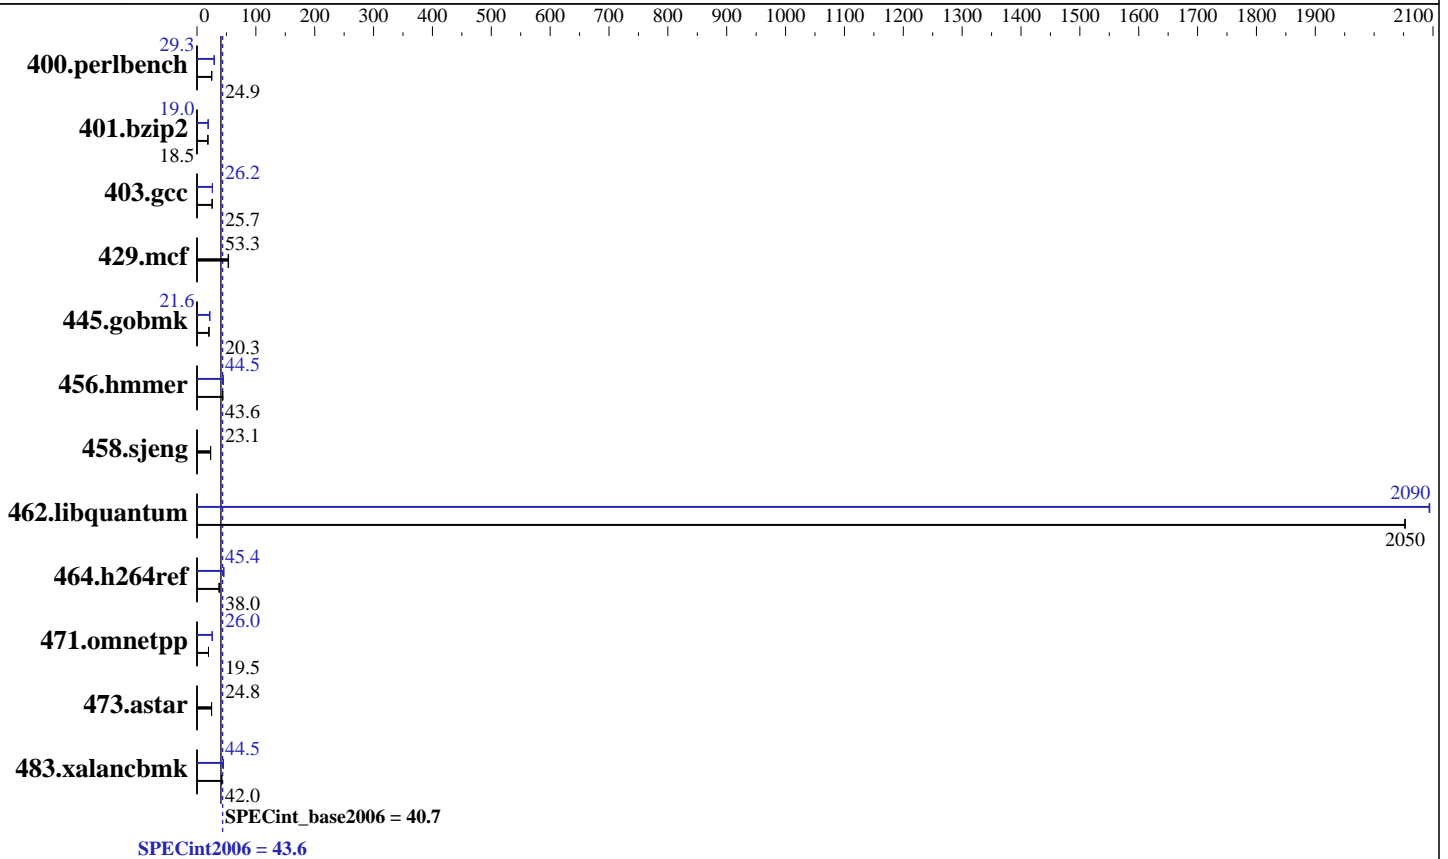

### Hardware

CPU Name: Intel Xeon E5-2630  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz  
 CPU MHz: 2300  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 15 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)  
 Disk Subsystem: 1 x 500 GB SATA, 7200 RPM  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)  
 2.6.32-358.el6.x86\_64  
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V9.01



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Huawei

SPECint2006 = 43.6

Huawei RH1288 V2 (Intel Xeon E5-2630 2.30 GHz)

SPECint\_base2006 = 40.7

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jun-2013

Hardware Availability: May-2012

Software Availability: Feb-2013

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	<b><u>392</u></b>	<b><u>24.9</u></b>	392	24.9	392	24.9	<b><u>334</u></b>	<b><u>29.3</u></b>	334	29.3	333	29.3
401.bzip2	<b><u>522</u></b>	<b><u>18.5</u></b>	522	18.5	522	18.5	508	19.0	509	19.0	<b><u>508</u></b>	<b><u>19.0</u></b>
403.gcc	312	25.8	<b><u>313</u></b>	<b><u>25.7</u></b>	313	25.7	308	26.2	<b><u>307</u></b>	<b><u>26.2</u></b>	307	26.2
429.mcf	172	53.0	170	53.7	<b><u>171</u></b>	<b><u>53.3</u></b>	172	53.0	170	53.7	<b><u>171</u></b>	<b><u>53.3</u></b>
445.gobmk	519	20.2	<b><u>517</u></b>	<b><u>20.3</u></b>	517	20.3	486	21.6	<b><u>486</u></b>	<b><u>21.6</u></b>	485	21.6
456.hammer	214	43.7	214	43.6	<b><u>214</u></b>	<b><u>43.6</u></b>	<b><u>210</u></b>	<b><u>44.5</u></b>	209	44.6	211	44.2
458.sjeng	524	23.1	<b><u>524</u></b>	<b><u>23.1</u></b>	524	23.1	524	23.1	<b><u>524</u></b>	<b><u>23.1</u></b>	524	23.1
462.libquantum	10.1	2050	10.1	2050	<b><u>10.1</u></b>	<b><u>2050</u></b>	9.90	2090	<b><u>9.90</u></b>	<b><u>2090</u></b>	9.89	2090
464.h264ref	<b><u>583</u></b>	<b><u>38.0</u></b>	595	37.2	581	38.1	487	45.4	<b><u>487</u></b>	<b><u>45.4</u></b>	487	45.5
471.omnetpp	320	19.5	<b><u>320</u></b>	<b><u>19.5</u></b>	320	19.6	<b><u>241</u></b>	<b><u>26.0</u></b>	240	26.0	244	25.6
473.astar	284	24.8	<b><u>284</u></b>	<b><u>24.8</u></b>	284	24.7	284	24.8	<b><u>284</u></b>	<b><u>24.8</u></b>	284	24.7
483.xalancbmk	165	41.9	164	42.1	<b><u>164</u></b>	<b><u>42.0</u></b>	<b><u>155</u></b>	<b><u>44.5</u></b>	154	44.8	155	44.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Select only test related files when installing the operating system

## Platform Notes

BIOS configuration:  
Set Power Efficiency Mode to Performance  
Baseboard Management Controller used to adjust the fan speed to 100%  
Sysinfo program /spec/config/sysinfo.rev6800  
\$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3  
running on localhost Mon Jun 3 16:52:44 2013

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2630 0 @ 2.30GHz
 2 "physical id"s (chips)
 12 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 6
siblings : 6
physical 0: cores 0 1 2 3 4 5
physical 1: cores 0 1 2 3 4 5
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Huawei

**SPECint2006 = 43.6**

Huawei RH1288 V2 (Intel Xeon E5-2630 2.30 GHz)

**SPECint\_base2006 = 40.7**

**CPU2006 license:** 3175

**Test date:** Jun-2013

**Test sponsor:** Huawei

**Hardware Availability:** May-2012

**Tested by:** Huawei

**Software Availability:** Feb-2013

### Platform Notes (Continued)

cache size : 15360 KB

From /proc/meminfo

```
MemTotal:      132117844 kB
HugePages_Total:    0
Hugepagesize:    2048 kB
```

/usr/bin/lsb\_release -d

```
Red Hat Enterprise Linux Server release 6.4 (Santiago)
```

From /etc/\*release\* /etc/\*version\*

```
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

uname -a:

```
Linux localhost 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41 EST 2013
x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Jun 3 16:50

SPEC is set to: /spec

```
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sda2        ext4      193G   66G  117G   37% /
```

Additional information from dmidecode:

(End of data from sysinfo program)

### General Notes

Environment variables set by runspec before the start of the run:

```
KMP_AFFINITY = "granularity=fine,compact,0,1"
LD_LIBRARY_PATH = "/spec/libs/32:/spec/libs/64"
OMP_NUM_THREADS = "12"
```

Binaries compiled on a system with 2 x Xeon X5645 CPU + 16GB memory using RHEL 6.1

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

### Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint2006 = 43.6

Huawei RH1288 V2 (Intel Xeon E5-2630 2.30 GHz)

SPECint\_base2006 = 40.7

CPU2006 license: 3175

Test date: Jun-2013

Test sponsor: Huawei

Hardware Availability: May-2012

Tested by: Huawei

Software Availability: Feb-2013

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
 401.bzip2: -DSPEC\_CPU\_LP64  
 403.gcc: -DSPEC\_CPU\_LP64  
 429.mcf: -DSPEC\_CPU\_LP64  
 445.gobmk: -DSPEC\_CPU\_LP64  
 456.hmmer: -DSPEC\_CPU\_LP64  
 458.sjeng: -DSPEC\_CPU\_LP64  
 462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
 464.h264ref: -DSPEC\_CPU\_LP64  
 471.omnetpp: -DSPEC\_CPU\_LP64  
 473.astar: -DSPEC\_CPU\_LP64  
 483.xalancbmk: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-Wl,-z,muldefs -L/smartheap -lsmartheap64

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

400.perlbench: icc -m32

445.gobmk: icc -m32

464.h264ref: icc -m32

C++ benchmarks (except as noted below):

icpc -m32

473.astar: icpc -m64



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint2006 = 43.6

Huawei RH1288 V2 (Intel Xeon E5-2630 2.30 GHz)

SPECint\_base2006 = 40.7

CPU2006 license: 3175

Test date: Jun-2013

Test sponsor: Huawei

Hardware Availability: May-2012

Tested by: Huawei

Software Availability: Feb-2013

## Peak Portability Flags

```

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
456.hmmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

```

## Peak Optimization Flags

C benchmarks:

```

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
               -opt-prefetch -ansi-alias

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
           -O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32
           -opt-prefetch -ansi-alias

403.gcc: -xAVX -ipo -O3 -no-prec-div -inline-calloc
         -opt-malloc-options=3 -auto-ilp32

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
          -ansi-alias

456.hmmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
           -ansi-alias

458.sjeng: basepeak = yes

462.libquantum: -xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch
               -auto-p32

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
             -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
             -unroll2 -ansi-alias

```

C++ benchmarks:

```

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
             -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
             -opt-ra-region-strategy=block -ansi-alias
             -Wl,-z,muldefs -L/smartheap -lsmartheap

```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint2006 = 43.6

Huawei RH1288 V2 (Intel Xeon E5-2630 2.30 GHz)

SPECint\_base2006 = 40.7

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jun-2013

Hardware Availability: May-2012

Software Availability: Feb-2013

## Peak Optimization Flags (Continued)

473.astar: basepeak = yes

483.xalancbmk: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias  
-Wl,-z,muldefs -L/smartheap -lsmartheap

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-revE.20121120.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-revE.20121120.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 15:46:29 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 18 June 2013.