



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 5038D-I (X10SLL-F, Intel Xeon E3-1285 v3, 3.60 GHz)

**SPECint®2006 = 63.4**

**SPECint\_base2006 = 60.9**

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

**Test date:** Jun-2013

**Hardware Availability:** Jun-2013

**Software Availability:** May-2013

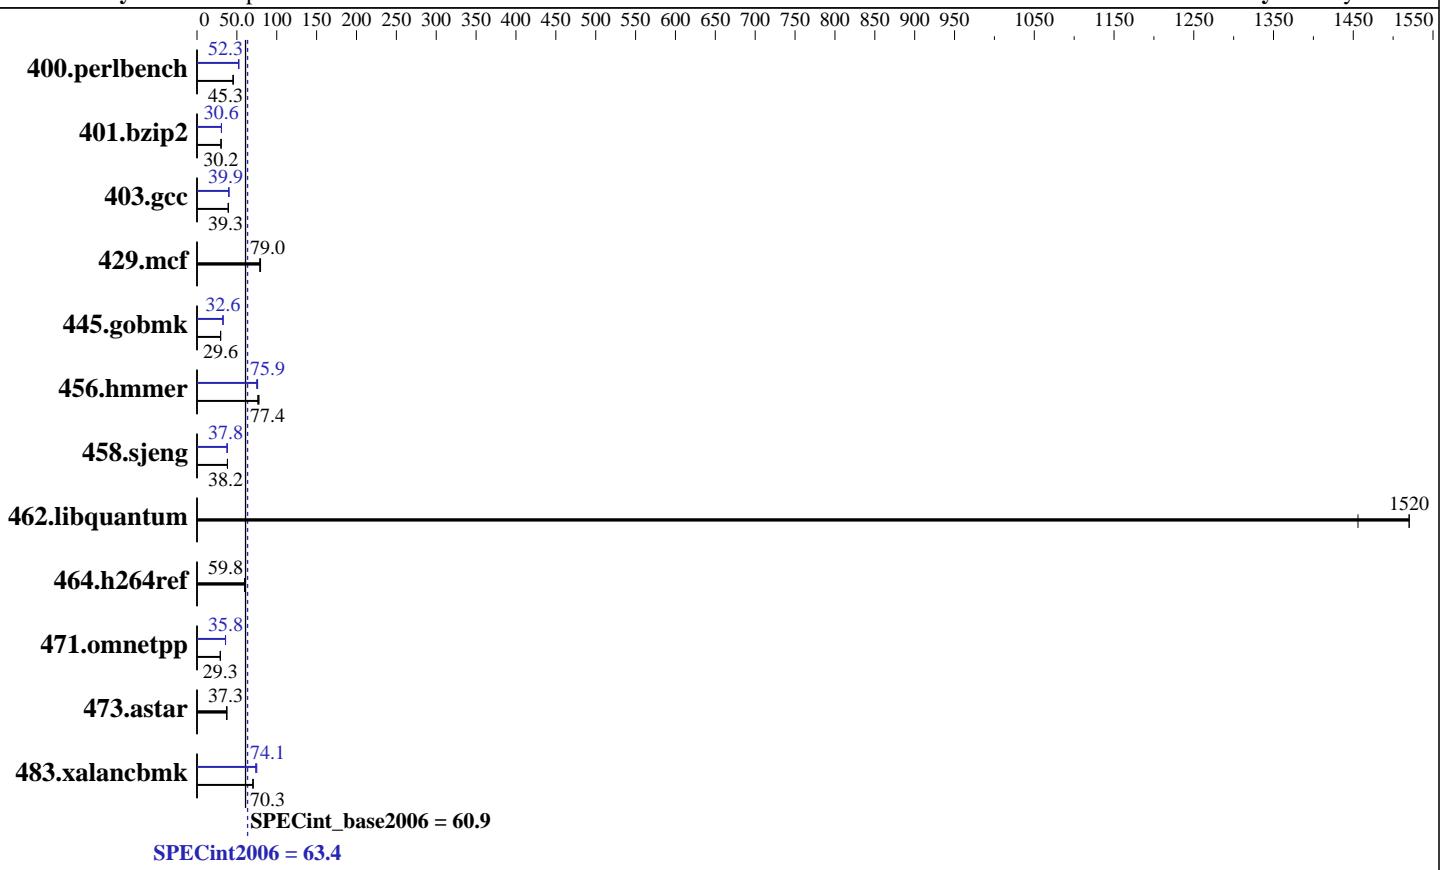

### Hardware

CPU Name:	Intel Xeon E3-1285 v3
CPU Characteristics:	Intel Turbo Boost Technology up to 4.00 GHz
CPU MHz:	3600
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip, 2 threads/core
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	8 MB I+D on chip per chip
Other Cache:	None
Memory:	32 GB (4 x 8 GB 2Rx4 PC3-12800E-11, ECC)
Disk Subsystem:	1 x 250 GB SATA I, 7200 RPM
Other Hardware:	None

### Software

Operating System:	Red Hat Enterprise Linux Server release 6.4, Kernel 2.6.32-358.el6.x86_64
Compiler:	C/C++: Version 13.1.1.163 of Intel C++ Studio XE for Linux
Auto Parallel:	Yes
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 5038D-I (X10SLL-F, Intel Xeon E3-1285 v3, 3.60 GHz)

**SPECint2006 = 63.4**

**SPECint\_base2006 = 60.9**

CPU2006 license: 001176

Test date: Jun-2013

Test sponsor: Supermicro

Hardware Availability: Jun-2013

Tested by: Supermicro

Software Availability: May-2013

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	216	45.2	215	45.5	<b>216</b>	<b>45.3</b>	187	52.2	<b>187</b>	<b>52.3</b>	186	52.4
401.bzip2	320	30.2	321	30.1	<b>320</b>	<b>30.2</b>	<b>315</b>	<b>30.6</b>	315	30.6	314	30.7
403.gcc	205	39.3	205	39.3	<b>205</b>	<b>39.3</b>	201	40.0	202	39.9	<b>202</b>	<b>39.9</b>
429.mcf	116	78.9	114	79.7	<b>116</b>	<b>79.0</b>	116	78.9	114	79.7	<b>116</b>	<b>79.0</b>
445.gobmk	354	29.6	355	29.5	<b>354</b>	<b>29.6</b>	322	32.6	322	32.6	<b>322</b>	<b>32.6</b>
456.hmmer	120	77.6	123	76.2	<b>121</b>	<b>77.4</b>	125	74.8	<b>123</b>	<b>75.9</b>	123	76.0
458.sjeng	317	38.2	<b>317</b>	<b>38.2</b>	317	38.2	320	37.8	<b>320</b>	<b>37.8</b>	320	37.8
462.libquantum	13.6	1520	<b>13.6</b>	<b>1520</b>	14.2	1460	13.6	1520	<b>13.6</b>	<b>1520</b>	14.2	1460
464.h264ref	370	59.8	<b>370</b>	<b>59.8</b>	369	59.9	370	59.8	<b>370</b>	<b>59.8</b>	369	59.9
471.omnetpp	<b>213</b>	<b>29.3</b>	214	29.2	213	29.3	<b>175</b>	35.7	<b>175</b>	35.8	<b>175</b>	<b>35.8</b>
473.astar	<b>188</b>	<b>37.3</b>	189	37.2	187	37.4	<b>188</b>	<b>37.3</b>	189	37.2	187	37.4
483.xalancbmk	98.0	70.4	98.6	70.0	<b>98.1</b>	<b>70.3</b>	92.0	75.0	<b>93.1</b>	<b>74.1</b>	93.6	73.7

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/usr/cpu2006/libs/32:/usr/cpu2006/libs/64:/usr/cpu2006/sh"  
OMP\_NUM\_THREADS = "4"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 5038D-I (X10SLL-F, Intel Xeon E3-1285 v3, 3.60 GHz)

**SPECint2006 = 63.4**

**SPECint\_base2006 = 60.9**

**CPU2006 license:** 001176

**Test date:** Jun-2013

**Test sponsor:** Supermicro

**Hardware Availability:** Jun-2013

**Tested by:** Supermicro

**Software Availability:** May-2013

## Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
 401.bzip2: -DSPEC_CPU_LP64
 403.gcc: -DSPEC_CPU_LP64
 429.mcf: -DSPEC_CPU_LP64
 445.gobmk: -DSPEC_CPU_LP64
 456.hammer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
 464.h264ref: -DSPEC_CPU_LP64
 471.omnetpp: -DSPEC_CPU_LP64
 473.astar: -DSPEC_CPU_LP64
 483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-Wl,-z,muldefs -L/sh -lsmartheap64
```

## Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64
```

```
400.perlbench: icc -m32
```

```
445.gobmk: icc -m32
```

C++ benchmarks (except as noted below):

```
icpc -m32
```

```
473.astar: icpc -m64
```



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 5038D-I (X10SLL-F, Intel Xeon E3-1285 v3, 3.60 GHz)

**SPECint2006 = 63.4**

**SPECint\_base2006 = 60.9**

**CPU2006 license:** 001176

**Test date:** Jun-2013

**Test sponsor:** Supermicro

**Hardware Availability:** Jun-2013

**Tested by:** Supermicro

**Software Availability:** May-2013

## Peak Portability Flags

```

400.perlbench: -DSPEC_CPU_LINUX_IA32
 401.bzip2: -DSPEC_CPU_LP64
   403.gcc: -DSPEC_CPU_LP64
   429.mcf: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
 464.h264ref: -DSPEC_CPU_LP64
   473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

```

## Peak Optimization Flags

C benchmarks:

```

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
               -opt-prefetch -ansi-alias

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32
               -opt-prefetch -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div -inline-calloc
          -opt-malloc-options=3 -auto-ilp32

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
               -ansi-alias

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32
               -ansi-alias

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
               -unroll4

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

```

C++ benchmarks:

```

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
               -opt-ra-region-strategy=block           -ansi-alias
               -Wl,-z,muldefs -L/sh -lsmartheap

```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 5038D-I (X10SLL-F, Intel Xeon E3-1285 v3, 3.60 GHz)

**SPECint2006 = 63.4**

**SPECint\_base2006 = 60.9**

**CPU2006 license:** 001176

**Test sponsor:** Supermicro

**Tested by:** Supermicro

**Test date:** Jun-2013

**Hardware Availability:** Jun-2013

**Software Availability:** May-2013

## Peak Optimization Flags (Continued)

473.astar: basepeak = yes

483.xalancbmk: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-ansi-alias -Wl,-z,muldefs -L/sh -lsmartheap

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revB.20130719.html>  
<http://www.spec.org/cpu2006/flags/Intel-ic13-official-linux64.20130702.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revB.20130719.xml>  
<http://www.spec.org/cpu2006/flags/Intel-ic13-official-linux64.20130702.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 16:40:27 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 19 July 2013.