



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL360e Gen8  
(2.10 GHz, Intel Xeon E5-2450)

**SPECint\_rate2006 = 560**

**SPECint\_rate\_base2006 = 541**

CPU2006 license: 3


Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

**Test date:** Jun-2013

**Hardware Availability:** Mar-2013

**Software Availability:** Jun-2013

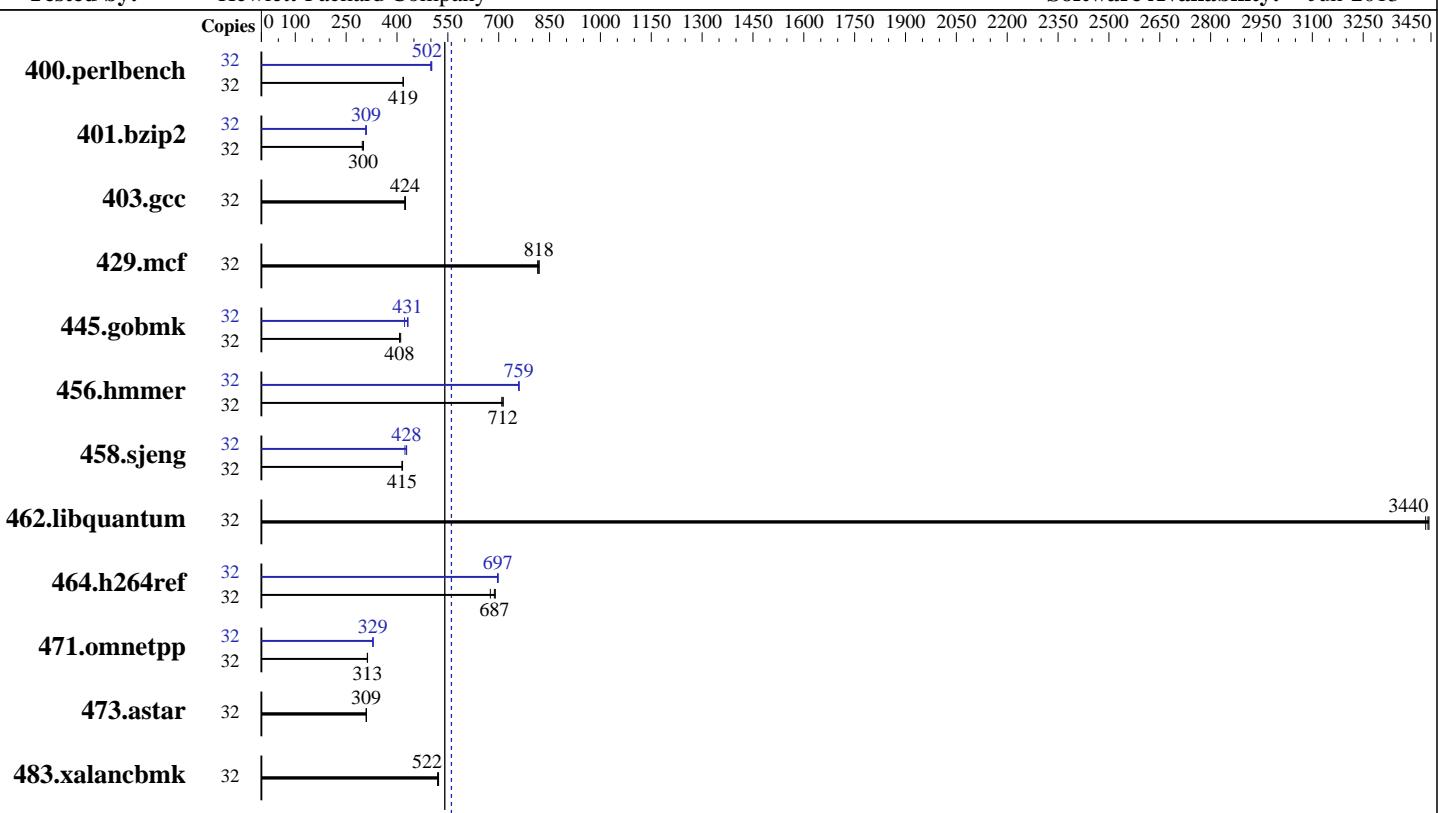

**SPECint\_rate\_base2006 = 541**

**SPECint\_rate2006 = 560**

### Hardware

CPU Name: Intel Xeon E5-2450  
CPU Characteristics: Intel Turbo Boost Technology up to 2.90 GHz  
CPU MHz: 2100  
FPU: Integrated  
CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core  
CPU(s) orderable: 1,2 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core  
L3 Cache: 20 MB I+D on chip per chip  
Other Cache: None  
Memory: 96 GB (12 x 8 GB 2Rx4 PC3-12800R-11, ECC)  
Disk Subsystem: 2 x 300 GB 10 K SAS, RAID 1  
Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)  
Compiler: 2.6.32-358.el6.x86\_64  
C/C++: Version 13.0.0.133 of Intel C++ Studio XE for Linux  
Auto Parallel: No  
File System: ext4  
System State: Run level 3 (multi-user)  
Base Pointers: 32-bit  
Peak Pointers: 32/64-bit  
Other Software: Microquill SmartHeap V10.0  
HP Array Configuration Utility, CLI version



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL360e Gen8  
(2.10 GHz, Intel Xeon E5-2450)

**SPECint\_rate2006 = 560**

**SPECint\_rate\_base2006 = 541**

CPU2006 license: 3

Test date: Jun-2013

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2013

Tested by: Hewlett-Packard Company

Software Availability: Jun-2013

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	32	747	419	<b>747</b>	<b>419</b>	748	418	32	626	500	622	503	<b>623</b>	<b>502</b>
401.bzip2	32	1026	301	1038	298	<b>1028</b>	<b>300</b>	32	<b>999</b>	<b>309</b>	1003	308	999	309
403.gcc	32	<b>607</b>	<b>424</b>	606	425	609	423	32	<b>607</b>	<b>424</b>	606	425	609	423
429.mcf	32	356	819	358	815	<b>357</b>	<b>818</b>	32	356	819	358	815	<b>357</b>	<b>818</b>
445.gobmk	32	824	408	<b>823</b>	<b>408</b>	817	411	32	776	433	795	422	<b>779</b>	<b>431</b>
456.hammer	32	419	713	421	709	<b>419</b>	<b>712</b>	32	<b>393</b>	<b>759</b>	393	760	393	759
458.sjeng	32	930	416	933	415	<b>932</b>	<b>415</b>	32	914	423	<b>905</b>	<b>428</b>	904	428
462.libquantum	32	<b>193</b>	<b>3440</b>	193	3430	193	3440	32	<b>193</b>	<b>3440</b>	193	3430	193	3440
464.h264ref	32	1026	690	<b>1030</b>	<b>687</b>	1049	675	32	1014	699	<b>1016</b>	<b>697</b>	1017	697
471.omnetpp	32	<b>639</b>	<b>313</b>	639	313	640	313	32	608	329	607	329	<b>608</b>	<b>329</b>
473.astar	32	<b>726</b>	<b>309</b>	725	310	726	309	32	<b>726</b>	<b>309</b>	725	310	726	309
483.xalancbmk	32	422	523	425	520	<b>423</b>	<b>522</b>	32	422	523	425	520	<b>423</b>	<b>522</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1 > /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
Accelerator Ratio for Reads/Writes set to = 100% Read / 0% Write
in HP Array Configuration Utility, CLI version
```

## Platform Notes

### BIOS Configuration:

- HP Power Profile set to Maximum Performance
- Collaborative Power Control set to Disabled
- Thermal Configuration set to Maximum Cooling
- Processor Power and Utilization Monitoring set to Disabled
- Memory Refresh Rate set to 1X

Sysinfo program /cpu2006/config/sysinfo.rev6818  
Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL360e Gen8  
(2.10 GHz, Intel Xeon E5-2450)

**SPECint\_rate2006 = 560**

**SPECint\_rate\_base2006 = 541**

**CPU2006 license:** 3

**Test date:** Jun-2013

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Mar-2013

**Tested by:** Hewlett-Packard Company

**Software Availability:** Jun-2013

## Platform Notes (Continued)

\$Rev: 6818 \$ \$Date::: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191  
running on dl360e-spec Mon Jun 24 14:14:06 2013

This section contains SUT (System Under Test) info as seen by  
some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E5-2450 0 @ 2.10GHz
        2 "physical id"s (chips)
        32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
    cpu cores : 8
    siblings   : 16
    physical 0: cores 0 1 2 3 4 5 6 7
    physical 1: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB
```

```
From /proc/meminfo
MemTotal:      99164032 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.4 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux dl360e-spec 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41 EST 2013
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jun 24 14:10
```

```
SPEC is set to: /cpu2006
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3        ext4  273G  137G  123G  53%  /
```

Additional information from dmidecode:

```
BIOS HP P73 03/01/2013
Memory:
 12x HP Not Specified 8 GB 1600 MHz 2 rank
```

(End of data from sysinfo program)



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL360e Gen8  
(2.10 GHz, Intel Xeon E5-2450)

**SPECint\_rate2006 = 560**

**SPECint\_rate\_base2006 = 541**

CPU2006 license: 3

Test date: Jun-2013

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2013

Tested by: Hewlett-Packard Company

Software Availability: Jun-2013

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/cpu2006/libs/32:/cpu2006/libs/64:/cpu2006/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB  
memory using RHEL5.5

## Base Compiler Invocation

C benchmarks:

icc -m32

C++ benchmarks:

icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
-Wl,-z,muldefs -L/sh -lsmartheap

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL360e Gen8  
(2.10 GHz, Intel Xeon E5-2450)

**SPECint\_rate2006 = 560**

**SPECint\_rate\_base2006 = 541**

**CPU2006 license:** 3

**Test sponsor:** Hewlett-Packard Company

**Tested by:** Hewlett-Packard Company

**Test date:** Jun-2013

**Hardware Availability:** Mar-2013

**Software Availability:** Jun-2013

## Peak Compiler Invocation (Continued)

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

401.bzip2: -DSPEC\_CPU\_LP64

456.hmmer: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4\_2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32

401.bzip2: -xSSE4\_2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: basepeak = yes

429.mcf: basepeak = yes

445.gobmk: -xSSE4\_2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4\_2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32

458.sjeng: -xSSE4\_2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll14 -auto-ilp32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL360e Gen8  
(2.10 GHz, Intel Xeon E5-2450)

**SPECint\_rate2006 = 560**

**SPECint\_rate\_base2006 = 541**

**CPU2006 license:** 3

**Test sponsor:** Hewlett-Packard Company

**Tested by:** Hewlett-Packard Company

**Test date:** Jun-2013

**Hardware Availability:** Mar-2013

**Software Availability:** Jun-2013

## Peak Optimization Flags (Continued)

462.libquantum: basepeak = yes

```
464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
              -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
              -unroll2 -ansi-alias
```

C++ benchmarks:

```
471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
              -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
              -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
              -L/sh -lsmartheap
```

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic13-official-linux64.html>  
<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-A.20120829.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic13-official-linux64.xml>  
<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-A.20120829.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 16:30:07 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 16 July 2013.