



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL320e Gen8  
(3.40 GHz, Intel Xeon E3-1240 v2)

**SPECint\_rate2006 = 190**

**SPECint\_rate\_base2006 = 184**

CPU2006 license: 3


Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

**Test date:** Jul-2013

**Hardware Availability:** Jun-2012

**Software Availability:** Feb-2013

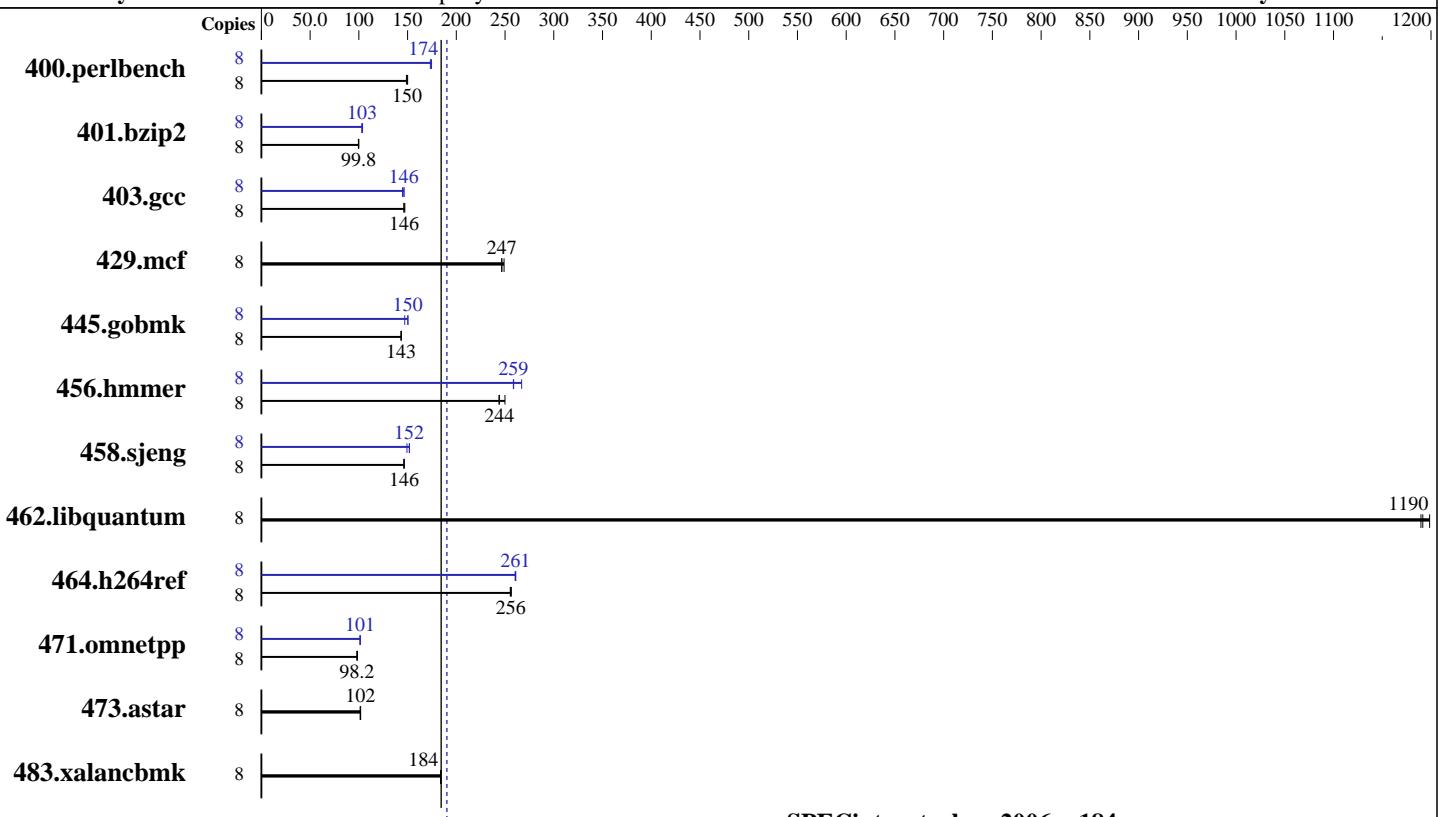

**SPECint\_rate\_base2006 = 184**

**SPECint\_rate2006 = 190**

### Hardware

CPU Name:	Intel Xeon E3-1240 v2
CPU Characteristics:	Intel Turbo Boost Technology up to 3.80 GHz
CPU MHz:	3400
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip, 2 threads/core
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	8 MB I+D on chip per chip
Other Cache:	None
Memory:	16 GB (2 x 8 GB 2Rx4 PC3-12800E-11, ECC, running at 1333 MHz and CL9)
Disk Subsystem:	1 x 500 GB 7.2 K SATA
Other Hardware:	None

### Software

Operating System:	Red Hat Enterprise Linux Server release 6.4, (Santiago) 2.6.32-358.el6.x86_64
Compiler:	C/C++: Version 13.1.1.163 of Intel C++ Studio XE for Linux
Auto Parallel:	No
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL320e Gen8  
(3.40 GHz, Intel Xeon E3-1240 v2)

**SPECint\_rate2006 = 190**

**SPECint\_rate\_base2006 = 184**

CPU2006 license: 3

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Jul-2013

Hardware Availability: Jun-2012

Software Availability: Feb-2013

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	521	150	525	149	<b>523</b>	<b>150</b>	8	448	175	<b>449</b>	<b>174</b>	451	173
401.bzip2	8	776	99.5	773	99.9	<b>773</b>	<b>99.8</b>	8	744	104	<b>746</b>	<b>103</b>	749	103
403.gcc	8	440	146	438	147	<b>440</b>	<b>146</b>	8	445	145	<b>440</b>	<b>146</b>	440	146
429.mcf	8	<b>296</b>	<b>247</b>	296	247	293	249	8	<b>296</b>	<b>247</b>	296	247	293	249
445.gobmk	8	586	143	584	144	<b>585</b>	<b>143</b>	8	<b>558</b>	<b>150</b>	558	150	571	147
456.hammer	8	299	250	<b>306</b>	<b>244</b>	306	244	8	289	259	280	267	<b>288</b>	<b>259</b>
458.sjeng	8	<b>661</b>	<b>146</b>	662	146	661	146	8	637	152	<b>638</b>	<b>152</b>	648	149
462.libquantum	8	139	1190	<b>139</b>	<b>1190</b>	138	1200	8	139	1190	<b>139</b>	<b>1190</b>	138	1200
464.h264ref	8	<b>692</b>	<b>256</b>	693	255	690	256	8	680	260	678	261	<b>679</b>	<b>261</b>
471.omnetpp	8	<b>509</b>	<b>98.2</b>	510	98.0	507	98.6	8	494	101	493	101	<b>493</b>	<b>101</b>
473.astar	8	551	102	554	101	<b>553</b>	<b>102</b>	8	551	102	554	101	<b>553</b>	<b>102</b>
483.xalancbmk	8	<b>300</b>	<b>184</b>	299	184	300	184	8	<b>300</b>	<b>184</b>	299	184	300	184

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/transparent\_hugepage/enabled  
Filesystem page cache cleared with:  
echo 1 > /proc/sys/vm/drop\_caches  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

## Platform Notes

BIOS Configuration:  
HP Power Regulator set to HP Static High Performance Mode  
Thermal Configuration set to Maximum Cooling

Sysinfo program /cpu2006/config/sysinfo.rev6818  
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\\$ e86d102572650a6e4d596a3cee98f191  
running on dl360e-gen8-tlm Mon Jul 15 15:31:48 2013

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL320e Gen8  
(3.40 GHz, Intel Xeon E3-1240 v2)

**SPECint\_rate2006 = 190**

**SPECint\_rate\_base2006 = 184**

**CPU2006 license:** 3

**Test date:** Jul-2013

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Jun-2012

**Tested by:** Hewlett-Packard Company

**Software Availability:** Feb-2013

## Platform Notes (Continued)

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E3-1240 V2 @ 3.40GHz
        1 "physical id"s (chips)
        8 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The
    following excerpts from /proc/cpuinfo might not be reliable. Use with
    caution.)
        cpu cores : 4
        siblings : 8
        physical 0: cores 0 1 2 3
    cache size : 8192 KB
```

```
From /proc/meminfo
    MemTotal:       16292284 kB
    HugePages_Total:       0
    Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
    Red Hat Enterprise Linux Server release 6.3 (Santiago)
```

```
From /etc/*release* /etc/*version*
    redhat-release: Red Hat Enterprise Linux Server release 6.3 (Santiago)
    system-release: Red Hat Enterprise Linux Server release 6.3 (Santiago)
    system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
    Linux dl360e-gen8-tlm 2.6.32-279.el6.x86_64 #1 SMP Wed Jun 13 18:24:36 EDT
    2012 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jul 15 15:18
```

```
SPEC is set to: /cpu2006
    Filesystem      Type  Size  Used Avail Use% Mounted on
    /dev/sda3        ext4  457G   18G  416G   5%  /
```

Additional information from dmidecode:

```
    BIOS HP J05 01/11/2013
    Memory:
        2x HP Not Specified 8 GB 1333 MHz 2 rank
        2x UNKNOWN Not Specified
```

(End of data from sysinfo program)

Regarding the sysinfo display about the memory installed, the correct amount of memory is 16 GB and the dmidecode description should have one line reading as:

```
    2x HP Not Specified 8 GB 1333 MHz 2 rank
```

The corrected dmidecode information above is accurate even though 2 x PC3-12800E DIMMs were used as the processor downclocks the memory to 1333 MHz, not the rated 1600 MHz of the PC3-12800E DIMMs.



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL320e Gen8  
(3.40 GHz, Intel Xeon E3-1240 v2)

**SPECint\_rate2006 = 190**

**SPECint\_rate\_base2006 = 184**

**CPU2006 license:** 3

**Test sponsor:** Hewlett-Packard Company

**Tested by:** Hewlett-Packard Company

**Test date:** Jul-2013

**Hardware Availability:** Jun-2012

**Software Availability:** Feb-2013

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact,1,0"

LD\_LIBRARY\_PATH = "/cpu2006/libc2/32:/cpu2006/libc2/64"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5

## Base Compiler Invocation

C benchmarks:

  icc -m32

C++ benchmarks:

  icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

  -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:

  -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
  -Wl,-z,muldefs -L/sh -lsmartheap

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

  icc -m32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL320e Gen8  
(3.40 GHz, Intel Xeon E3-1240 v2)

**SPECint\_rate2006 = 190**

**SPECint\_rate\_base2006 = 184**

**CPU2006 license:** 3

**Test sponsor:** Hewlett-Packard Company

**Tested by:** Hewlett-Packard Company

**Test date:** Jul-2013

**Hardware Availability:** Jun-2012

**Software Availability:** Feb-2013

## Peak Compiler Invocation (Continued)

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:

`icpc -m32`

## Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`

401.bzip2: `-DSPEC_CPU_LP64`

456.hmmer: `-DSPEC_CPU_LP64`

458.sjeng: `-DSPEC_CPU_LP64`

462.libquantum: `-DSPEC_CPU_LINUX`

483.xalancbmk: `-DSPEC_CPU_LINUX`

## Peak Optimization Flags

C benchmarks:

400.perlbench: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`  
`-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)`  
`-auto-ilp32`

401.bzip2: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`  
`-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)`  
`-opt-prefetch -auto-ilp32 -ansi-alias`

403.gcc: `-xSSE4.2 -ipo -O3 -no-prec-div`

429.mcf: `basepeak = yes`

445.gobmk: `-xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)`  
`-ansi-alias -opt-mem-layout-trans=3`

456.hmmer: `-xSSE4.2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32`

458.sjeng: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`  
`-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)`  
`-unroll14 -auto-ilp32`

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL320e Gen8  
(3.40 GHz, Intel Xeon E3-1240 v2)

**SPECint\_rate2006 = 190**

**SPECint\_rate\_base2006 = 184**

**CPU2006 license:** 3

**Test sponsor:** Hewlett-Packard Company

**Tested by:** Hewlett-Packard Company

**Test date:** Jul-2013

**Hardware Availability:** Jun-2012

**Software Availability:** Feb-2013

## Peak Optimization Flags (Continued)

462.libquantum: basepeak = yes

```
464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
              -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
              -unroll2 -ansi-alias
```

C++ benchmarks:

```
471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
              -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
              -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
              -L/sh -lsmartheap
```

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html>  
<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-A.20120425.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml>  
<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-A.20120425.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 16:32:08 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 30 July 2013.