



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro A+ Server 1022G-URF  
(H8DGPU-F Rev 2.01, AMD Opteron 6348)

SPECint®\_rate2006 = 490

SPECint\_rate\_base2006 = 427

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jul-2013

Hardware Availability: Nov-2012

Software Availability: Mar-2013

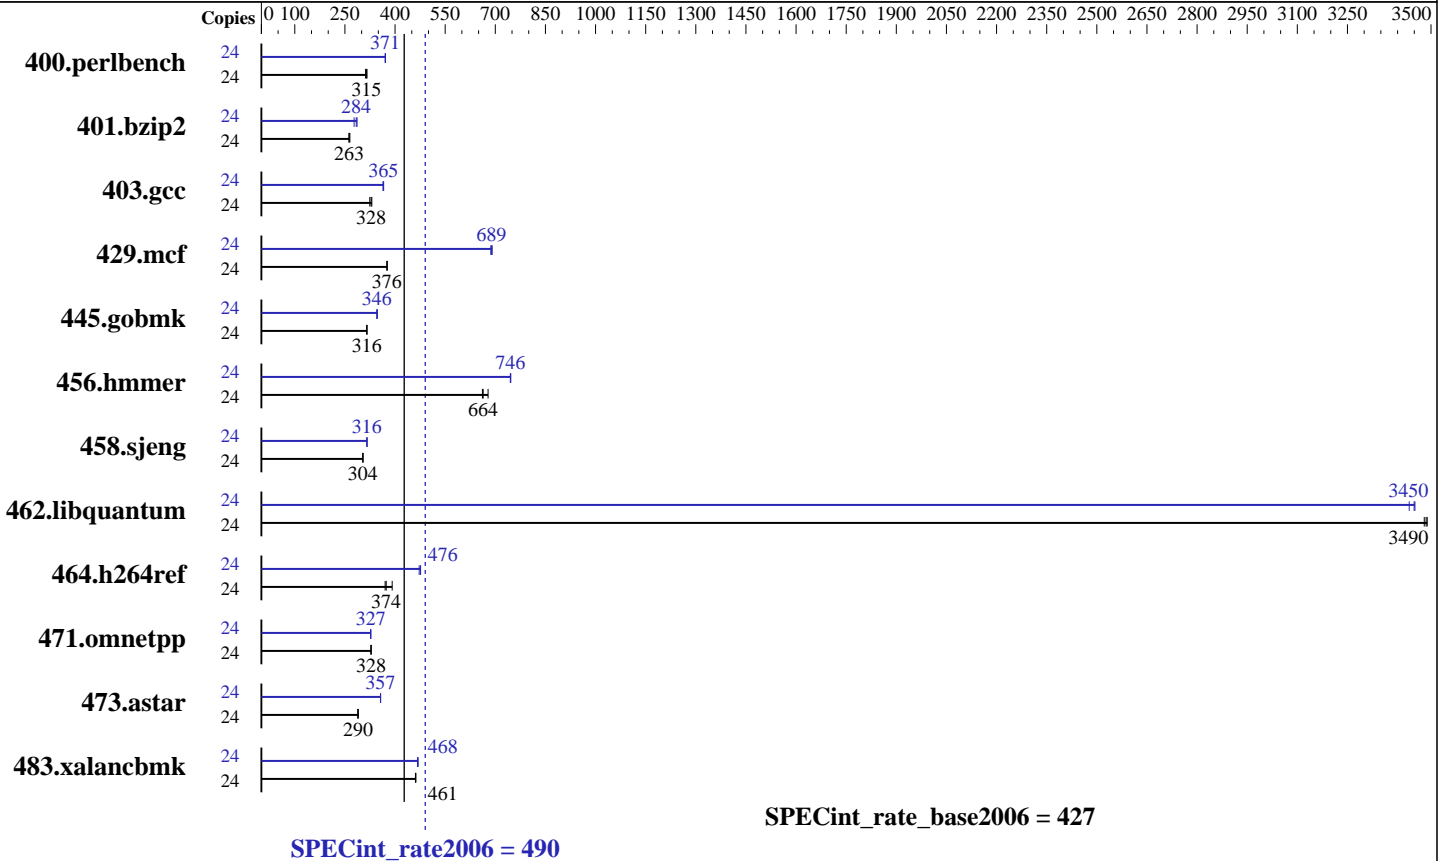

### Hardware

CPU Name: AMD Opteron 6348  
 CPU Characteristics: AMD Turbo CORE technology up to 3.40 GHz  
 CPU MHz: 2800  
 FPU: Integrated  
 CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 384 KB I on chip per chip,  
 64 KB I shared / 2 cores;  
 16 KB D on chip per core  
 Secondary Cache: 12 MB I+D on chip per chip, 2 MB shared / 2 cores  
 L3 Cache: 16 MB I+D on chip per chip, 8 MB shared / 6 cores  
 Other Cache: None  
 Memory: 128 GB (8 x 16 GB 2Rx4 PC3-12800R-11, ECC)  
 Disk Subsystem: 1 x 500 GB SATAIII, 7200 RPM  
 Other Hardware: None

### Software

Operating System: CentOS 6.4,  
 Kernel 2.6.32-358.el6.x86\_64  
 Compiler: C/C++: Version 4.5.2 of x86 Open64 Compiler Suite  
 (from AMD)  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (Full multiuser with network)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: SmartHeap 10.0 32-bit Library for Linux



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro A+ Server 1022G-URF  
(H8DGPU-F Rev 2.01, AMD Opteron 6348)

SPECint\_rate2006 = 490

SPECint\_rate\_base2006 = 427

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Jul-2013  
Hardware Availability: Nov-2012  
Software Availability: Mar-2013

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	<b>744</b>	<b>315</b>	752	312	742	316	24	633	371	<b>632</b>	<b>371</b>	631	371
401.bzip2	24	875	265	<b>882</b>	<b>263</b>	884	262	24	<b>816</b>	<b>284</b>	835	278	809	286
403.gcc	24	596	324	585	331	<b>589</b>	<b>328</b>	24	528	366	531	364	<b>529</b>	<b>365</b>
429.mcf	24	<b>582</b>	<b>376</b>	582	376	582	376	24	<b>318</b>	<b>689</b>	317	691	319	687
445.gobmk	24	798	315	797	316	<b>797</b>	<b>316</b>	24	725	347	728	346	<b>728</b>	<b>346</b>
456.hammer	24	330	678	<b>337</b>	<b>664</b>	339	661	24	301	745	300	746	<b>300</b>	<b>746</b>
458.sjeng	24	955	304	957	303	<b>956</b>	<b>304</b>	24	920	316	<b>919</b>	<b>316</b>	919	316
462.libquantum	24	143	3480	<b>143</b>	<b>3490</b>	143	3490	24	145	3430	<b>144</b>	<b>3450</b>	144	3450
464.h264ref	24	<b>1422</b>	<b>374</b>	1357	391	1434	370	24	1115	476	<b>1115</b>	<b>476</b>	1125	472
471.omnetpp	24	457	328	457	328	<b>457</b>	<b>328</b>	24	458	327	<b>459</b>	<b>327</b>	459	327
473.astar	24	<b>582</b>	<b>290</b>	584	289	582	290	24	473	356	472	357	<b>472</b>	<b>357</b>
483.xalancbmk	24	358	462	<b>359</b>	<b>461</b>	359	461	24	354	467	<b>354</b>	<b>468</b>	353	469

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set transparent\_hugepage=never as a boot parameter in /boot/grub/menu.lst

Set vm/nr\_hugepages=21504 in /etc/sysctl.conf  
mount -t hugetlbfs nodev /mnt/hugepages

## General Notes

Environment variables set by runspec before the start of the run:

HUGETLB\_LIMIT = "896"

LD\_LIBRARY\_PATH = "/home/cpu2006/amd1206-rate-libs-revA/32:/home/cpu2006/amd1206-rate-libs-revA/64"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at  
<http://developer.amd.com/cpu/open64>

Binaries were compiled on a system with 2x AMD Opteron 6386SE chips + 128GB Memory using RHEL 6.3



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro A+ Server 1022G-URF  
(H8DGU-F Rev 2.01, AMD Opteron 6348)

SPECint\_rate2006 = 490

SPECint\_rate\_base2006 = 427

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Jul-2013  
Hardware Availability: Nov-2012  
Software Availability: Mar-2013

## Base Compiler Invocation

C benchmarks:  
opencc

C++ benchmarks:  
openCC

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
403.gcc: -DSPEC\_CPU\_LP64  
429.mcf: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-Ofast -CG:local\_sched\_alg=1 -INLINE:aggressive=ON -IPA:plimit=8000  
-IPA:small\_pu=100 -HP:bd=2m:heap=2m -mso -LNO:prefetch=2  
-march=bdver1

C++ benchmarks:  
-Ofast -m32 -INLINE:aggressive=on -CG:cmp\_peep=on -D\_\_OPEN64\_FAST\_SET  
-march=bdver1 -L/root/work/libraries/SmartHeap-10/lib -lsmarheap

## Peak Compiler Invocation

C benchmarks:  
opencc

C++ benchmarks:  
openCC

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro A+ Server 1022G-URF  
(H8DGU-F Rev 2.01, AMD Opteron 6348)

SPECint\_rate2006 = 490

SPECint\_rate\_base2006 = 427

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jul-2013

Hardware Availability: Nov-2012

Software Availability: Mar-2013

## Peak Portability Flags (Continued)

```

401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalanbmk: -DSPEC_CPU_LINUX

```

## Peak Optimization Flags

C benchmarks:

```

400.perlbench: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
               -LNO:prefetch=2 -LNO:opt=0 -IPA:plimit=20000
               -OPT:unroll_times_max=8 -OPT:unroll_size=256
               -OPT:unroll_level=2 -OPT:keep_ext=on -WOPT:if_conv=0
               -WOPT:sib=on -CG:local_sched_alg=1 -CG:unroll_fb_req=on
               -CG:movext_icmp=off -HP:bd=2m:heap=2m -march=bdver1
               -GRA:aggr_loop_splitting=off -GRA:loop_splitting=off

401.bzip2: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -O3
            -LNO:prefetch=2 -LNO:pf2=0 -OPT:alias=disjoint
            -OPT:goto=off -CG:local_sched_alg=1 -HP:bd=2m:heap=2m
            -march=bdver2

403.gcc: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
          -LNO:trip_count=256 -CG:cmp_peep=on -CG:pre_minreg_level=2
          -m32 -HP:bd=2m:heap=2m -GRA:unspill=on -IPA:small_pu=200
          -WOPT:sib=on -march=bdver2 -mno-fma4

429.mcf: -O3 -OPT:unroll_times_max=5 -ipa -INLINE:aggressive=on
          -CG:gcm=off -CG:dsched=on -GRA:prioritize_by_density=on
          -m32 -HP:bd=2m:heap=2m -mso -march=bdver1

445.gobmk: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
            -OPT:unroll_size=256 -OPT:unroll_times_max=8
            -OPT:keep_ext=on -IPA:plimit=750 -IPA:min_hotness=300
            -IPA:pu_reorder=1 -LNO:ignore_feedback=off -WOPT:if_conv=2
            -HP:bd=2m:heap=2m -march=bdver1

456.hmmer: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
            -LNO:prefetch=2 -OPT:alias=disjoint
            -OPT:unroll_times_max=16 -OPT:unroll_size=512
            -OPT:unroll_level=2 -OPT:keep_ext=on -CG:cflow=0
            -CG:cmp_peep=on -CG:pre_local_sched=off -HP:bd=2m:heap=2m
            -CG:p2align=0 -CG:load_exe=3 -CG:dsched=on -march=bdver1

```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro A+ Server 1022G-URF  
(H8DGPU-F Rev 2.01, AMD Opteron 6348)

**SPECint\_rate2006 = 490**

**SPECint\_rate\_base2006 = 427**

**CPU2006 license:** 001176

**Test sponsor:** Supermicro

**Tested by:** Supermicro

**Test date:** Jul-2013

**Hardware Availability:** Nov-2012

**Software Availability:** Mar-2013

## Peak Optimization Flags (Continued)

458.sjeng: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast  
-CG:ptr\_load\_use=0 -CG:divrem\_opt=on -CG:movext\_icmp=off  
-CG:locs\_best=on -LNO:full\_unroll=10 -IPA:pu\_reorder=2  
-HP:heap=2m:bd=2m -WOPT:sib=on -march=bdver1

462.libquantum: -Ofast -mso -OPT:unroll\_size=512 -OPT:unroll\_times\_max=16  
-LNO:prefetch=2 -LNO:prefetch\_ahead=4 -LNO:pf2=0  
-CG:local\_sched\_alg=1 -CG:p2align=0 -INLINE:aggressive=ON  
-IPA:plimit=15000 -IPA:small\_pu=100  
-HP:bd=2m:heap=2m,limit=300 -march=bdver2

464.h264ref: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -O3  
-OPT:unroll\_size=256 -OPT:unroll\_times\_max=2  
-IPA:plimit=20000 -OPT:alias=disjoint -CG:ptr\_load\_use=0  
-CG:local\_sched\_alg=1 -HP:bd=2m:heap=2m -march=bdver1

C++ benchmarks:

471.omnetpp: -Ofast -m32 -INLINE:aggressive=on -CG:cmp\_peep=on  
-WOPT:sib=on -D\_\_OPEN64\_FAST\_SET -march=bdver2 -mno-fma4  
-L/root/work/libraries/SmartHeap-10/lib -lsmarheap

473.astar: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast  
-WOPT:if\_conv=0 -WOPT:sib=on -CG:divrem\_opt=on  
-CG:p2align=1 -CG:dsched=on -GRA:optimize\_boundary=on  
-OPT:alias=disjoint -INLINE:aggressive=on  
-IPA:small\_pu=3000 -IPA:plimit=3000 -HP:bd=2m:heap=2m  
-march=bdver1

483.xalancbmk: -Ofast -LNO:prefetch=2 -OPT:unroll\_size=512  
-OPT:unroll\_times\_max=8 -D\_\_OPEN64\_FAST\_SET  
-INLINE:aggressive=on -m32 -CG:cmp\_peep=on  
-CG:local\_sched=off -CG:p2align=1 -GRA:unspill=on  
-TENV:frame\_pointer=off -fno-emit-exceptions -march=bdver2  
-mno-fma4  
-L/root/work/libraries/SmartHeap-10/lib -lsmarheap

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-452-flags-rate-revA-I.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/x86-open64-452-flags-rate-revA-I.xml>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro A+ Server 1022G-URF  
(H8DGPU-F Rev 2.01, AMD Opteron 6348)

SPECint\_rate2006 = 490

SPECint\_rate\_base2006 = 427

**CPU2006 license:** 001176

**Test sponsor:** Supermicro

**Tested by:** Supermicro

**Test date:** Jul-2013

**Hardware Availability:** Nov-2012

**Software Availability:** Mar-2013

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 16:15:28 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 9 September 2013.