



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant BL460c Gen8  
(2.20 GHz, Intel Xeon E5-2660 v2)

**SPECint\_rate2006 = 748**

**SPECint\_rate\_base2006 = 722**

CPU2006 license: 3


Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

**Test date:** Sep-2013

**Hardware Availability:** Sep-2013

**Software Availability:** Sep-2013

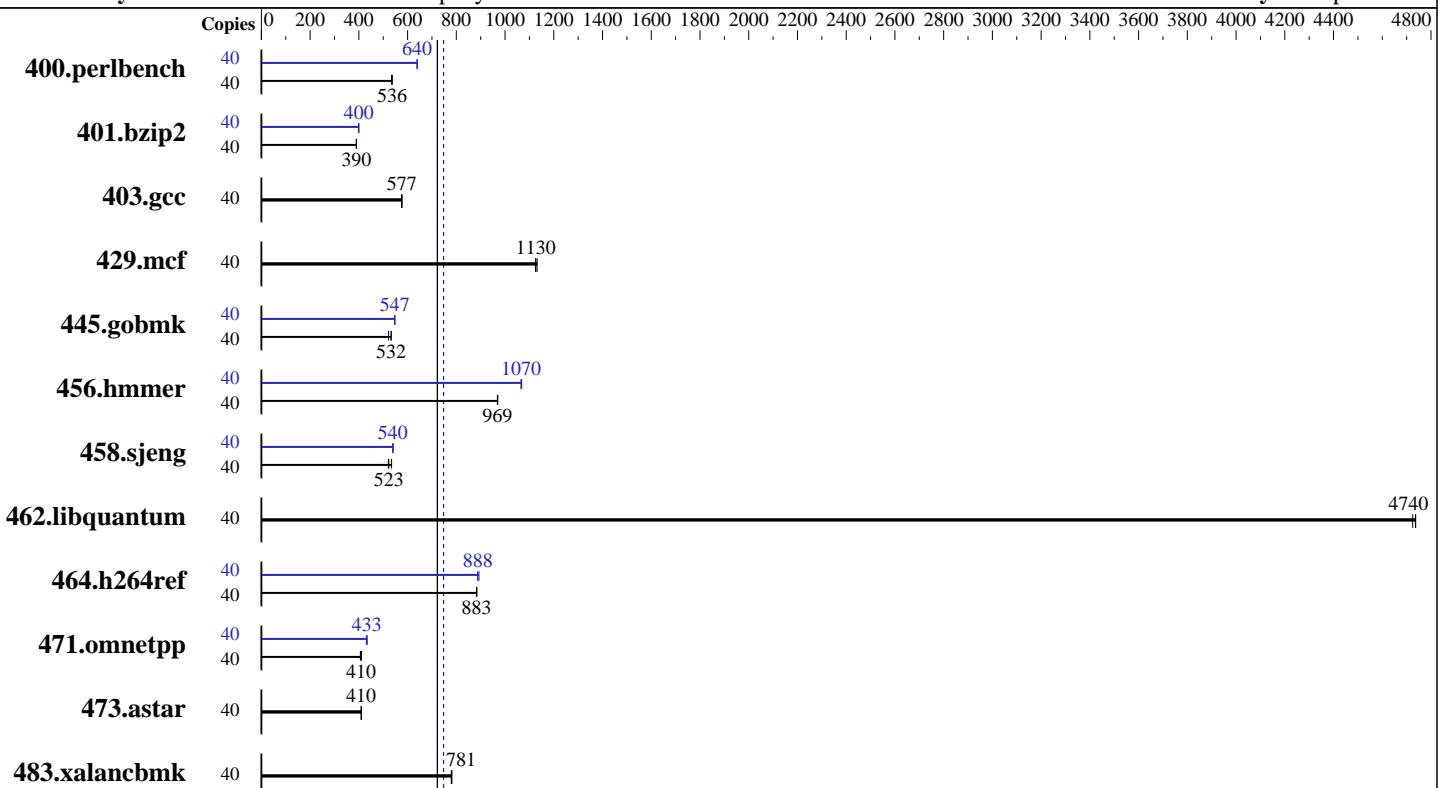

**SPECint\_rate\_base2006 = 722**

**SPECint\_rate2006 = 748**

### Hardware

CPU Name: Intel Xeon E5-2660 v2  
CPU Characteristics: Intel Turbo Boost Technology up to 3.00 GHz  
CPU MHz: 2200  
FPU: Integrated  
CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip, 2 threads/core  
CPU(s) orderable: 1,2 chip  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core  
L3 Cache: 25 MB I+D on chip per chip  
Other Cache: None  
Memory: 128 GB (16 x 8 GB 2Rx4 PC3-14900R-13, ECC)  
Disk Subsystem: 1 x 300 GB SAS SSD, RAID 1  
Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)  
Compiler: Kernel version 2.6.32-358.el6.x86\_64  
Auto Parallel: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux  
File System: ext4  
System State: Run level 3 (multi-user)  
Base Pointers: 32-bit  
Peak Pointers: 32/64-bit  
Other Software: Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant BL460c Gen8  
(2.20 GHz, Intel Xeon E5-2660 v2)

**SPECint\_rate2006 = 748**

**SPECint\_rate\_base2006 = 722**

CPU2006 license: 3

Test date: Sep-2013

Test sponsor: Hewlett-Packard Company

Hardware Availability: Sep-2013

Tested by: Hewlett-Packard Company

Software Availability: Sep-2013

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	40	<b>729</b>	<b>536</b>	732	534	728	537	40	610	640	612	639	<b>611</b>	<b>640</b>
401.bzip2	40	<b>990</b>	<b>390</b>	989	390	991	389	40	967	399	965	400	<b>966</b>	<b>400</b>
403.gcc	40	558	577	560	575	<b>558</b>	<b>577</b>	40	558	577	560	575	<b>558</b>	<b>577</b>
429.mcf	40	322	1130	324	1130	<b>324</b>	<b>1130</b>	40	322	1130	324	1130	<b>324</b>	<b>1130</b>
445.gobmk	40	804	522	787	533	<b>788</b>	<b>532</b>	40	<b>766</b>	<b>547</b>	766	547	767	547
456.hammer	40	<b>385</b>	<b>969</b>	385	970	385	969	40	349	1070	<b>350</b>	<b>1070</b>	350	1070
458.sjeng	40	906	534	<b>926</b>	<b>523</b>	928	521	40	897	540	<b>897</b>	<b>540</b>	896	540
462.libquantum	40	<b>175</b>	<b>4740</b>	175	4720	175	4740	40	<b>175</b>	<b>4740</b>	175	4720	175	4740
464.h264ref	40	<b>1002</b>	<b>883</b>	1001	884	1002	883	40	991	893	997	887	<b>997</b>	<b>888</b>
471.omnetpp	40	<b>610</b>	<b>410</b>	615	406	609	411	40	<b>577</b>	434	580	431	<b>577</b>	<b>433</b>
473.astar	40	684	410	685	410	<b>685</b>	<b>410</b>	40	684	410	685	410	<b>685</b>	<b>410</b>
483.xalancbmk	40	354	779	353	782	<b>354</b>	<b>781</b>	40	354	779	353	782	<b>354</b>	<b>781</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1 > /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

Disabled unused Linux services through "stop\_services.sh" before running.

## Platform Notes

BIOS Configuration:

HP Power Profile set to Maximum Performance

Memory Power Savings Mode set to Maximum Performance

Collaborative Power Control set to Disabled

Dynamic Power Capping Functionality set to Disabled

Thermal Configuration set to Maximum Cooling

Processor Power and Utilization Monitoring set to Disabled

Memory Refresh Rate set to 1x

Sysinfo program /cpu2006/config/sysinfo.rev6818

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant BL460c Gen8  
(2.20 GHz, Intel Xeon E5-2660 v2)

**SPECint\_rate2006 = 748**

**SPECint\_rate\_base2006 = 722**

**CPU2006 license:** 3

**Test date:** Sep-2013

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Sep-2013

**Tested by:** Hewlett-Packard Company

**Software Availability:** Sep-2013

## Platform Notes (Continued)

\$Rev: 6818 \$ \$Date::: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191  
running on BL460cGen8-BT-Sys2 Fri Sep 20 18:28:09 2013

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E5-2660 v2 @ 2.20GHz
        2 "physical id"s (chips)
        40 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
    cpu cores : 10
    siblings : 20
    physical 0: cores 0 1 2 3 4 8 9 10 11 12
    physical 1: cores 0 1 2 3 4 8 9 10 11 12
cache size : 25600 KB
```

```
From /proc/meminfo
    MemTotal:       132119288 kB
    HugePages_Total:      0
    Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
    Red Hat Enterprise Linux Server release 6.4 (Santiago)
```

```
From /etc/*release* /etc/*version*
    redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
    system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
    system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
    Linux BL460cGen8-BT-Sys2 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41 EST
    2013 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Sep 20 18:25
```

```
SPEC is set to: /cpu2006
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3        ext4  268G   14G  240G   6%  /
```

Additional information from dmidecode:

```
    BIOS HP I31 09/08/2013
    Memory:
        16x HP 712382-071 8 GB 1866 MHz 2 rank
```

(End of data from sysinfo program)

Regarding the sysinfo display about the CPU cores from /proc/cpuinfo, the correct mapping should display as cores 0 through 9. The mapping should read as the following:

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant BL460c Gen8  
(2.20 GHz, Intel Xeon E5-2660 v2)

**SPECint\_rate2006 = 748**

**SPECint\_rate\_base2006 = 722**

**CPU2006 license:** 3

**Test sponsor:** Hewlett-Packard Company

**Tested by:** Hewlett-Packard Company

**Test date:** Sep-2013

**Hardware Availability:** Sep-2013

**Software Availability:** Sep-2013

## Platform Notes (Continued)

```
physical 0: cores 0 1 2 3 4 5 6 7 8 9
physical 1: cores 0 1 2 3 4 5 6 7 8 9
```

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/cpu2006/lib32:/cpu2006/lib64:/cpu2006/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB  
memory using RedHat EL 6.4

## Base Compiler Invocation

C benchmarks:

```
icc -m32
```

C++ benchmarks:

```
icpc -m32
```

## Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX
```

## Base Optimization Flags

C benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
-Wl,-z,muldefs -L/sh -lsmartheap
```

## Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=__alloca
```



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant BL460c Gen8  
(2.20 GHz, Intel Xeon E5-2660 v2)

**SPECint\_rate2006 = 748**

**SPECint\_rate\_base2006 = 722**

**CPU2006 license:** 3

**Test date:** Sep-2013

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Sep-2013

**Tested by:** Hewlett-Packard Company

**Software Availability:** Sep-2013

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

401.bzip2: -DSPEC\_CPU\_LP64

456.hmmer: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: basepeak = yes

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll14 -auto-ilp32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant BL460c Gen8  
(2.20 GHz, Intel Xeon E5-2660 v2)

**SPECint\_rate2006 = 748**

**SPECint\_rate\_base2006 = 722**

**CPU2006 license:** 3

**Test sponsor:** Hewlett-Packard Company

**Tested by:** Hewlett-Packard Company

**Test date:** Sep-2013

**Hardware Availability:** Sep-2013

**Software Availability:** Sep-2013

## Peak Optimization Flags (Continued)

462.libquantum: basepeak = yes

```
464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
              -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
              -unroll12 -ansi-alias
```

C++ benchmarks:

```
471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
              -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
              -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
              -L/sh -lsmartheap
```

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>  
<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-revB.20131009.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>  
<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-revB.20131009.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 17:04:37 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 9 October 2013.