



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint®\_rate2006 = 186

PowerEdge R620 (Intel Xeon E5-2603 v2, 1.80 GHz)

SPECint\_rate\_base2006 = 180

CPU2006 license: 55


Test date: Sep-2013

Test sponsor: Dell Inc.

Hardware Availability: Sep-2013

Tested by: Dell Inc.

Software Availability: Sep-2013

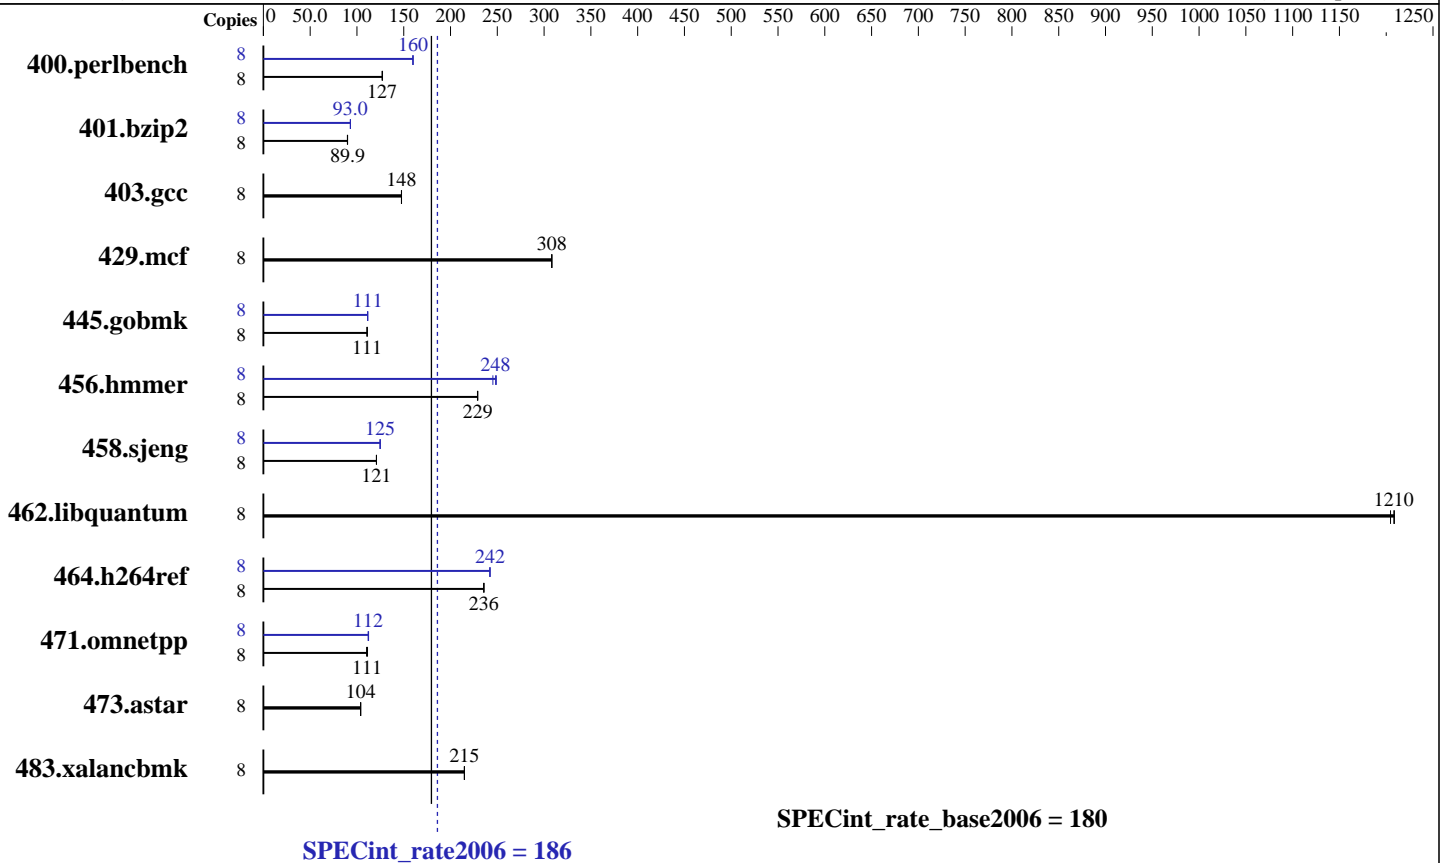

## Hardware

CPU Name: Intel Xeon E5-2603 v2  
 CPU Characteristics: 1800  
 CPU MHz: 1800  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 10 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (16 x 16 GB 2Rx4 PC3-14900R-13, ECC, running at 1333 MHz)  
 Disk Subsystem: 1 x 300 GB 15000 RPM SAS  
 Other Hardware: None

## Software

Operating System: SUSE Linux Enterprise Server 11 SP3 (x86\_64) 3.0.76-0.11-default  
 Compiler: C/C++; Version 14.0.0.080 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: ext2  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 186

PowerEdge R620 (Intel Xeon E5-2603 v2, 1.80 GHz)

SPECint\_rate\_base2006 = 180

CPU2006 license: 55

Test date: Sep-2013

Test sponsor: Dell Inc.

Hardware Availability: Sep-2013

Tested by: Dell Inc.

Software Availability: Sep-2013

## Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	614	127	616	127	<b>615</b>	<b>127</b>	8	489	160	<b>489</b>	<b>160</b>	489	160
401.bzip2	8	858	90.0	<b>858</b>	<b>89.9</b>	860	89.8	8	<b>830</b>	<b>93.0</b>	829	93.1	831	92.9
403.gcc	8	436	148	<b>436</b>	<b>148</b>	436	148	8	436	148	<b>436</b>	<b>148</b>	436	148
429.mcf	8	237	308	<b>237</b>	<b>308</b>	237	308	8	237	308	<b>237</b>	<b>308</b>	237	308
445.gobmk	8	<b>756</b>	<b>111</b>	756	111	758	111	8	752	112	<b>753</b>	<b>111</b>	754	111
456.hammer	8	326	229	326	229	<b>326</b>	<b>229</b>	8	<b>301</b>	<b>248</b>	300	249	304	245
458.sjeng	8	801	121	801	121	<b>801</b>	<b>121</b>	8	<b>775</b>	<b>125</b>	776	125	775	125
462.libquantum	8	<b>137</b>	<b>1210</b>	137	1210	138	1200	8	<b>137</b>	<b>1210</b>	137	1210	138	1200
464.h264ref	8	751	236	752	235	<b>751</b>	<b>236</b>	8	<b>731</b>	<b>242</b>	731	242	731	242
471.omnetpp	8	449	111	<b>451</b>	<b>111</b>	453	110	8	446	112	<b>446</b>	<b>112</b>	445	112
473.astar	8	540	104	541	104	<b>540</b>	<b>104</b>	8	540	104	541	104	<b>540</b>	<b>104</b>
483.xalancbmk	8	257	215	257	215	<b>257</b>	<b>215</b>	8	257	215	257	215	<b>257</b>	<b>215</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS settings:  
Virtualization Technology disabled  
Execute Disable disabled  
Logical Processor enabled  
System Profile set to Performance  
Sysinfo program /root/cpu2006.1.2.ic13/config/sysinfo.rev6818  
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191  
running on linux Sun Sep 22 19:07:05 2013

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) CPU E5-2603 v2 @ 1.80GHz  
2 "physical id"s (chips)  
8 "processors"

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 186

PowerEdge R620 (Intel Xeon E5-2603 v2, 1.80 GHz)

SPECint\_rate\_base2006 = 180

CPU2006 license: 55

Test date: Sep-2013

Test sponsor: Dell Inc.

Hardware Availability: Sep-2013

Tested by: Dell Inc.

Software Availability: Sep-2013

## Platform Notes (Continued)

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 4
siblings  : 4
physical 0: cores 0 1 2 3
physical 1: cores 0 1 2 3
cache size : 10240 KB
```

From /proc/meminfo

```
MemTotal:      264634596 kB
HugePages_Total:    0
Hugepagesize:    2048 kB
```

/usr/bin/lsb\_release -d

```
SUSE Linux Enterprise Server 11 (x86_64)
```

From /etc/\*release\* /etc/\*version\*

```
SuSE-release:
SUSE Linux Enterprise Server 11 (x86_64)
VERSION = 11
PATCHLEVEL = 3
```

uname -a:

```
Linux linux 3.0.76-0.11-default #1 SMP Fri Jun 14 08:21:43 UTC 2013 (ccab990)
x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Sep 22 18:54 last=S

SPEC is set to: /root/cpu2006.1.2.ic13

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2        ext2  267G  11G  256G   4% /
```

Additional information from dmidecode:

```
BIOS Dell Inc. 2.0.19 08/29/2013
Memory:
6x 00AD00B300AD HMT42GR7MFR4C-RD 16 GB 1333 MHz
10x 00AD04B300AD HMT42GR7AFR4C-RD 16 GB 1333 MHz
```

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/root/cpu2006.1.2.ic13/libs/32:/root/cpu2006.1.2.ic13/libs/64:/root/cpu2006.1.2.ic13/sh"
```

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Filesystem page cache cleared with:

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 186

PowerEdge R620 (Intel Xeon E5-2603 v2, 1.80 GHz)

SPECint\_rate\_base2006 = 180

CPU2006 license: 55

Test date: Sep-2013

Test sponsor: Dell Inc.

Hardware Availability: Sep-2013

Tested by: Dell Inc.

Software Availability: Sep-2013

## General Notes (Continued)

```
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```

## Base Compiler Invocation

C benchmarks:  
icc -m32  
C++ benchmarks:  
icpc -m32

## Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX
```

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
-Wl,-z,muldefs -L/sh -lsmartheap

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m32  
400.perlbench: icc -m64  
401.bzip2: icc -m64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 186

PowerEdge R620 (Intel Xeon E5-2603 v2, 1.80 GHz)

SPECint\_rate\_base2006 = 180

CPU2006 license: 55

Test date: Sep-2013

Test sponsor: Dell Inc.

Hardware Availability: Sep-2013

Tested by: Dell Inc.

Software Availability: Sep-2013

## Peak Compiler Invocation (Continued)

456.hmmr: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

401.bzip2: -DSPEC\_CPU\_LP64

456.hmmr: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: basepeak = yes

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -opt-mem-layout-trans=3

456.hmmr: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 186

PowerEdge R620 (Intel Xeon E5-2603 v2, 1.80 GHz)

SPECint\_rate\_base2006 = 180

CPU2006 license: 55

Test date: Sep-2013

Test sponsor: Dell Inc.

Hardware Availability: Sep-2013

Tested by: Dell Inc.

Software Availability: Sep-2013

## Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revB.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 18:43:45 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 22 October 2013.