



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECfp®\_rate2006 = 433

ProLiant DL380p Gen8  
(2.60 GHz, Intel Xeon E5-2630 v2)

SPECfp\_rate\_base2006 = 424

CPU2006 license: 3


Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Sep-2013

Hardware Availability: Sep-2013

Software Availability: Sep-2013

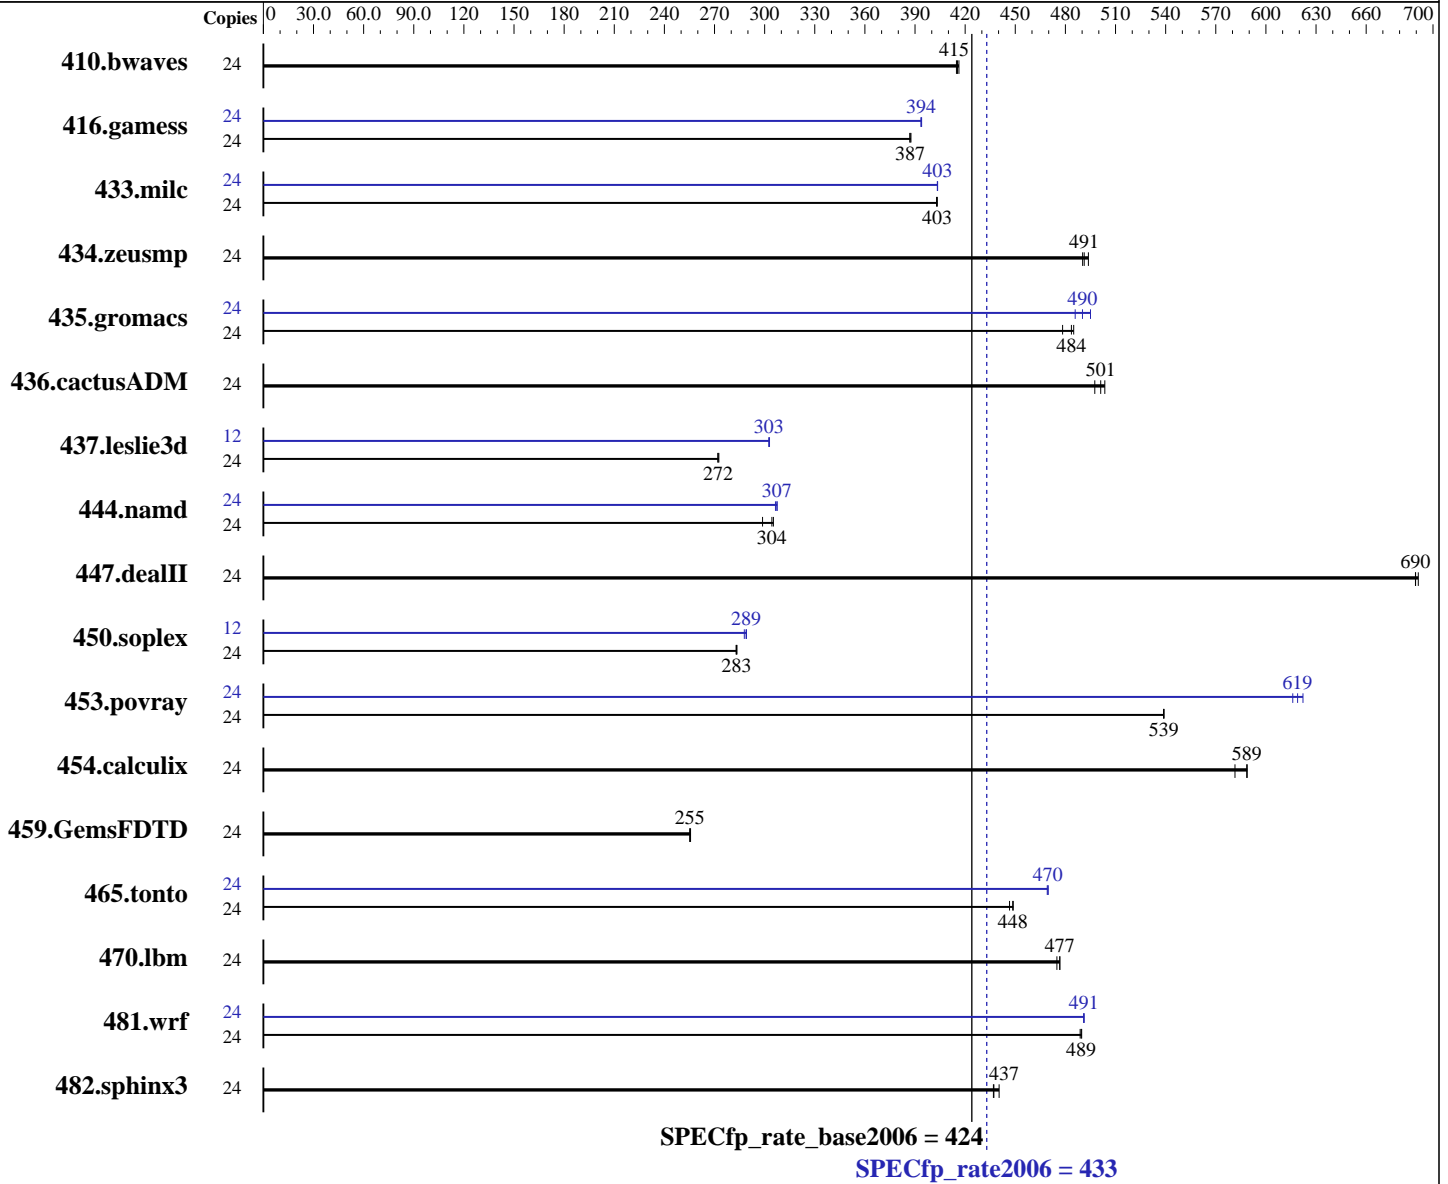

**Hardware**

CPU Name: Intel Xeon E5-2630 v2  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.10 GHz  
 CPU MHz: 2600  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

*Continued on next page*

**Software**

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)  
 Kernel version 2.6.32-358.el6.x86\_64  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;  
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4

*Continued on next page*



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECfp\_rate2006 = 433

ProLiant DL380p Gen8  
(2.60 GHz, Intel Xeon E5-2630 v2)

SPECfp\_rate\_base2006 = 424

CPU2006 license: 3  
Test sponsor: Hewlett-Packard Company  
Tested by: Hewlett-Packard Company

Test date: Sep-2013  
Hardware Availability: Sep-2013  
Software Availability: Sep-2013

L3 Cache: 15 MB I+D on chip per chip  
Other Cache: None  
Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)  
Disk Subsystem: 1 x 300 GB GB 10 K SAS, RAID 0  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	24	786	415	<b>785</b>	<b>415</b>	784	416	24	786	415	<b>785</b>	<b>415</b>	784	416
416.gamess	24	1215	387	<b>1214</b>	<b>387</b>	1213	388	24	1193	394	<b>1194</b>	<b>394</b>	1194	394
433.milc	24	546	403	547	403	<b>546</b>	<b>403</b>	24	546	403	546	404	<b>546</b>	<b>403</b>
434.zeusmp	24	445	490	442	494	<b>445</b>	<b>491</b>	24	445	490	442	494	<b>445</b>	<b>491</b>
435.gromacs	24	353	485	<b>354</b>	<b>484</b>	358	478	24	<b>350</b>	<b>490</b>	346	495	353	486
436.cactusADM	24	576	498	570	504	<b>572</b>	<b>501</b>	24	576	498	570	504	<b>572</b>	<b>501</b>
437.leslie3d	24	829	272	828	273	<b>829</b>	<b>272</b>	12	<b>373</b>	<b>303</b>	373	303	372	303
444.namd	24	<b>632</b>	<b>304</b>	631	305	644	299	24	<b>626</b>	<b>307</b>	628	306	626	308
447.dealII	24	397	691	398	689	<b>398</b>	<b>690</b>	24	397	691	398	689	<b>398</b>	<b>690</b>
450.soplex	24	707	283	706	283	<b>707</b>	<b>283</b>	12	<b>346</b>	<b>289</b>	348	288	346	289
453.povray	24	237	539	<b>237</b>	<b>539</b>	237	539	24	<b>206</b>	<b>619</b>	207	616	205	622
454.calculix	24	336	589	<b>336</b>	<b>589</b>	341	581	24	336	589	<b>336</b>	<b>589</b>	341	581
459.GemsFDTD	24	996	256	998	255	<b>997</b>	<b>255</b>	24	996	256	998	255	<b>997</b>	<b>255</b>
465.tonto	24	529	447	<b>527</b>	<b>448</b>	526	449	24	<b>503</b>	<b>470</b>	503	469	503	470
470.lbm	24	694	475	692	477	<b>692</b>	<b>477</b>	24	694	475	692	477	<b>692</b>	<b>477</b>
481.wrf	24	547	490	<b>548</b>	<b>489</b>	548	489	24	<b>546</b>	<b>491</b>	546	491	546	491
482.sphinx3	24	1071	437	1062	440	<b>1070</b>	<b>437</b>	24	1071	437	1062	440	<b>1070</b>	<b>437</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1 > /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECfp\_rate2006 = 433

ProLiant DL380p Gen8  
(2.60 GHz, Intel Xeon E5-2630 v2)

SPECfp\_rate\_base2006 = 424

**CPU2006 license:** 3  
**Test sponsor:** Hewlett-Packard Company  
**Tested by:** Hewlett-Packard Company

**Test date:** Sep-2013  
**Hardware Availability:** Sep-2013  
**Software Availability:** Sep-2013

### Platform Notes

#### BIOS Configuration:

HP Power Profile set to Maximum Performance  
Energy/Performance Bias is set to Maximum Performance  
Memory Power Savings Mode set to Maximum Performance  
Thermal Configuration set to Maximum Cooling  
Collaborative Power Control set to Disabled  
Dynamic Power Capping Functionality set to Disabled  
Processor Power and Utilization Monitoring set to Disabled  
Memory Refresh Rate set to 1x

Sysinfo program /cpu2006/config/sysinfo.rev6818  
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191  
running on DL380p-Gen8-0SB Sat Sep 28 03:26:35 2013

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

#### From /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) CPU E5-2630 v2 @ 2.60GHz
 2 "physical id"s (chips)
 24 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores     : 6
  siblings      : 12
  physical 0:   : cores 0 1 2 3 4 5
  physical 1:   : cores 0 1 2 3 4 5
cache size     : 15360 KB
```

#### From /proc/meminfo

```
MemTotal:      132119284 kB
HugePages_Total: 0
Hugepagesize:   2048 kB
```

#### From /etc/\*release\* /etc/\*version\*

```
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

#### uname -a:

```
Linux DL380p-Gen8-0SB 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41 EST 2013 x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Sep 27 15:44

#### SPEC is set to: /cpu2006

```
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sda3        ext4      273G  109G  151G  42% /
```

Additional information from dmidecode:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECfp\_rate2006 = 433**

ProLiant DL380p Gen8  
(2.60 GHz, Intel Xeon E5-2630 v2)

**SPECfp\_rate\_base2006 = 424**

**CPU2006 license:** 3

**Test date:** Sep-2013

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Sep-2013

**Tested by:** Hewlett-Packard Company

**Software Availability:** Sep-2013

## Platform Notes (Continued)

BIOS HP P70 09/08/2013

Memory:

16x HP 689911-071 8 GB 1600 MHz 2 rank

8x UNKNOWN NOT AVAILABLE

(End of data from sysinfo program)

Regarding the sysinfo display about the memory installed, the correct amount of memory is 128 GB and the dmidecode description should have one line reading as:

16x HP 689911-071 8 GB 1600 MHz 2 rank

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/cpu2006/libs/32:/cpu2006/libs/64:/cpu2006/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB  
memory using RedHat EL 6.4

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

416.gamess: -DSPEC\_CPU\_LP64

433.milc: -DSPEC\_CPU\_LP64

434.zeusmp: -DSPEC\_CPU\_LP64

435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main

436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main

437.leslie3d: -DSPEC\_CPU\_LP64

444.namd: -DSPEC\_CPU\_LP64

447.dealII: -DSPEC\_CPU\_LP64

450.soplex: -DSPEC\_CPU\_LP64

453.povray: -DSPEC\_CPU\_LP64

454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp\_rate2006 = 433

ProLiant DL380p Gen8  
(2.60 GHz, Intel Xeon E5-2630 v2)

SPECfp\_rate\_base2006 = 424

CPU2006 license: 3  
Test sponsor: Hewlett-Packard Company  
Tested by: Hewlett-Packard Company

Test date: Sep-2013  
Hardware Availability: Sep-2013  
Software Availability: Sep-2013

## Base Portability Flags (Continued)

459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3

C++ benchmarks:  
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3

Fortran benchmarks:  
-xAVX -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:  
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3

## Peak Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks (except as noted below):  
icpc -m64  
450.soplex: icpc -m32

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECfp\_rate2006 = 433**

ProLiant DL380p Gen8  
(2.60 GHz, Intel Xeon E5-2630 v2)

**SPECfp\_rate\_base2006 = 424**

**CPU2006 license:** 3

**Test date:** Sep-2013

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Sep-2013

**Tested by:** Hewlett-Packard Company

**Software Availability:** Sep-2013

## Peak Portability Flags (Continued)

```

433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Peak Optimization Flags

C benchmarks:

```

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -auto-ilp32

```

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

```

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -fno-alias -auto-ilp32

```

447.dealII: basepeak = yes

```

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-malloc-options=3

```

```

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -unroll4 -ansi-alias

```

Fortran benchmarks:

410.bwaves: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECfp\_rate2006 = 433**

ProLiant DL380p Gen8  
(2.60 GHz, Intel Xeon E5-2630 v2)

**SPECfp\_rate\_base2006 = 424**

**CPU2006 license:** 3  
**Test sponsor:** Hewlett-Packard Company  
**Tested by:** Hewlett-Packard Company

**Test date:** Sep-2013  
**Hardware Availability:** Sep-2013  
**Software Availability:** Sep-2013

## Peak Optimization Flags (Continued)

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xAVX -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>  
<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-revB.20131009.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>  
<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-revB.20131009.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 19:01:31 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 22 October 2013.