



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL380p Gen8
(1.80 GHz, Intel Xeon E5-2603 v2)

SPECint_rate2006 = 186

SPECint_rate_base2006 = 179

CPU2006 license: 3


Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Oct-2013

Hardware Availability: Sep-2013

Software Availability: Sep-2013

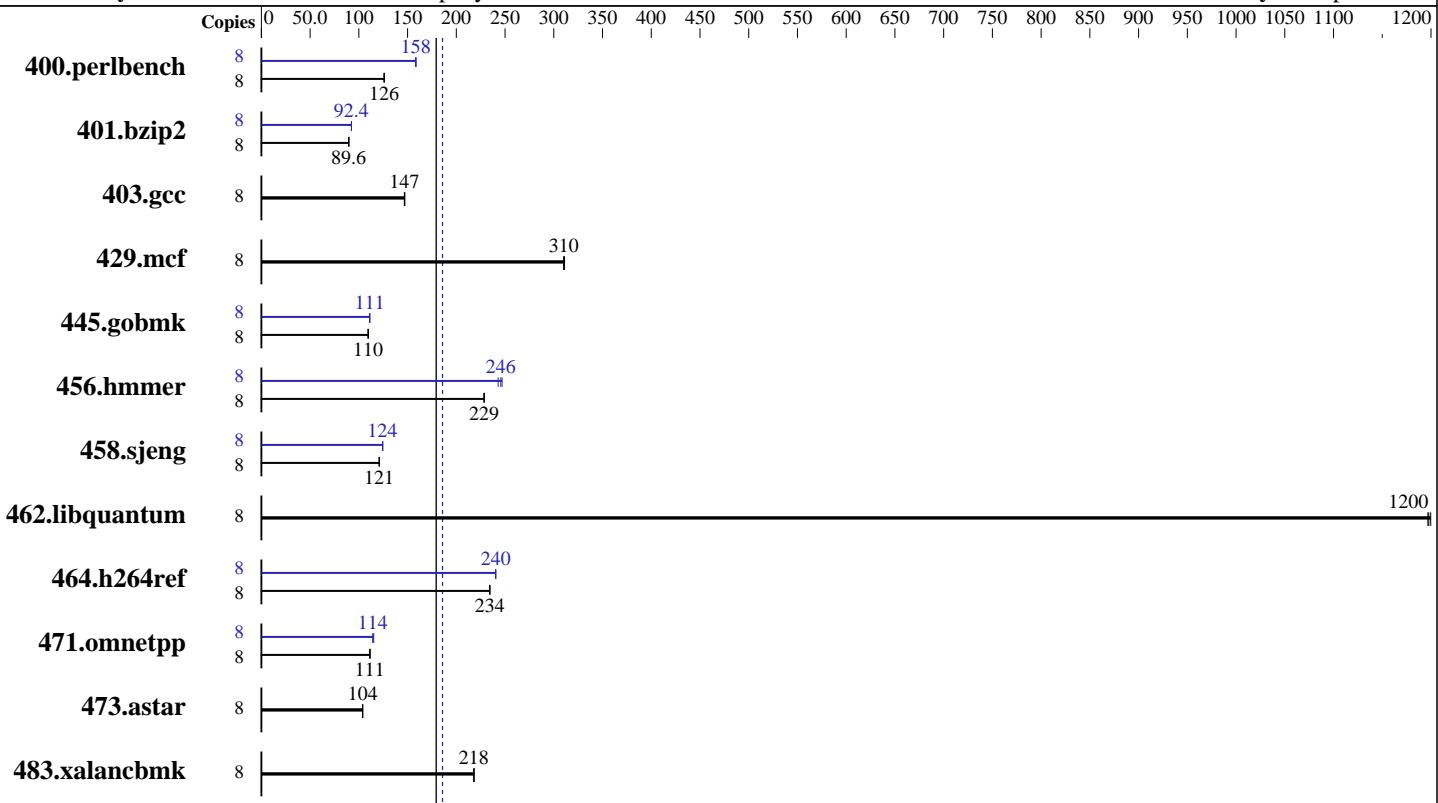

SPECint_rate_base2006 = 179

SPECint_rate2006 = 186

Hardware

CPU Name: Intel Xeon E5-2603 v2
CPU Characteristics:
CPU MHz: 1800
FPU: Integrated
CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
CPU(s) orderable: 1,2 chip
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core
L3 Cache: 10 MB I+D on chip per chip
Other Cache: None
Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC, running at 1333 MHz and CL9)
Disk Subsystem: 1 x 400 GB SAS SSD, RAID 0
Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.4 Kernel 2.6.32-358.el6.x86_64
Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux
Auto Parallel: No
File System: ext4
System State: Run level 3 (multi-user)
Base Pointers: 32-bit
Peak Pointers: 32/64-bit
Other Software: Microquill SmartHeap V10.0



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL380p Gen8
(1.80 GHz, Intel Xeon E5-2603 v2)

SPECint_rate2006 = 186

SPECint_rate_base2006 = 179

CPU2006 license: 3

Test date: Oct-2013

Test sponsor: Hewlett-Packard Company

Hardware Availability: Sep-2013

Tested by: Hewlett-Packard Company

Software Availability: Sep-2013

Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|----------------|--------|------------|------------|------------|------------|------------|-------------|--------|------------|-------------|------------|------------|------------|-------------|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 400.perlbench | 8 | 620 | 126 | 621 | 126 | 620 | 126 | 8 | 493 | 159 | 494 | 158 | 493 | 158 |
| 401.bzip2 | 8 | 859 | 89.9 | 862 | 89.6 | 861 | 89.6 | 8 | 835 | 92.4 | 836 | 92.4 | 835 | 92.4 |
| 403.gcc | 8 | 439 | 147 | 438 | 147 | 438 | 147 | 8 | 439 | 147 | 438 | 147 | 438 | 147 |
| 429.mcf | 8 | 235 | 311 | 235 | 310 | 235 | 310 | 8 | 235 | 311 | 235 | 310 | 235 | 310 |
| 445.gobmk | 8 | 766 | 110 | 767 | 109 | 765 | 110 | 8 | 755 | 111 | 756 | 111 | 755 | 111 |
| 456.hammer | 8 | 327 | 229 | 327 | 229 | 327 | 228 | 8 | 307 | 243 | 302 | 247 | 304 | 246 |
| 458.sjeng | 8 | 800 | 121 | 800 | 121 | 800 | 121 | 8 | 777 | 125 | 778 | 124 | 778 | 124 |
| 462.libquantum | 8 | 138 | 1200 | 139 | 1200 | 138 | 1200 | 8 | 138 | 1200 | 139 | 1200 | 138 | 1200 |
| 464.h264ref | 8 | 756 | 234 | 755 | 234 | 755 | 234 | 8 | 736 | 240 | 736 | 240 | 737 | 240 |
| 471.omnetpp | 8 | 448 | 112 | 449 | 111 | 450 | 111 | 8 | 434 | 115 | 437 | 114 | 437 | 114 |
| 473.astar | 8 | 540 | 104 | 540 | 104 | 542 | 104 | 8 | 540 | 104 | 540 | 104 | 542 | 104 |
| 483.xalancbmk | 8 | 253 | 218 | 253 | 218 | 253 | 218 | 8 | 253 | 218 | 253 | 218 | 253 | 218 |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1 > /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

Used "stop-services" script before the run

Platform Notes

BIOS Configuration:

HP Power Profile set to Maximum Performance

Energy/Performance Bias is set to Maximum Performance

Memory Power Savings Mode set to Maximum Performance

Thermal Configuration set to Maximum Cooling

Collaborative Power Control set to Disabled

Dynamic Power Capping Functionality set to Disabled

Processor Power and Utilization Monitoring set to Disabled

Memory Refresh Rate set to 1x

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL380p Gen8
(1.80 GHz, Intel Xeon E5-2603 v2)

SPECint_rate2006 = 186

SPECint_rate_base2006 = 179

CPU2006 license: 3

Test date: Oct-2013

Test sponsor: Hewlett-Packard Company

Hardware Availability: Sep-2013

Tested by: Hewlett-Packard Company

Software Availability: Sep-2013

Platform Notes (Continued)

```
Sysinfo program /cpu2006/config/sysinfo.rev6818
$Rev: 6818 $ $Date:: 2012-07-17 #$ e86d102572650a6e4d596a3cee98f191
running on DL380p-Gen8-OS9 Sun Oct 27 20:28:02 2013
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E5-2603 v2 @ 1.80GHz
        2 "physical id"s (chips)
        8 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
    cpu cores : 4
    siblings : 4
    physical 0: cores 0 1 2 3
    physical 1: cores 0 1 2 3
    cache size : 10240 KB
```

```
From /proc/meminfo
    MemTotal:       132119284 kB
    HugePages_Total:      0
    Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.4 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux DL380p-Gen8-OS9 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41 EST
2013 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Oct 25 21:44
```

```
SPEC is set to: /cpu2006
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3        ext4  365G  27G  320G  8%  /
```

Additional information from dmidecode:

```
BIOS HP P70 09/08/2013
Memory:
 16x HP 689911-071 8 GB 1333 MHz 2 rank
 8x UNKNOWN NOT AVAILABLE
```

(End of data from sysinfo program)

Regarding the sysinfo display about the memory installed, the correct amount of
Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL380p Gen8
(1.80 GHz, Intel Xeon E5-2603 v2)

SPECint_rate2006 = 186

SPECint_rate_base2006 = 179

CPU2006 license: 3

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Oct-2013

Hardware Availability: Sep-2013

Software Availability: Sep-2013

Platform Notes (Continued)

memory is 128 GB and the dmidecode description should have one line reading as:
16x HP 689911-071 8 GB 1333 MHz 2 rank

General Notes

Environment variables set by runspec before the start of the run:
`LD_LIBRARY_PATH = "/cpu2006/libs/32:/cpu2006/libs/64:/cpu2006/sh"`

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
memory using RedHat EL 6.4

Base Compiler Invocation

C benchmarks:
`icc -m32`

C++ benchmarks:
`icpc -m32`

Base Portability Flags

`400.perlbench: -DSPEC_CPU_LINUX_IA32`
`462.libquantum: -DSPEC_CPU_LINUX`
`483.xalancbmk: -DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3`

C++ benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3`
`-Wl,-z,muldefs -L/sh -lsmartheap`

Base Other Flags

C benchmarks:

`403.gcc: -Dalloca=_alloca`



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL380p Gen8
(1.80 GHz, Intel Xeon E5-2603 v2)

SPECint_rate2006 = 186

SPECint_rate_base2006 = 179

CPU2006 license: 3

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Oct-2013

Hardware Availability: Sep-2013

Software Availability: Sep-2013

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

401.bzip2: -DSPEC_CPU_LP64

456.hmmer: -DSPEC_CPU_LP64

458.sjeng: -DSPEC_CPU_LP64

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: basepeak = yes

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll14 -auto-ilp32

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL380p Gen8
(1.80 GHz, Intel Xeon E5-2603 v2)

SPECint_rate2006 = 186

SPECint_rate_base2006 = 179

CPU2006 license: 3

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Oct-2013

Hardware Availability: Sep-2013

Software Availability: Sep-2013

Peak Optimization Flags (Continued)

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll12 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=__alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>
<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>
<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-revB.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 17:49:03 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 19 November 2013.