



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Sugon

SPECfp<sup>®</sup>\_rate2006 = 431

I620-G10 (Intel Xeon E5-2630 v2, 2.60 GHz)

SPECfp\_rate\_base2006 = 425

CPU2006 license: 9046


Test sponsor: Sugon

Tested by: Sugon

Test date: Nov-2013

Hardware Availability: Nov-2013

Software Availability: Nov-2013

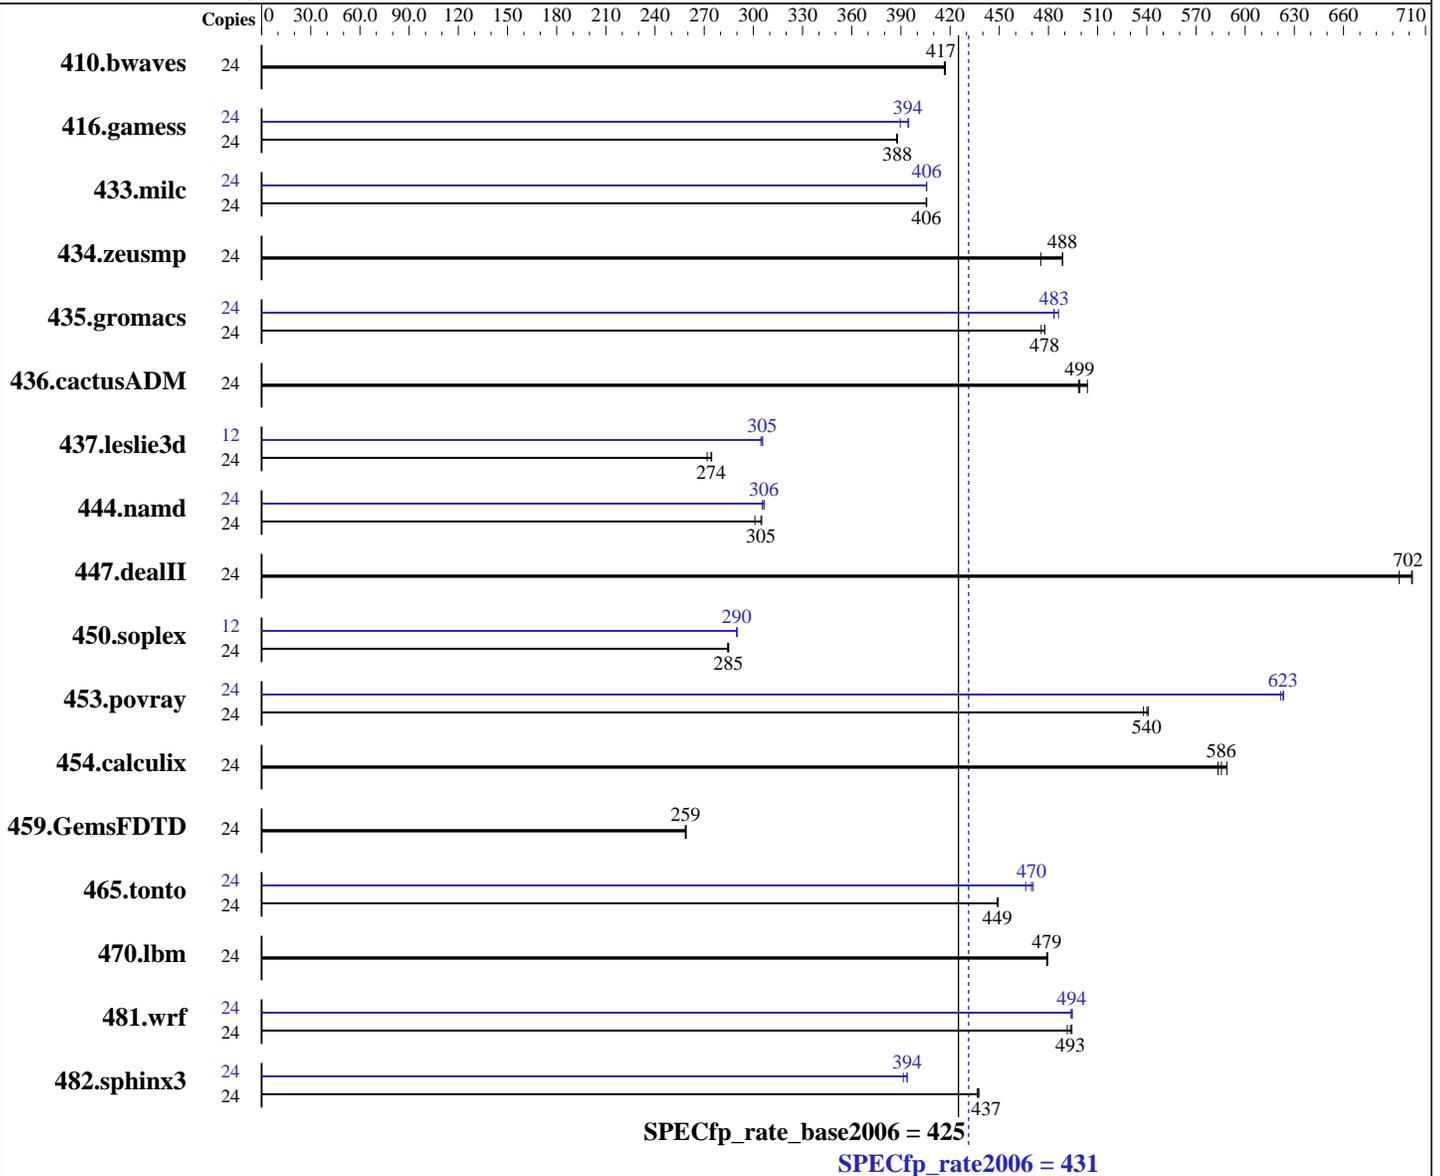

### Hardware

CPU Name: Intel Xeon E5-2630 v2  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.10 GHz  
 CPU MHz: 2600  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 11 SP3 (x86\_64) 3.0.76-0.11-default  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;  
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (Full multiuser with network)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Sugon

SPECfp\_rate2006 = **431**

I620-G10 (Intel Xeon E5-2630 v2, 2.60 GHz)

SPECfp\_rate\_base2006 = **425**

CPU2006 license: 9046

Test date: Nov-2013

Test sponsor: Sugon

Hardware Availability: Nov-2013

Tested by: Sugon

Software Availability: Nov-2013

L3 Cache: 15 MB I+D on chip per chip  
Other Cache: None  
Memory: 256 GB (16 x 16 GB 2Rx4 PC3-14900R-13, ECC)  
Disk Subsystem: 4 x 450 GB SAS 10K RPM, RAID0  
Other Hardware: None

Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	24	782	417	783	416	<b>782</b>	<b>417</b>	24	782	417	783	416	<b>782</b>	<b>417</b>
416.gamess	24	1213	387	<b>1212</b>	<b>388</b>	1211	388	24	1190	395	<b>1192</b>	<b>394</b>	1206	390
433.milc	24	<b>543</b>	<b>406</b>	543	405	543	406	24	543	406	<b>543</b>	<b>406</b>	543	406
434.zeusmp	24	<b>447</b>	<b>488</b>	460	475	447	489	24	<b>447</b>	<b>488</b>	460	475	447	489
435.gromacs	24	359	478	360	476	<b>359</b>	<b>478</b>	24	355	483	<b>354</b>	<b>483</b>	353	486
436.cactusADM	24	<b>575</b>	<b>499</b>	569	504	576	498	24	<b>575</b>	<b>499</b>	569	504	576	498
437.leslie3d	24	830	272	822	275	<b>823</b>	<b>274</b>	12	369	306	<b>369</b>	<b>305</b>	370	305
444.namd	24	<b>632</b>	<b>305</b>	631	305	640	301	24	630	305	<b>628</b>	<b>306</b>	628	307
447.dealII	24	396	694	391	702	<b>391</b>	<b>702</b>	24	396	694	391	702	<b>391</b>	<b>702</b>
450.soplex	24	702	285	<b>703</b>	<b>285</b>	704	284	12	345	290	345	290	<b>345</b>	<b>290</b>
453.povray	24	<b>236</b>	<b>540</b>	236	541	237	538	24	<b>205</b>	<b>623</b>	205	623	205	622
454.calculix	24	339	583	<b>338</b>	<b>586</b>	336	589	24	339	583	<b>338</b>	<b>586</b>	336	589
459.GemsFDTD	24	985	258	983	259	<b>984</b>	<b>259</b>	24	985	258	983	259	<b>984</b>	<b>259</b>
465.tonto	24	526	449	526	449	<b>526</b>	<b>449</b>	24	<b>503</b>	<b>470</b>	507	466	502	471
470.lbm	24	689	479	<b>688</b>	<b>479</b>	688	480	24	689	479	<b>688</b>	<b>479</b>	688	480
481.wrf	24	545	491	542	494	<b>543</b>	<b>493</b>	24	542	495	543	494	<b>542</b>	<b>494</b>
482.sphinx3	24	<b>1070</b>	<b>437</b>	1069	438	1071	437	24	<b>1188</b>	<b>394</b>	1195	391	1188	394

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Configuration:  
Intel Virtualization technology set to disabled  
Power Technology set to performance

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Sugon

SPECfp\_rate2006 = 431

I620-G10 (Intel Xeon E5-2630 v2, 2.60 GHz)

SPECfp\_rate\_base2006 = 425

CPU2006 license: 9046  
Test sponsor: Sugon  
Tested by: Sugon

Test date: Nov-2013  
Hardware Availability: Nov-2013  
Software Availability: Nov-2013

### Platform Notes (Continued)

Turbo boost set to enabled  
DDR Speed set to force 1600  
Sysinfo program /home/spec/config/sysinfo.rev6874  
\$Rev: 6874 \$ \$Date:: 2013-11-20 #\$ 654bd3fcf53b06faef0efe54ed011998  
running on linux-tn7k Sat Nov 30 04:35:19 2013

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2630 v2 @ 2.60GHz
 2 "physical id"s (chips)
24 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 6
  siblings  : 12
  physical 0: cores 0 1 2 3 4 5
  physical 1: cores 0 1 2 3 4 5
cache size : 15360 KB
```

```
From /proc/meminfo
MemTotal:      264518640 kB
HugePages_Total: 0
Hugepagesize:  2048 kB
```

```
/usr/bin/lsc_release -d
SUSE Linux Enterprise Server 11 (x86_64)
```

```
From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 11 (x86_64)
VERSION = 11
PATCHLEVEL = 3
```

```
uname -a:
Linux linux-tn7k 3.0.76-0.11-default #1 SMP Fri Jun 14 08:21:43 UTC 2013
(ccab990) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Nov 29 17:08 last=S
```

```
SPEC is set to: /home/spec
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/md124p1    ext3  784G   91G  654G  13% /home/spec
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sugon

SPECfp\_rate2006 = 431

I620-G10 (Intel Xeon E5-2630 v2, 2.60 GHz)

SPECfp\_rate\_base2006 = 425

CPU2006 license: 9046  
Test sponsor: Sugon  
Tested by: Sugon

Test date: Nov-2013  
Hardware Availability: Nov-2013  
Software Availability: Nov-2013

## Platform Notes (Continued)

BIOS American Megatrends Inc. 3.0a 10/10/2013  
Memory:  
16x Hynix Semiconducto HMT42GR7AFR4C 16 GB 1600 MHz

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/home/spec/libs/32:/home/spec/libs/64:/home/spec/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB  
memory using RedHat EL 6.4  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled  
Filesystem page cache cleared with:  
echo 1> /proc/sys/vm/drop\_caches  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sugon

SPECfp\_rate2006 = 431

I620-G10 (Intel Xeon E5-2630 v2, 2.60 GHz)

SPECfp\_rate\_base2006 = 425

CPU2006 license: 9046

Test date: Nov-2013

Test sponsor: Sugon

Hardware Availability: Nov-2013

Tested by: Sugon

Software Availability: Nov-2013

## Base Portability Flags (Continued)

```

450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Base Optimization Flags

C benchmarks:

```

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

```

C++ benchmarks:

```

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

```

Fortran benchmarks:

```

-xAVX -ipo -O3 -no-prec-div -opt-prefetch

```

Benchmarks using both Fortran and C:

```

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

```

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64
```

```
482.sphinx3: icc -m32
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
450.soplex: icpc -m32
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sugon

SPECfp\_rate2006 = 431

I620-G10 (Intel Xeon E5-2630 v2, 2.60 GHz)

SPECfp\_rate\_base2006 = 425

CPU2006 license: 9046

Test sponsor: Sugon

Tested by: Sugon

Test date: Nov-2013

Hardware Availability: Nov-2013

Software Availability: Nov-2013

## Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

```

## Peak Optimization Flags

C benchmarks:

```

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
         -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
         -prof-use(pass 2) -auto-ilp32

```

```

470.lbm: basepeak = yes

```

```

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -opt-mem-layout-trans=3
            -unroll2

```

C++ benchmarks:

```

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
         -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
         -prof-use(pass 2) -fno-alias -auto-ilp32

```

```

447.dealII: basepeak = yes

```

```

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
         -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
         -prof-use(pass 2) -opt-malloc-options=3

```

```

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
         -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
         -prof-use(pass 2) -unroll4 -ansi-alias

```

Fortran benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Sugon**

**SPECfp\_rate2006 = 431**

**I620-G10 (Intel Xeon E5-2630 v2, 2.60 GHz)**

**SPECfp\_rate\_base2006 = 425**

**CPU2006 license:** 9046

**Test sponsor:** Sugon

**Tested by:** Sugon

**Test date:** Nov-2013

**Hardware Availability:** Nov-2013

**Software Availability:** Nov-2013

## Peak Optimization Flags (Continued)

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xAVX -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/Sugon-Platform-Settings-V1.2-IVB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/Sugon-Platform-Settings-V1.2-IVB.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 16:56:34 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 31 December 2013.