



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation


**SPECint®2006 = 29.1**

IBM System x3650 M4 HD  
(Intel Xeon E5-2603 v2, 1.80 GHz)

**SPECint\_base2006 = 27.9**

**CPU2006 license:** 11  
**Test sponsor:** IBM Corporation  
**Tested by:** IBM Corporation

**Test date:** Dec-2013  
**Hardware Availability:** Dec-2013  
**Software Availability:** Sep-2013

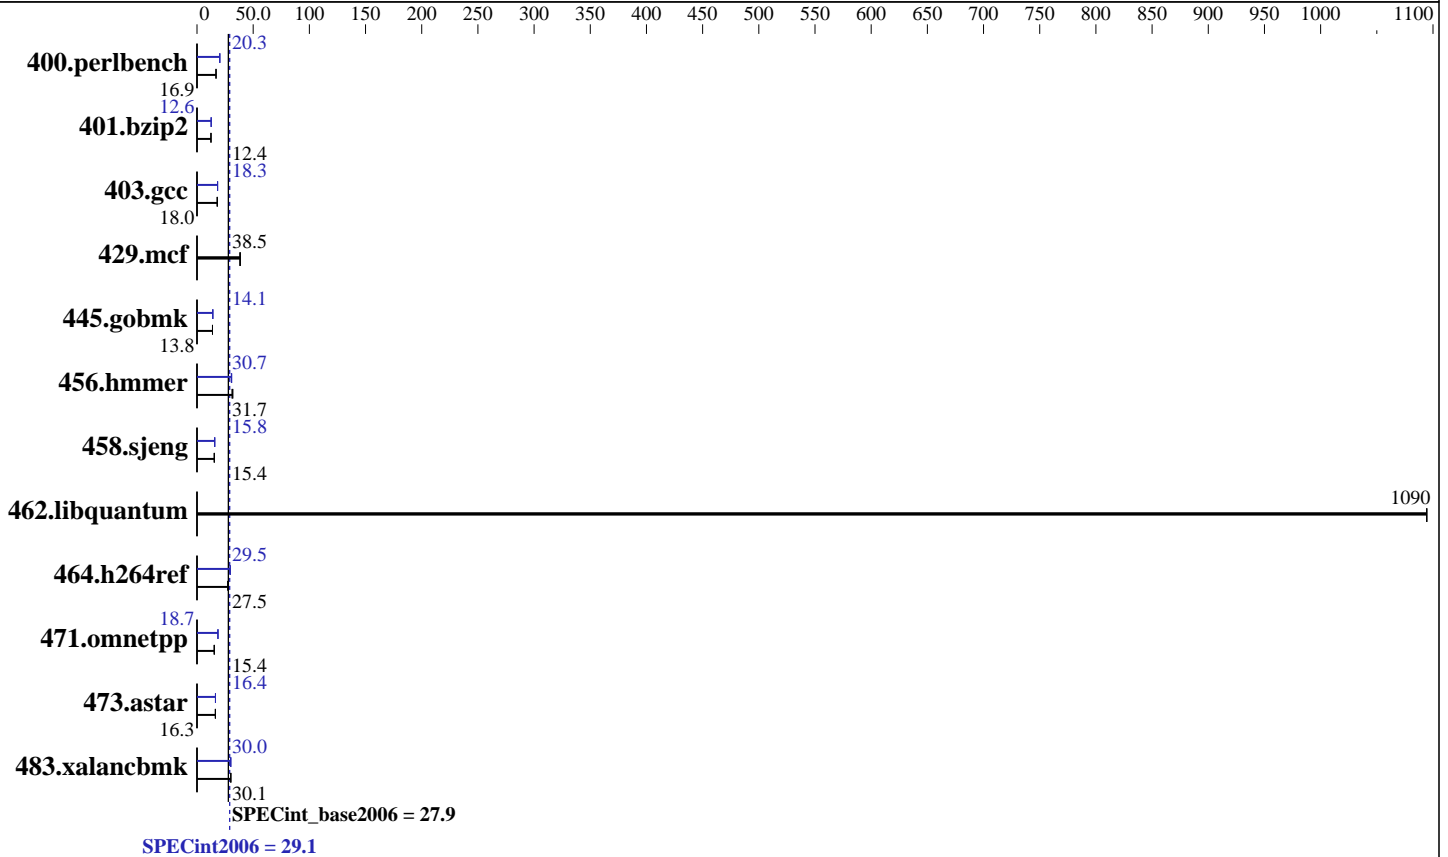

### Hardware

CPU Name: Intel Xeon E5-2603 v2  
 CPU Characteristics:  
 CPU MHz: 1800  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 10 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (16 x 16 GB 2Rx4 PC3-14900R-13, ECC, running at 1333 MHz)  
 Disk Subsystem: 1 x 400 GB SAS SSD, RAID 0  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)  
 2.6.32-358.el6.x86\_64  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

SPECint2006 = 29.1

IBM System x3650 M4 HD  
(Intel Xeon E5-2603 v2, 1.80 GHz)

SPECint\_base2006 = 27.9

CPU2006 license: 11  
Test sponsor: IBM Corporation  
Tested by: IBM Corporation

Test date: Dec-2013  
Hardware Availability: Dec-2013  
Software Availability: Sep-2013

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	576	17.0	577	16.9	<u>577</u>	<u>16.9</u>	<u>482</u>	<u>20.3</u>	481	20.3	482	20.3
401.bzip2	<u>776</u>	<u>12.4</u>	775	12.5	777	12.4	764	12.6	<u>764</u>	<u>12.6</u>	764	12.6
403.gcc	<u>448</u>	<u>18.0</u>	444	18.1	448	18.0	440	18.3	439	18.3	<u>439</u>	<u>18.3</u>
429.mcf	236	38.6	<u>237</u>	<u>38.5</u>	240	38.1	236	38.6	<u>237</u>	<u>38.5</u>	240	38.1
445.gobmk	761	13.8	761	13.8	<u>761</u>	<u>13.8</u>	<u>745</u>	<u>14.1</u>	746	14.1	745	14.1
456.hammer	<u>294</u>	<u>31.7</u>	300	31.1	293	31.9	302	30.9	305	30.5	<u>304</u>	<u>30.7</u>
458.sjeng	<u>786</u>	<u>15.4</u>	786	15.4	787	15.4	768	15.8	767	15.8	<u>767</u>	<u>15.8</u>
462.libquantum	18.9	1090	18.9	1090	<u>18.9</u>	<u>1090</u>	18.9	1090	18.9	1090	<u>18.9</u>	<u>1090</u>
464.h264ref	805	27.5	<u>806</u>	<u>27.5</u>	806	27.5	<u>750</u>	<u>29.5</u>	749	29.6	750	29.5
471.omnetpp	406	15.4	<u>406</u>	<u>15.4</u>	408	15.3	<u>335</u>	<u>18.7</u>	334	18.7	336	18.6
473.astar	430	16.3	<u>430</u>	<u>16.3</u>	427	16.4	<u>427</u>	<u>16.4</u>	426	16.5	428	16.4
483.xalancbmk	230	30.1	<u>229</u>	<u>30.1</u>	229	30.1	<u>230</u>	<u>30.0</u>	230	30.0	230	30.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Zone reclaim mode enabled with:  
echo 1 > /proc/sys/vm/zone\_reclaim\_mode

## Platform Notes

BIOS setting:  
Operating Mode set to Maximum Performance  
Sysinfo program /home/SPECcpu-new/config/sysinfo.rev6818  
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191  
running on x3650M4Plus Sat Dec 7 05:09:32 2013

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) CPU E5-2603 v2 @ 1.80GHz  
2 "physical id"s (chips)  
8 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

SPECint2006 = 29.1

IBM System x3650 M4 HD  
(Intel Xeon E5-2603 v2, 1.80 GHz)

SPECint\_base2006 = 27.9

**CPU2006 license:** 11  
**Test sponsor:** IBM Corporation  
**Tested by:** IBM Corporation

**Test date:** Dec-2013  
**Hardware Availability:** Dec-2013  
**Software Availability:** Sep-2013

### Platform Notes (Continued)

```
cpu cores : 4
siblings  : 4
physical 0: cores 0 1 2 3
physical 1: cores 0 1 2 3
cache size : 10240 KB
```

```
From /proc/meminfo
MemTotal:      264655816 kB
HugePages_Total:    0
Hugepagesize:    2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.4 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux x3650M4Plus 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41 EST 2013
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Dec 4 12:12
```

```
SPEC is set to: /home/SPECcpu-new
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/mapper/vg_x3650m4plus-lv_home
                ext4      309G  217G   76G   75% /home
```

```
Additional information from dmidecode:
BIOS IBM -[TESTBUILD-1.50]- 08/09/2013
Memory:
8x Not Specified Not Specified
16x Samsung M393B2G70QH0-CMA 16 GB 1333 MHz 2 rank
```

(End of data from sysinfo program)  
"Not Specified" memory information from dmidecode indicates unused DIMM slots.  
The BIOS IBM -[TESTBUILD-1.50] is equivalent to production version [VVE134TUS-1.51]

### General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/home/SPECcpu-new/libs/32:/home/SPECcpu-new/libs/64:/home/SPECcpu-new/sh"  
OMP\_NUM\_THREADS = "8"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB  
memory using RedHat EL 6.4  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled  
runspec command invoked through numactl i.e.:

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 29.1

IBM System x3650 M4 HD  
(Intel Xeon E5-2603 v2, 1.80 GHz)

SPECint\_base2006 = 27.9

CPU2006 license: 11

Test date: Dec-2013

Test sponsor: IBM Corporation

Hardware Availability: Dec-2013

Tested by: IBM Corporation

Software Availability: Sep-2013

## General Notes (Continued)

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
403.gcc: -DSPEC\_CPU\_LP64  
429.mcf: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
471.omnetpp: -DSPEC\_CPU\_LP64  
473.astar: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -Wl,-z,muldefs  
-L/sh -lsmartheap64

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

**SPECint2006 = 29.1**

IBM System x3650 M4 HD  
(Intel Xeon E5-2603 v2, 1.80 GHz)

**SPECint\_base2006 = 27.9**

**CPU2006 license:** 11  
**Test sponsor:** IBM Corporation  
**Tested by:** IBM Corporation

**Test date:** Dec-2013  
**Hardware Availability:** Dec-2013  
**Software Availability:** Sep-2013

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

400.perlbench: icc -m32

445.gobmk: icc -m32

464.h264ref: icc -m32

C++ benchmarks (except as noted below):

icpc -m32

473.astar: icpc -m64

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -DSPEC\_CPU\_LP64  
403.gcc: -DSPEC\_CPU\_LP64  
429.mcf: -DSPEC\_CPU\_LP64  
456.hmmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
473.astar: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch  
-ansi-alias

401.bzip2: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div -prof-use(pass 2) -auto-ilp32 -opt-prefetch  
-ansi-alias

403.gcc: -xAVX -ipo -O3 -no-prec-div -inline-calloc  
-opt-malloc-options=3 -auto-ilp32

429.mcf: basepeak = yes

445.gobmk: -xAVX(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

**SPECint2006 = 29.1**

IBM System x3650 M4 HD  
(Intel Xeon E5-2603 v2, 1.80 GHz)

**SPECint\_base2006 = 27.9**

**CPU2006 license:** 11  
**Test sponsor:** IBM Corporation  
**Tested by:** IBM Corporation

**Test date:** Dec-2013  
**Hardware Availability:** Dec-2013  
**Software Availability:** Sep-2013

## Peak Optimization Flags (Continued)

456.hmmcr: -xAVX -ipo -O3 -no-prec-div -unroll2 -auto-ilp32  
-ansi-alias

458.sjeng: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4

462.libquantum: basepeak = yes

464.h264ref: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-ansi-alias

C++ benchmarks:

471.omnetpp: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2)  
-opt-ra-region-strategy=block -ansi-alias  
-Wl,-z,muldefs -L/sh -lsmarheap

473.astar: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-Wl,-z,muldefs -L/sh -lsmarheap64

483.xalancbmk: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias  
-Wl,-z,muldefs -L/sh -lsmarheap

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>  
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-A.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>  
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-A.xml>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

**SPECint2006 = 29.1**

IBM System x3650 M4 HD  
(Intel Xeon E5-2603 v2, 1.80 GHz)

**SPECint\_base2006 = 27.9**

**CPU2006 license:** 11  
**Test sponsor:** IBM Corporation  
**Tested by:** IBM Corporation

**Test date:** Dec-2013  
**Hardware Availability:** Dec-2013  
**Software Availability:** Sep-2013

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 16:56:58 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 31 December 2013.