



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M3 (Intel Xeon E5-2695 v2, 2.40 GHz)

**SPECfp®2006 = 56.8**

**SPECfp\_base2006 = 52.7**

**CPU2006 license:** 9019


**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test date:** Dec-2013

**Hardware Availability:** Dec-2013

**Software Availability:** Sep-2013

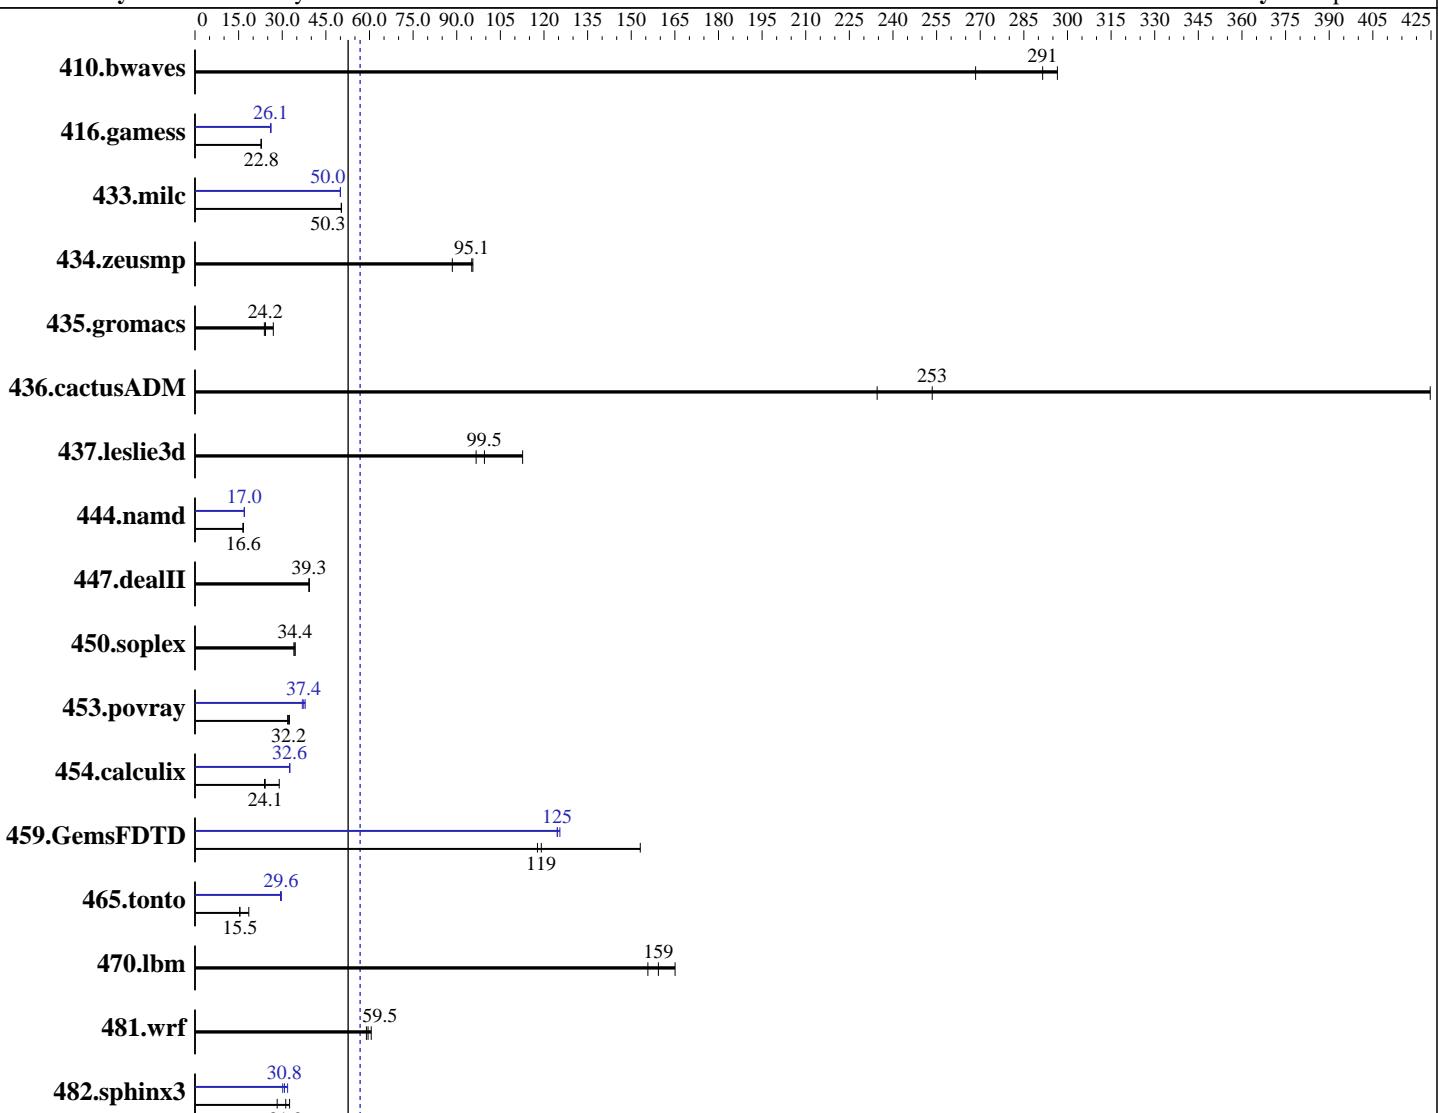

**SPECfp\_base2006 = 52.7**

**SPECfp2006 = 56.8**

### Hardware

CPU Name: Intel Xeon E5-2695 v2  
CPU Characteristics: Intel Turbo Boost Technology up to 3.20 GHz  
CPU MHz: 2400  
FPU: Integrated  
CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip, 2 threads/core  
CPU(s) orderable: 1,2 chip  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core

### Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)  
Compiler: 2.6.32-358.el6.x86\_64  
C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;  
Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux  
Auto Parallel: Yes  
File System: ext4

*Continued on next page*

*Continued on next page*



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M3 (Intel Xeon E5-2695 v2, 2.40 GHz)

**SPECfp2006 = 56.8**

**SPECfp\_base2006 = 52.7**

**CPU2006 license:** 9019

**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test date:** Dec-2013

**Hardware Availability:** Dec-2013

**Software Availability:** Sep-2013

L3 Cache: 30 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (16 x 16 GB 2Rx4 PC3-14900R-13, ECC)  
 Disk Subsystem: 1 X 300 GB 15000 RPM SAS  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio										
410.bwaves	50.6	268	<b>46.6</b>	<b>291</b>	45.8	297	50.6	268	<b>46.6</b>	<b>291</b>	45.8	297
416.gamess	<b>860</b>	<b>22.8</b>	858	22.8	861	22.7	<b>751</b>	<b>26.1</b>	753	26.0	751	26.1
433.milc	182	50.4	<b>182</b>	<b>50.3</b>	182	50.3	184	50.0	184	50.0	<b>184</b>	<b>50.0</b>
434.zeusmp	103	88.5	<b>95.6</b>	<b>95.1</b>	95.2	95.5	103	88.5	<b>95.6</b>	<b>95.1</b>	95.2	95.5
435.gromacs	299	23.8	265	26.9	<b>295</b>	<b>24.2</b>	299	23.8	265	26.9	<b>295</b>	<b>24.2</b>
436.cactusADM	50.9	235	28.1	425	<b>47.1</b>	<b>253</b>	50.9	235	28.1	425	<b>47.1</b>	<b>253</b>
437.leslie3d	97.2	96.7	<b>94.4</b>	<b>99.5</b>	83.4	113	97.2	96.7	<b>94.4</b>	<b>99.5</b>	83.4	113
444.namd	484	16.6	<b>484</b>	<b>16.6</b>	484	16.6	<b>473</b>	<b>17.0</b>	473	17.0	472	17.0
447.dealII	291	39.3	292	39.2	<b>291</b>	<b>39.3</b>	291	39.3	292	39.2	<b>291</b>	<b>39.3</b>
450.soplex	<b>243</b>	<b>34.4</b>	242	34.4	245	34.0	<b>243</b>	<b>34.4</b>	242	34.4	<b>245</b>	34.0
453.povray	<b>165</b>	<b>32.2</b>	167	31.8	164	32.5	<b>142</b>	<b>37.4</b>	144	36.9	140	37.9
454.calculix	<b>342</b>	<b>24.1</b>	345	23.9	285	29.0	<b>253</b>	<b>32.6</b>	254	32.5	253	32.6
459.GemsFDTD	<b>89.1</b>	<b>119</b>	90.1	118	69.3	153	<b>85.2</b>	<b>125</b>	84.6	125	85.2	125
465.tonto	641	15.4	532	18.5	<b>636</b>	<b>15.5</b>	332	29.7	335	29.4	<b>332</b>	<b>29.6</b>
470.lbm	88.2	156	<b>86.2</b>	<b>159</b>	83.2	165	88.2	156	<b>86.2</b>	<b>159</b>	83.2	165
481.wrf	190	58.9	<b>188</b>	<b>59.5</b>	184	60.6	190	58.9	<b>188</b>	<b>59.5</b>	184	60.6
482.sphinx3	690	28.3	<b>625</b>	<b>31.2</b>	599	32.5	<b>612</b>	<b>31.8</b>	646	30.2	<b>634</b>	<b>30.8</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

### BIOS Settings:

Intel HT Technology = Enabled

CPU performance set to HPC

Power Technology set to Custom

CPU Power State C6 set to Enabled

CPU Power State C1 Enhanced set to Disabled

Energy Performance policy set to Performance

Memory RAS configuration set to Maximum Performance

DRAM Clock Throttling Set to Performance

LV DDR Mode set to Performance-mode

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M3 (Intel Xeon E5-2695 v2, 2.40 GHz)

**SPECfp2006 = 56.8**

**SPECfp\_base2006 = 52.7**

**CPU2006 license:** 9019

**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test date:** Dec-2013

**Hardware Availability:** Dec-2013

**Software Availability:** Sep-2013

## Platform Notes (Continued)

DRAM Refresh Rate Set to 1x

Sysinfo program /opt/cpu2006-1.2/config/sysinfo.rev6818  
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\\$ e86d102572650a6e4d596a3cee98f191  
running on rhel6.4-speed Fri Dec 20 02:50:02 2013

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2695 v2 @ 2.40GHz
        2 "physical id"s (chips)
        48 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 12
siblings : 24
physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13
physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13
cache size : 30720 KB
```

```
From /proc/meminfo
MemTotal:      264455736 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.4 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux rhel6.4-speed 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41 EST 2013
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Dec 20 02:46
```

```
SPEC is set to: /opt/cpu2006-1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdb1        ext4  275G   98G  163G  38%  /
```

Additional information from dmidecode:

```
BIOS Cisco Systems, Inc. C220M3.1.5.2.27.071120132232 07/11/2013
Memory:
 16x 0xAD00 HMT42GR7AFR4C-RD 16 GB 1866 MHz 2 rank
```

(End of data from sysinfo program)



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems	<b>SPECfp2006 =</b>	<b>56.8</b>
Cisco UCS C220 M3 (Intel Xeon E5-2695 v2, 2.40 GHz)	<b>SPECfp_base2006 =</b>	<b>52.7</b>
<b>CPU2006 license:</b> 9019	<b>Test date:</b>	Dec-2013
<b>Test sponsor:</b> Cisco Systems	<b>Hardware Availability:</b>	Dec-2013
<b>Tested by:</b> Cisco Systems	<b>Software Availability:</b>	Sep-2013

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/opt/cpu2006-1.2/libs/32:/opt/cpu2006-1.2/libs/64:/opt/cpu2006-1.2/sh"  
OMP\_NUM\_THREADS = "48"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>
```

## Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

## Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
    447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
    465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M3 (Intel Xeon E5-2695 v2, 2.40 GHz)

**SPECfp2006 = 56.8**

**SPECfp\_base2006 = 52.7**

**CPU2006 license:** 9019

**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test date:** Dec-2013

**Hardware Availability:** Dec-2013

**Software Availability:** Sep-2013

## Base Optimization Flags

C benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias
```

C++ benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias
```

Fortran benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xSSE4.2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32  
-ansi-alias
```

```
470.lbm: basepeak = yes
```

```
482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -unroll12 -ansi-alias  
-parallel
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

<b>Cisco Systems</b>	<b>SPECfp2006 =</b>	<b>56.8</b>
Cisco UCS C220 M3 (Intel Xeon E5-2695 v2, 2.40 GHz)	<b>SPECfp_base2006 =</b>	<b>52.7</b>
<b>CPU2006 license:</b> 9019	<b>Test date:</b>	Dec-2013
<b>Test sponsor:</b> Cisco Systems	<b>Hardware Availability:</b>	Dec-2013
<b>Tested by:</b> Cisco Systems	<b>Software Availability:</b>	Sep-2013

## Peak Optimization Flags (Continued)

C++ benchmarks:

```
444.namd: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
           -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
            -no-prec-div(pass 2) -prof-use(pass 2) -unroll14 -ansi-alias
```

Fortran benchmarks:

```
410.bwaves: basepeak = yes

416.gamess: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
             -no-prec-div(pass 2) -prof-use(pass 2) -unroll12
             -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
               -no-prec-div(pass 2) -prof-use(pass 2) -unroll12
               -inline-level=0 -opt-prefetch -parallel

465.tonto: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
            -no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc
            -opt-malloc-options=3 -auto -unroll14
```

Benchmarks using both Fortran and C:

```
435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xsse4.2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>  
<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.20130717.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>  
<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.20130717.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M3 (Intel Xeon E5-2695 v2, 2.40 GHz)

**SPECfp2006 = 56.8**

**SPECfp\_base2006 = 52.7**

**CPU2006 license:** 9019

**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test date:** Dec-2013

**Hardware Availability:** Dec-2013

**Software Availability:** Sep-2013

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 21:20:58 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 28 January 2014.