



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL560 Gen8  
(2.20 GHz, Intel Xeon E5-4607)

**SPECint\_rate2006 = 354**

**SPECint\_rate\_base2006 = 342**

CPU2006 license: 3


Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

**Test date:** Jan-2014

**Hardware Availability:** Dec-2013

**Software Availability:** Oct-2013

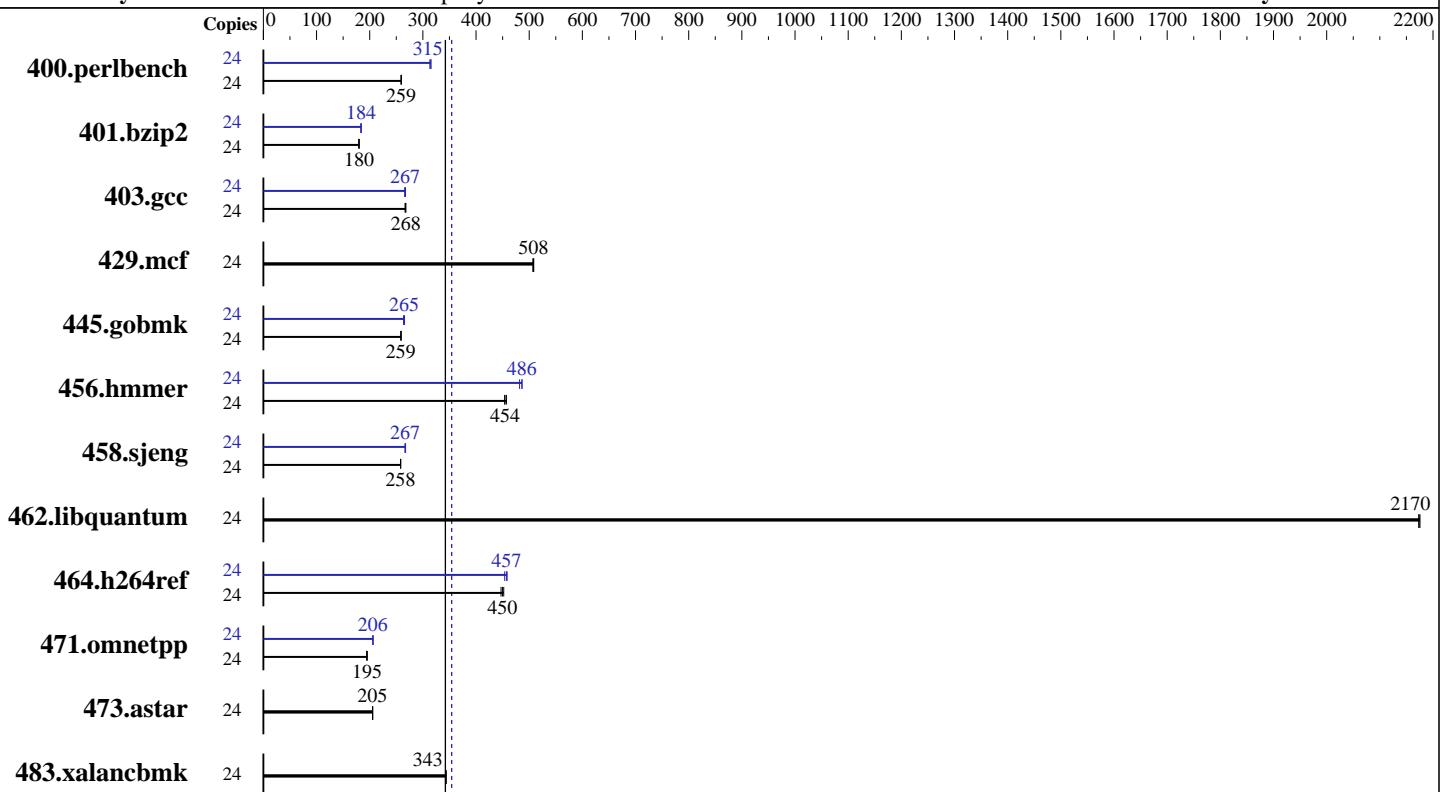

**SPECint\_rate\_base2006 = 342**

**SPECint\_rate2006 = 354**

### Hardware

|                      |  |
|----------------------|--|
| CPU Name:            | Intel Xeon E5-4607   |
| CPU Characteristics: |  |
| CPU MHz:             | 2200   |
| FPU:                 | Integrated   |
| CPU(s) enabled:      | 12 cores, 2 chips, 6 cores/chip, 2 threads/core                          |
| CPU(s) orderable:    | 1,2,4 chips  |
| Primary Cache:       | 32 KB I + 32 KB D on chip per core                                       |
| Secondary Cache:     | 256 KB I+D on chip per core  |
| L3 Cache:            | 12 MB I+D on chip per chip   |
| Other Cache:         | None   |
| Memory:              | 256 GB (16 x 16 GB 2Rx4 PC3-12800R-11, ECC, running at 1067 MHz and CL7) |
| Disk Subsystem:      | 5 x 300 GB 15 K SAS, RAID 5  |
| Other Hardware:      | None   |

### Software

|                   |   |
|-------------------|---|
| Operating System: | Red Hat Enterprise Linux Server release 6.4, (Santiago)<br>Kernel 2.6.32-358.el6.x86_64 |
| Compiler:         | C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux                              |
| Auto Parallel:    | No  |
| File System:      | ext4  |
| System State:     | Run level 3 (multi-user)  |
| Base Pointers:    | 32-bit  |
| Peak Pointers:    | 32/64-bit   |
| Other Software:   | Microquill SmartHeap V10.0  |



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL560 Gen8  
(2.20 GHz, Intel Xeon E5-4607)

**SPECint\_rate2006 = 354**

**SPECint\_rate\_base2006 = 342**

CPU2006 license: 3

Test date: Jan-2014

Test sponsor: Hewlett-Packard Company

Hardware Availability: Dec-2013

Tested by: Hewlett-Packard Company

Software Availability: Oct-2013

## Results Table

| Benchmark      | Base   |             |             |             |            |            |            | Peak   |             |             |             |            |             |            |
|----------------|--------|-------------|-------------|-------------|------------|------------|------------|--------|-------------|-------------|-------------|------------|-------------|------------|
|                | Copies | Seconds     | Ratio       | Seconds     | Ratio      | Seconds    | Ratio      | Copies | Seconds     | Ratio       | Seconds     | Ratio      | Seconds     | Ratio      |
| 400.perlbench  | 24     | <b>905</b>  | <b>259</b>  | 905         | 259        | 903        | 260        | 24     | 744         | 315         | 749         | 313        | <b>744</b>  | <b>315</b> |
| 401.bzip2      | 24     | 1285        | 180         | <b>1287</b> | <b>180</b> | 1291       | 179        | 24     | 1259        | 184         | 1263        | 183        | <b>1260</b> | <b>184</b> |
| 403.gcc        | 24     | 725         | 266         | 721         | 268        | <b>722</b> | <b>268</b> | 24     | 723         | 267         | <b>724</b>  | <b>267</b> | 727         | 266        |
| 429.mcf        | 24     | <b>431</b>  | <b>508</b>  | 432         | 507        | 430        | 508        | 24     | <b>431</b>  | <b>508</b>  | 432         | 507        | 430         | 508        |
| 445.gobmk      | 24     | 971         | 259         | 974         | 259        | <b>973</b> | <b>259</b> | 24     | 948         | 266         | <b>952</b>  | <b>265</b> | 955         | 264        |
| 456.hammer     | 24     | <b>493</b>  | <b>454</b>  | 490         | 457        | 493        | 454        | 24     | 460         | 487         | <b>461</b>  | <b>486</b> | 465         | 482        |
| 458.sjeng      | 24     | 1125        | 258         | <b>1125</b> | <b>258</b> | 1125       | 258        | 24     | 1086        | 267         | <b>1089</b> | <b>267</b> | 1089        | 267        |
| 462.libquantum | 24     | <b>229</b>  | <b>2170</b> | 229         | 2170       | 229        | 2180       | 24     | <b>229</b>  | <b>2170</b> | 229         | 2170       | 229         | 2180       |
| 464.h264ref    | 24     | <b>1181</b> | <b>450</b>  | 1188        | 447        | 1175       | 452        | 24     | <b>1162</b> | <b>457</b>  | 1170        | 454        | 1158        | 458        |
| 471.omnetpp    | 24     | 768         | 195         | 772         | 194        | <b>769</b> | <b>195</b> | 24     | 729         | 206         | 727         | 206        | <b>728</b>  | <b>206</b> |
| 473.astar      | 24     | 820         | 206         | <b>820</b>  | <b>205</b> | 820        | 205        | 24     | 820         | 206         | <b>820</b>  | <b>205</b> | 820         | 205        |
| 483.xalancbmk  | 24     | 482         | 343         | 482         | 344        | <b>482</b> | <b>343</b> | 24     | 482         | 343         | 482         | 344        | <b>482</b>  | <b>343</b> |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1 > /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

## Platform Notes

BIOS Configuration:

HP Power Profile set to Maximum Performance

Memory Power Savings Mode set to Disabled

Thermal Configuration set to Maximum Cooling

Processor Power and Utilization Monitoring set to Disabled

Sysinfo program /home/cpu/config/sysinfo.rev6818

\$Rev: 6818 \$ \$Date::: 2012-07-17 #\\$ e86d102572650a6e4d596a3cee98f191

running on PL67 Wed Jan 22 07:38:17 2014

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL560 Gen8  
(2.20 GHz, Intel Xeon E5-4607)

**SPECint\_rate2006 = 354**

**SPECint\_rate\_base2006 = 342**

**CPU2006 license:** 3

**Test date:** Jan-2014

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Dec-2013

**Tested by:** Hewlett-Packard Company

**Software Availability:** Oct-2013

## Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E5-4607 0 @ 2.20GHz
        2 "physical id"s (chips)
        24 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
    cpu cores : 6
    siblings   : 12
    physical 0: cores 0 1 2 3 4 5
    physical 1: cores 0 1 2 3 4 5
    cache size : 12288 KB
```

```
From /proc/meminfo
    MemTotal:      264485764 kB
    HugePages_Total:       0
    Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux PL67 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41 EST 2013 x86_64
x86_64 x86_64 GNU/Linux
```

run-level 3 Jan 21 05:45

```
SPEC is set to: /home/cpu
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/vg_pl67-lv_home
                    ext4   1.1T  6.3G  987G   1%  /home
```

Additional information from dmidecode:

```
BIOS HP P77 12/20/2013
Memory:
16x HP 672612-081 16 GB 1067 MHz 2 rank
32x UNKNOWN NOT AVAILABLE
```

(End of data from sysinfo program)

Regarding the sysinfo display about the memory installed, the correct amount of
memory is 256 GB and the dmidecode description should have one line reading as:
16x HP 672612-081 16 GB 1067 MHz 2 rank



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL560 Gen8  
(2.20 GHz, Intel Xeon E5-4607)

**SPECint\_rate2006 = 354**

**SPECint\_rate\_base2006 = 342**

CPU2006 license: 3

Test date: Jan-2014

Test sponsor: Hewlett-Packard Company

Hardware Availability: Dec-2013

Tested by: Hewlett-Packard Company

Software Availability: Oct-2013

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu/libs/32:/home/cpu/libs/64:/home/cpu/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB  
memory using RedHat EL 6.4

## Base Compiler Invocation

C benchmarks:

icc -m32

C++ benchmarks:

icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
-Wl,-z,muldefs -L/sh -lsmartheap

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL560 Gen8  
(2.20 GHz, Intel Xeon E5-4607)

**SPECint\_rate2006 = 354**

**SPECint\_rate\_base2006 = 342**

CPU2006 license: 3

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Jan-2014

Hardware Availability: Dec-2013

Software Availability: Oct-2013

## Peak Compiler Invocation (Continued)

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

401.bzip2: -DSPEC\_CPU\_LP64

456.hmmer: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll14 -auto-ilp32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL560 Gen8  
(2.20 GHz, Intel Xeon E5-4607)

**SPECint\_rate2006 = 354**

**SPECint\_rate\_base2006 = 342**

**CPU2006 license:** 3

**Test sponsor:** Hewlett-Packard Company

**Tested by:** Hewlett-Packard Company

**Test date:** Jan-2014

**Hardware Availability:** Dec-2013

**Software Availability:** Oct-2013

## Peak Optimization Flags (Continued)

462.libquantum: basepeak = yes

```
464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
              -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
              -unroll2 -ansi-alias
```

C++ benchmarks:

```
471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
              -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
              -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
              -L/sh -lsmartheap
```

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-revB.20131009.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-revB.20131009.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 21:55:37 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 11 March 2014.