



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Sugon

SPECint®\_rate2006 = **682**

I620-G15 (Intel Xeon E5-2650 v2, 2.60 GHz)

SPECint\_rate\_base2006 = **657**

CPU2006 license: 9046


Test date: Jan-2014

Test sponsor: Sugon

Hardware Availability: Dec-2013

Tested by: Sugon

Software Availability: Jan-2014

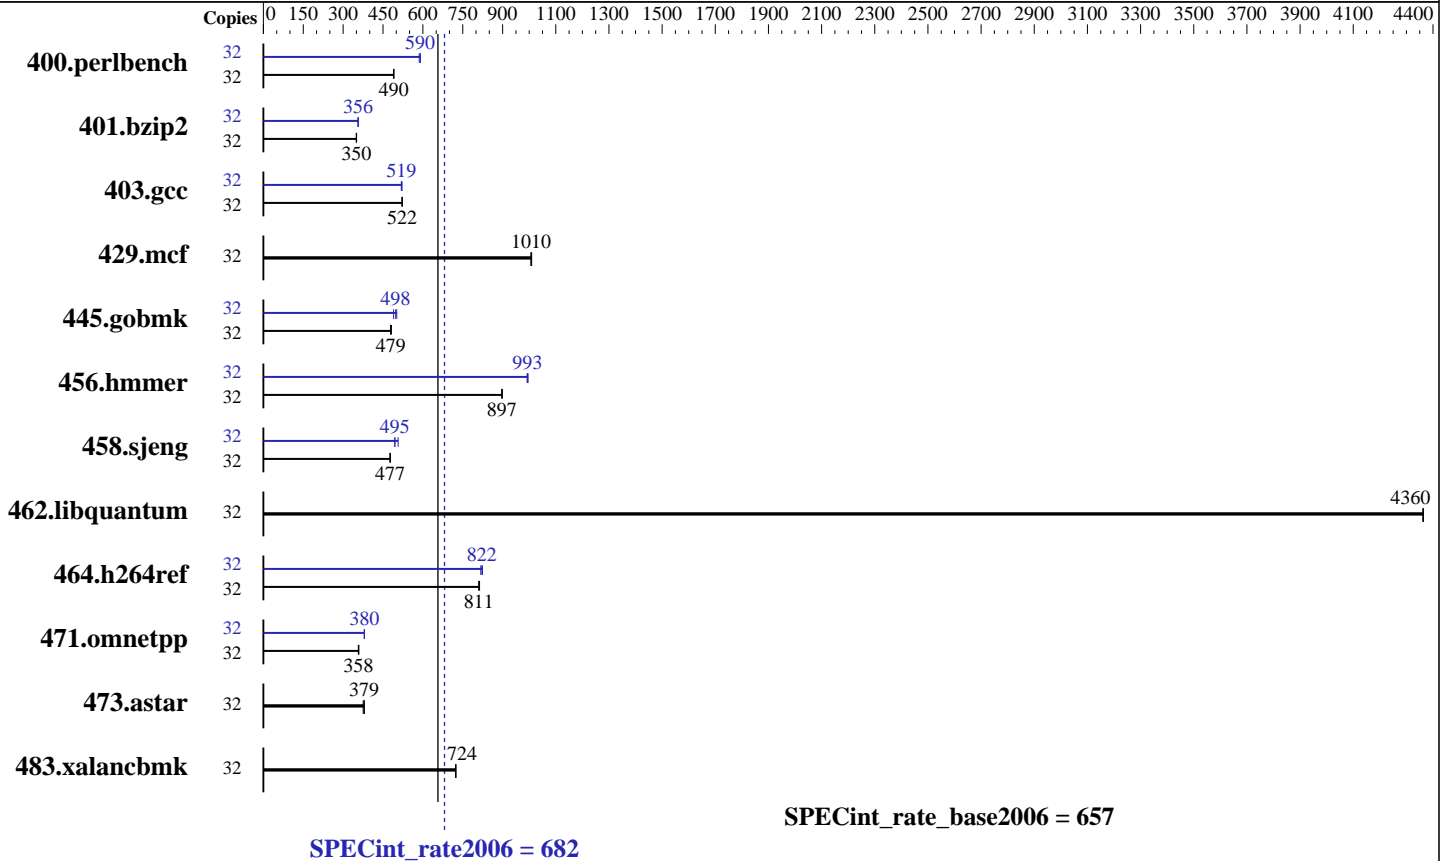

### Hardware

CPU Name: Intel Xeon E5-2650 v2  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.40 GHz  
 CPU MHz: 2600  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 20 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (16 x 16 GB 2Rx4 PC3-14900R-13, ECC)  
 Disk Subsystem: 1 X 2 TB SATA 7200 RPM, RAID 0  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)  
 2.6.32-358.el6.x86\_64  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (Full multiuser with network)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Sugon

SPECint\_rate2006 = 682

I620-G15 (Intel Xeon E5-2650 v2, 2.60 GHz)

SPECint\_rate\_base2006 = 657

CPU2006 license: 9046  
Test sponsor: Sugon  
Tested by: Sugon

Test date: Jan-2014  
Hardware Availability: Dec-2013  
Software Availability: Jan-2014

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	32	<b>637</b>	<b>490</b>	637	491	638	490	32	533	586	<b>530</b>	<b>590</b>	529	591
401.bzip2	32	881	351	883	350	<b>883</b>	<b>350</b>	32	867	356	<b>866</b>	<b>356</b>	866	357
403.gcc	32	<b>493</b>	<b>522</b>	493	523	494	522	32	496	519	494	522	<b>496</b>	<b>519</b>
429.mcf	32	289	1010	290	1010	<b>290</b>	<b>1010</b>	32	289	1010	290	1010	<b>290</b>	<b>1010</b>
445.gobmk	32	697	482	701	479	<b>701</b>	<b>479</b>	32	<b>675</b>	<b>498</b>	669	502	685	490
456.hammer	32	333	897	332	899	<b>333</b>	<b>897</b>	32	301	992	300	996	<b>301</b>	<b>993</b>
458.sjeng	32	<b>812</b>	<b>477</b>	812	477	812	477	32	783	495	764	507	<b>783</b>	<b>495</b>
462.libquantum	32	152	4360	<b>152</b>	<b>4360</b>	152	4360	32	152	4360	<b>152</b>	<b>4360</b>	152	4360
464.h264ref	32	<b>873</b>	<b>811</b>	874	810	871	813	32	866	818	<b>862</b>	<b>822</b>	859	824
471.omnetpp	32	557	359	560	357	<b>558</b>	<b>358</b>	32	527	380	<b>526</b>	<b>380</b>	526	380
473.astar	32	598	375	592	380	<b>593</b>	<b>379</b>	32	598	375	592	380	<b>593</b>	<b>379</b>
483.xalancbmk	32	<b>305</b>	<b>724</b>	305	724	305	723	32	<b>305</b>	<b>724</b>	305	724	305	723

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Configuration:  
Intel Virtualization technology set to disabled  
Power Technology set to performance  
Turbo boost set to enabled  
DDR Speed set to force 1866  
Sysinfo program /home/cpu2006/config/sysinfo.rev6874  
\$Rev: 6874 \$ \$Date:: 2013-11-20 #\$ 654bd3fcf53b06faef0efe54ed011998  
running on cpu2006 Sat Jan 18 00:29:33 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) CPU E5-2650 v2 @ 2.60GHz  
2 "physical id"s (chips)  
32 "processors"

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Sugon

SPECint\_rate2006 = 682

I620-G15 (Intel Xeon E5-2650 v2, 2.60 GHz)

SPECint\_rate\_base2006 = 657

CPU2006 license: 9046  
Test sponsor: Sugon  
Tested by: Sugon

Test date: Jan-2014  
Hardware Availability: Dec-2013  
Software Availability: Jan-2014

### Platform Notes (Continued)

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 8
siblings  : 16
physical 0: cores 0 1 2 3 4 5 6 7
physical 1: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB
```

```
From /proc/meminfo
MemTotal:      264502580 kB
HugePages_Total:    0
Hugepagesize:    2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.4 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux cpu2006 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41 EST 2013
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jan 18 00:08
```

```
SPEC is set to: /home/cpu2006
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/mapper/vg_cpu2006-lv_home
                ext4      1.8T  107G  1.6T   7% /home
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS American Megatrends Inc. V8.100A 10/31/2013
Memory:
16x Hynix Semiconductor HMT42GR7AFR4C-RD 16 GB 1 rank 1866 MHz
```

(End of data from sysinfo program)

### General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sugon

SPECint\_rate2006 = 682

I620-G15 (Intel Xeon E5-2650 v2, 2.60 GHz)

SPECint\_rate\_base2006 = 657

CPU2006 license: 9046

Test sponsor: Sugon

Tested by: Sugon

Test date: Jan-2014

Hardware Availability: Dec-2013

Software Availability: Jan-2014

## General Notes (Continued)

memory using RedHat EL 6.4  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled  
Filesystem page cache cleared with:  
echo 1> /proc/sys/vm/drop\_caches  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:  
icc -m32  
  
C++ benchmarks:  
icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
  
C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
-Wl,-z,muldefs -L/sh -lsmartheap

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sugon

SPECint\_rate2006 = 682

I620-G15 (Intel Xeon E5-2650 v2, 2.60 GHz)

SPECint\_rate\_base2006 = 657

CPU2006 license: 9046

Test date: Jan-2014

Test sponsor: Sugon

Hardware Availability: Dec-2013

Tested by: Sugon

Software Availability: Jan-2014

## Peak Compiler Invocation (Continued)

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

401.bzip2: -DSPEC\_CPU\_LP64

456.hmmer: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll4 -auto-ilp32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sugon

SPECint\_rate2006 = 682

I620-G15 (Intel Xeon E5-2650 v2, 2.60 GHz)

SPECint\_rate\_base2006 = 657

CPU2006 license: 9046

Test sponsor: Sugon

Tested by: Sugon

Test date: Jan-2014

Hardware Availability: Dec-2013

Software Availability: Jan-2014

## Peak Optimization Flags (Continued)

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/Sugon-Platform-Settings-V1.2-IVB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/Sugon-Platform-Settings-V1.2-IVB.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 23:18:55 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 22 April 2014.