



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp[®]_rate2006 = 1150

ProLiant DL560 Gen8
(2.40 GHz, Intel Xeon E5-4650 v2)

SPECfp_rate_base2006 = 1120

CPU2006 license: 3


Test date: Feb-2014

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2014

Tested by: Hewlett-Packard Company

Software Availability: Nov-2013

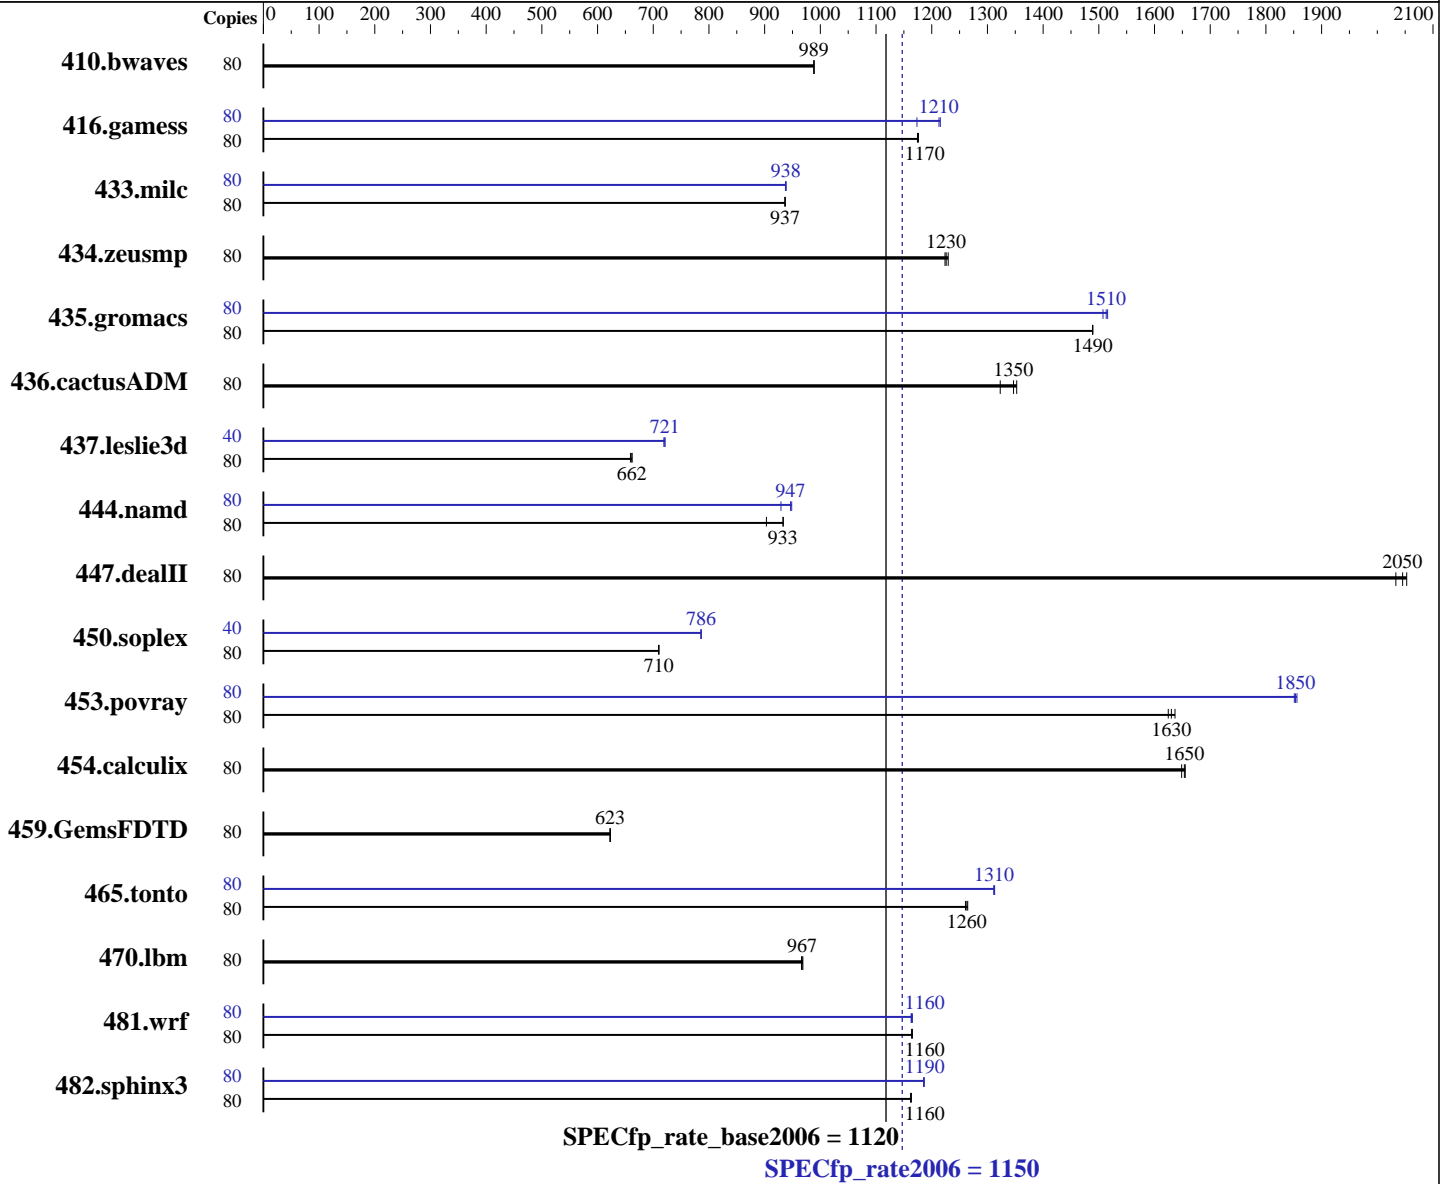

Hardware

CPU Name: Intel Xeon E5-4650 v2
 CPU Characteristics: Intel Turbo Boost Technology up to 2.90 GHz
 CPU MHz: 2400
 FPU: Integrated
 CPU(s) enabled: 40 cores, 4 chips, 10 cores/chip, 2 threads/core
 CPU(s) orderable: 2,4 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)
 Kernel 2.6.32-431.el6.x86_64
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 1150

ProLiant DL560 Gen8
(2.40 GHz, Intel Xeon E5-4650 v2)

SPECfp_rate_base2006 = 1120

CPU2006 license: 3

Test date: Feb-2014

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2014

Tested by: Hewlett-Packard Company

Software Availability: Nov-2013

L3 Cache: 25 MB I+D on chip per chip
Other Cache: None
Memory: 512 GB (32 x 16 GB 2Rx4 PC3-14900R-13, ECC)
Disk Subsystem: 1 x 400 GB SAS SSD, RAID 0
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	80	1100	989	1100	989	1100	988	80	1100	989	1100	989	1100	988
416.gamess	80	1334	1170	1333	1170	1332	1180	80	1291	1210	1335	1170	1289	1220
433.milc	80	784	937	784	936	784	937	80	783	938	783	938	783	937
434.zeusmp	80	595	1220	592	1230	594	1230	80	595	1220	592	1230	594	1230
435.gromacs	80	384	1490	384	1490	384	1490	80	379	1510	377	1520	377	1510
436.cactusADM	80	723	1320	710	1350	707	1350	80	723	1320	710	1350	707	1350
437.leslie3d	80	1137	662	1136	662	1141	659	40	523	719	521	721	522	721
444.namd	80	687	934	688	933	710	903	80	678	947	690	929	676	949
447.dealII	80	446	2050	447	2050	450	2030	80	446	2050	447	2050	450	2030
450.soplex	80	940	710	940	710	939	710	40	424	786	424	786	425	786
453.povray	80	262	1620	261	1630	260	1640	80	230	1850	229	1860	230	1850
454.calculix	80	399	1650	400	1650	399	1660	80	399	1650	400	1650	399	1660
459.GemsFDTD	80	1363	623	1363	623	1363	623	80	1363	623	1363	623	1363	623
465.tonto	80	623	1260	624	1260	622	1260	80	600	1310	600	1310	600	1310
470.lbm	80	1135	969	1138	966	1136	967	80	1135	969	1138	966	1136	967
481.wrf	80	767	1160	767	1170	768	1160	80	767	1170	768	1160	768	1160
482.sphinx3	80	1341	1160	1340	1160	1342	1160	80	1315	1190	1314	1190	1315	1190

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1 > /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 1150

ProLiant DL560 Gen8
(2.40 GHz, Intel Xeon E5-4650 v2)

SPECfp_rate_base2006 = 1120

CPU2006 license: 3

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Feb-2014

Hardware Availability: Mar-2014

Software Availability: Nov-2013

Platform Notes

BIOS Configuration:

HP Power Profile set to Maximum Performance
 Memory Power Savings Mode set to Maximum Performance
 Thermal Configuration set to Maximum Cooling
 Collaborative Power Control set to Disabled
 Dynamic Power Capping Functionality set to Disabled
 Processor Power and Utilization Monitoring set to Disabled
 Memory Refresh Rate set to 1x

Sysinfo program /cpu2006/config/sysinfo.rev6818
 \$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191
 running on DL560p-Gen8-1K4 Fri Feb 14 06:33:26 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) CPU E5-4650 v2 @ 2.40GHz
 4 "physical id"s (chips)
 80 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores    : 10
  siblings     : 20
  physical 0: cores 0 1 2 3 4 8 9 10 11 12
  physical 1: cores 0 1 2 3 4 8 9 10 11 12
  physical 2: cores 0 1 2 3 4 8 9 10 11 12
  physical 3: cores 0 1 2 3 4 8 9 10 11 12
cache size     : 25600 KB
```

From /proc/meminfo

```
MemTotal:      529267592 kB
HugePages_Total: 0
Hugepagesize:   2048 kB
```

/usr/bin/lsb_release -d

Red Hat Enterprise Linux Server release 6.5 (Santiago)

From /etc/*release* /etc/*version*

```
redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

uname -a:

```
Linux DL560p-Gen8-1K4 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST 2013 x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Feb 13 17:46

SPEC is set to: /cpu2006

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 1150

ProLiant DL560 Gen8
(2.40 GHz, Intel Xeon E5-4650 v2)

SPECfp_rate_base2006 = 1120

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Feb-2014
Hardware Availability: Mar-2014
Software Availability: Nov-2013

Platform Notes (Continued)

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda3	ext4	365G	122G	225G	36%	/

Additional information from dmidecode:

BIOS HP P77 11/14/2013

Memory:

32x HP 712383-081 16 GB 1866 MHz 2 rank

16x UNKNOWN NOT AVAILABLE

(End of data from sysinfo program)

Regarding the sysinfo display about the memory installed, the correct amount of memory is 512 GB and the dmidecode description should have one line reading as:

32x HP 712383-081 16 GB 1866 MHz 2 rank

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/cpu2006/libs/32:/cpu2006/libs/64:/cpu2006/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
memory using RedHat EL 6.4

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 1150

ProLiant DL560 Gen8
(2.40 GHz, Intel Xeon E5-4650 v2)

SPECfp_rate_base2006 = 1120

CPU2006 license: 3

Test date: Feb-2014

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2014

Tested by: Hewlett-Packard Company

Software Availability: Nov-2013

Base Portability Flags (Continued)

```

447.deallI: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:

```

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

```

C++ benchmarks:

```

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

```

Fortran benchmarks:

```

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch

```

Benchmarks using both Fortran and C:

```

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

```

Peak Compiler Invocation

C benchmarks (except as noted below):

```

icc -m64

```

```

482.sphinx3: icc -m32

```

C++ benchmarks (except as noted below):

```

icpc -m64

```

```

450.soplex: icpc -m32

```

Fortran benchmarks:

```

ifort -m64

```

Benchmarks using both Fortran and C:

```

icc -m64 ifort -m64

```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 1150

ProLiant DL560 Gen8
(2.40 GHz, Intel Xeon E5-4650 v2)

SPECfp_rate_base2006 = 1120

CPU2006 license: 3

Test date: Feb-2014

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2014

Tested by: Hewlett-Packard Company

Software Availability: Nov-2013

Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

```

Peak Optimization Flags

C benchmarks:

```

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
         -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
         -prof-use(pass 2) -auto-ilp32

```

```

470.lbm: basepeak = yes

```

```

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -opt-mem-layout-trans=3
            -unroll2

```

C++ benchmarks:

```

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
         -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
         -prof-use(pass 2) -fno-alias -auto-ilp32

```

```

447.dealII: basepeak = yes

```

```

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
         -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
         -prof-use(pass 2) -opt-malloc-options=3

```

```

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
         -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
         -prof-use(pass 2) -unroll4 -ansi-alias

```

Fortran benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 1150

ProLiant DL560 Gen8
(2.40 GHz, Intel Xeon E5-4650 v2)

SPECfp_rate_base2006 = 1120

CPU2006 license: 3

Test date: Feb-2014

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2014

Tested by: Hewlett-Packard Company

Software Availability: Nov-2013

Peak Optimization Flags (Continued)

410.bwaves: basepeak = yes

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xSSE4.2 -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-revD.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 23:54:51 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 2 April 2014.