



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M820 (Intel Xeon E5-4610 v2,  
2.30 GHz)

**SPECint®2006 = 44.0**

**SPECint\_base2006 = 41.1**

**CPU2006 license:** 55


**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Feb-2014

**Hardware Availability:** Mar-2014

**Software Availability:** Aug-2013

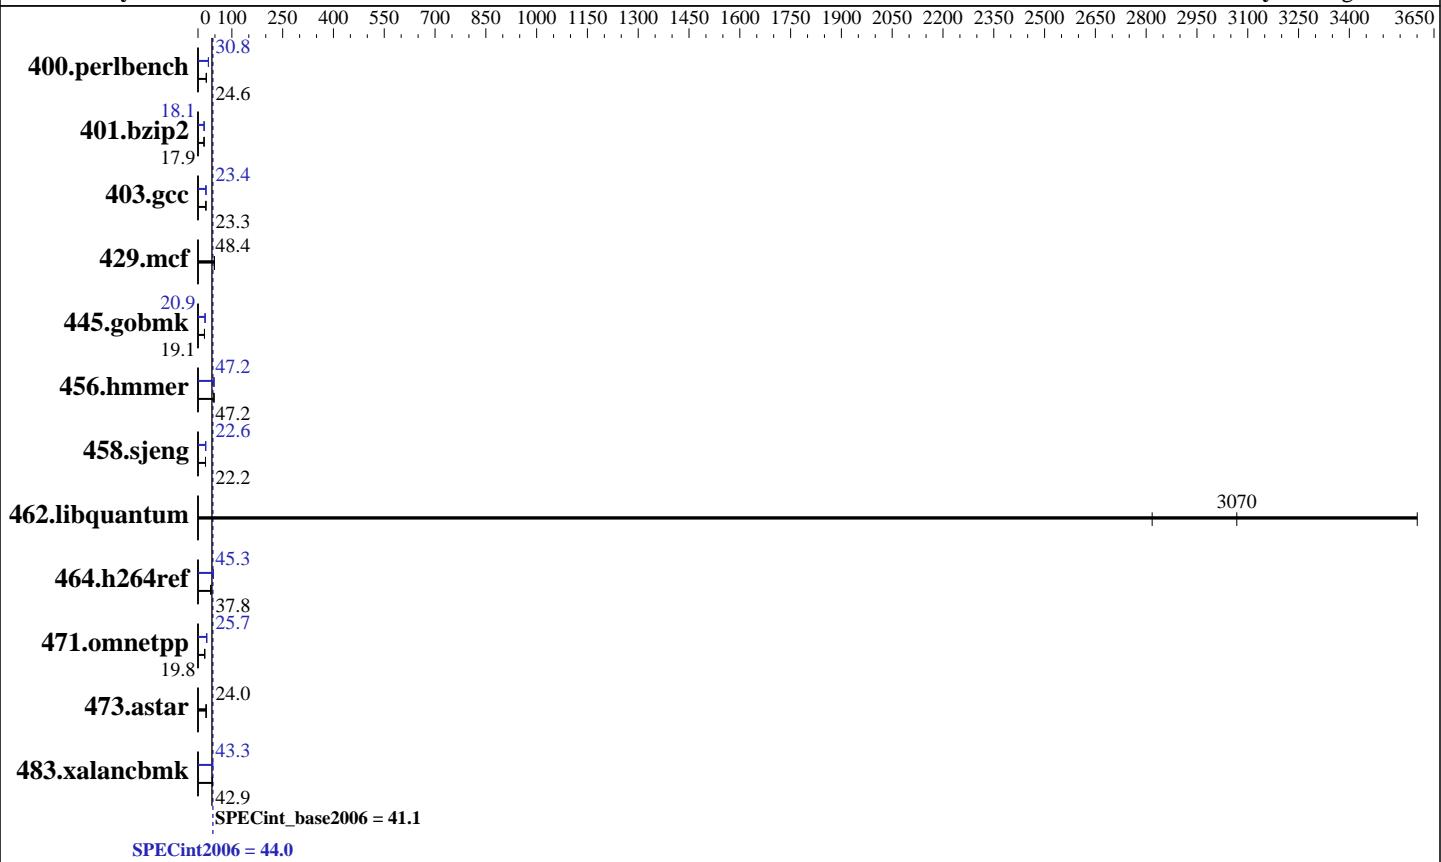

<b>Hardware</b>		<b>Software</b>	
CPU Name:	Intel Xeon E5-4610 v2	Operating System:	SUSE Linux Enterprise Server 11 (x86_64)
CPU Characteristics:	Intel Turbo Boost Technology up to 2.70 GHz		SUSE Linux Enterprise Server 11 (x86_64)
CPU MHz:	2300		3.0.76-0.11-default
FPU:	Integrated	Compiler:	C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux
CPU(s) enabled:	32 cores, 4 chips, 8 cores/chip	Auto Parallel:	Yes
CPU(s) orderable:	4 chip	File System:	ext2
Primary Cache:	32 KB I + 32 KB D on chip per core	System State:	Run level 3 (multi-user)
Secondary Cache:	256 KB I+D on chip per core	Base Pointers:	32/64-bit
L3 Cache:	16 MB I+D on chip per chip	Peak Pointers:	32/64-bit
Other Cache:	None	Other Software:	Microquill SmartHeap V10.0
Memory:	512 GB (32 x 16 GB 2Rx4 PC3-14900R-13, ECC)		
Disk Subsystem:	1 x 600 GB 10000 RPM SAS		
Other Hardware:	None		



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M820 (Intel Xeon E5-4610 v2,  
2.30 GHz)

**SPECint2006 = 44.0**

**SPECint\_base2006 = 41.1**

CPU2006 license: 55

Test date: Feb-2014

Test sponsor: Dell Inc.

Hardware Availability: Mar-2014

Tested by: Dell Inc.

Software Availability: Aug-2013

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	397	24.6	397	24.6	<b>397</b>	<b>24.6</b>	316	30.9	<b>317</b>	<b>30.8</b>	318	30.8
401.bzip2	539	17.9	<b>539</b>	<b>17.9</b>	539	17.9	<b>533</b>	<b>18.1</b>	534	18.1	533	18.1
403.gcc	344	23.4	347	23.2	<b>346</b>	<b>23.3</b>	344	23.4	<b>344</b>	<b>23.4</b>	344	23.4
429.mcf	188	48.4	<b>188</b>	<b>48.4</b>	189	48.3	188	48.4	<b>188</b>	<b>48.4</b>	189	48.3
445.gobmk	<b>549</b>	<b>19.1</b>	548	19.2	551	19.1	501	20.9	<b>502</b>	<b>20.9</b>	502	20.9
456.hmmer	197	47.3	199	46.9	<b>198</b>	<b>47.2</b>	<b>198</b>	<b>47.2</b>	198	47.2	198	47.1
458.sjeng	<b>545</b>	<b>22.2</b>	546	22.2	544	22.2	<b>534</b>	<b>22.6</b>	535	22.6	534	22.7
462.libquantum	<b>6.75</b>	<b>3070</b>	5.75	3600	7.35	2820	<b>6.75</b>	<b>3070</b>	<b>5.75</b>	3600	7.35	2820
464.h264ref	<b>585</b>	<b>37.8</b>	586	37.8	585	37.8	489	45.3	489	45.3	<b>489</b>	<b>45.3</b>
471.omnetpp	315	19.9	317	19.7	<b>316</b>	<b>19.8</b>	<b>243</b>	<b>25.7</b>	244	25.6	243	25.8
473.astar	292	24.1	<b>292</b>	<b>24.0</b>	293	24.0	<b>292</b>	<b>24.1</b>	<b>292</b>	<b>24.0</b>	293	24.0
483.xalancbmk	163	42.2	<b>161</b>	<b>42.9</b>	160	43.1	<b>160</b>	<b>43.2</b>	<b>160</b>	<b>43.3</b>	159	43.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

Virtualization Technology disabled  
 Execute Disable disabled  
 Logical Processor enabled  
 System Profile set to Custom  
 CPU Power Management set to Maximum Performance  
 Memory Frequency set to Maximum Performance  
 Turbo Boost enabled  
 C1E enabled  
 C States enabled  
 Monitor/Mwait enabled  
 Memory Patrol Scrub set to disabled  
 Memory Refresh Rate set to 1x  
 Memory Operating Voltage set to Auto  
 Collaborative CPU Performance Control disabled  
 Sysinfo program /root/cpu2006-1.2/config/sysinfo.rev6818  
 \$Rev: 6818 \$ \$Date:: 2012-07-17 ## e86d102572650a6e4d596a3cee98f191  
 running on linux Mon Feb 10 22:50:03 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M820 (Intel Xeon E5-4610 v2,  
2.30 GHz)

**SPECint2006 = 44.0**

**SPECint\_base2006 = 41.1**

**CPU2006 license:** 55

**Test date:** Feb-2014

**Test sponsor:** Dell Inc.

**Hardware Availability:** Mar-2014

**Tested by:** Dell Inc.

**Software Availability:** Aug-2013

## Platform Notes (Continued)

```
model name : Intel(R) Xeon(R) CPU E5-4610 v2 @ 2.30GHz
        4 "physical id"s (chips)
        32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 8
siblings   : 8
physical 0: cores 0 1 2 3 4 5 6 7
physical 1: cores 0 1 2 3 4 5 6 7
physical 2: cores 0 1 2 3 4 5 6 7
physical 3: cores 0 1 2 3 4 5 6 7
cache size : 16384 KB

From /proc/meminfo
MemTotal:      529392220 kB
HugePages_Total:       0
Hugepagesize:     2048 kB

/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 11 (x86_64)

From /etc/*release* /etc/*version*
SuSE-release:
        SUSE Linux Enterprise Server 11 (x86_64)
VERSION = 11
PATCHLEVEL = 3

uname -a:
Linux linux 3.0.76-0.11-default #1 SMP Fri Jun 14 08:21:43 UTC 2013 (ccab990)
x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Feb 10 22:48 last=S

SPEC is set to: /root/cpu2006-1.2
Filesystem      Type  Size  Used  Avail Use% Mounted on
/dev/sda2        ext2  451G  7.7G  442G   2%  /

Additional information from dmidecode:
BIOS Dell Inc. 2.0.24 01/21/2014
Memory:
8x 002C04B3002C 36JSF2G72PZ-1G9E1 16 GB 1600 MHz
21x 00CE00B300CE M393B2G70DB0-CMA 16 GB 1600 MHz
3x 00CE04B300CE M393B2G70DB0-CMA 16 GB 1600 MHz

(End of data from sysinfo program)
```



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M820 (Intel Xeon E5-4610 v2,  
2.30 GHz)

**SPECint2006 = 44.0**

**SPECint\_base2006 = 41.1**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Feb-2014

**Hardware Availability:** Mar-2014

**Software Availability:** Aug-2013

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/root/cpu2006-1.2/libs/32:/root/cpu2006-1.2/libs/64:/root/cpu2006-1.2/sh"  
OMP\_NUM\_THREADS = "32"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB  
memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
403.gcc: -DSPEC\_CPU\_LP64  
429.mcf: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmr: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
471.omnetpp: -DSPEC\_CPU\_LP64  
473.astar: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-Wl,-z,muldefs -L/sh -lsmartheap64



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M820 (Intel Xeon E5-4610 v2,  
2.30 GHz)

**SPECint2006 = 44.0**

**SPECint\_base2006 = 41.1**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Feb-2014

**Hardware Availability:** Mar-2014

**Software Availability:** Aug-2013

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

400.perlbench: icc -m32

445.gobmk: icc -m32

464.h264ref: icc -m32

C++ benchmarks (except as noted below):

icpc -m32

473.astar: icpc -m64

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

401.bzip2: -DSPEC\_CPU\_LP64

403.gcc: -DSPEC\_CPU\_LP64

429.mcf: -DSPEC\_CPU\_LP64

456.hmmer: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX

473.astar: -DSPEC\_CPU\_LP64

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -ansi-alias

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32  
-opt-prefetch -ansi-alias

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M820 (Intel Xeon E5-4610 v2,  
2.30 GHz)

**SPECint2006 = 44.0**

**SPECint\_base2006 = 41.1**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Feb-2014

**Hardware Availability:** Mar-2014

**Software Availability:** Aug-2013

## Peak Optimization Flags (Continued)

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -inline-calloc  
-opt-malloc-options=3 -auto-ilp32

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias

456.hmmr: -xSSE4.2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32  
-ansi-alias

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll14

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll12 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-ra-region-strategy=block -ansi-alias  
-Wl,-z,muldefs -L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias  
-Wl,-z,muldefs -L/sh -lsmartheap

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>  
<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>  
<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revC.xml>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M820 (Intel Xeon E5-4610 v2,  
2.30 GHz)

**SPECint2006 =** 44.0

**SPECint\_base2006 =** 41.1

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Feb-2014

**Hardware Availability:** Mar-2014

**Software Availability:** Aug-2013

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 22:39:14 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 8 April 2014.