



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer RD340 (Intel Xeon E5-2470 v2,  
2.40 GHz)

**SPECint\_rate2006 = 726**

**SPECint\_rate\_base2006 = 699**

CPU2006 license: 9017


Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

Test date: Nov-2013

Hardware Availability: Jan-2014

Software Availability: Sep-2013

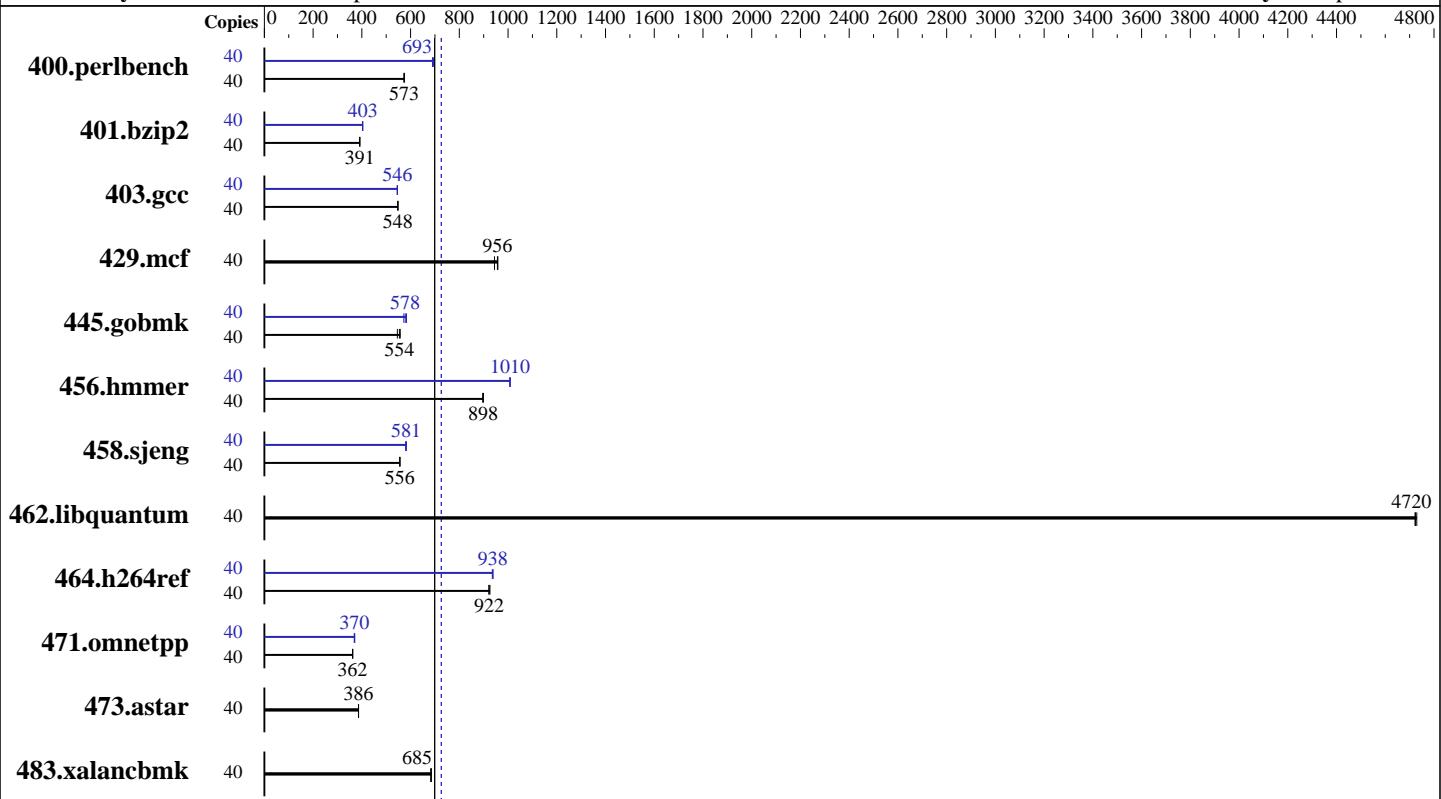

**SPECint\_rate\_base2006 = 699**

**SPECint\_rate2006 = 726**

### Hardware

CPU Name: Intel Xeon E5-2470 v2  
CPU Characteristics: Intel Turbo Boost Technology up to 3.20 GHz  
CPU MHz: 2400  
FPU: Integrated  
CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip, 2 threads/core  
CPU(s) orderable: 1,2 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core  
L3 Cache: 25 MB I+D on chip per chip  
Other Cache: None  
Memory: 96 GB (12 x 8 GB 2Rx8 PC3L-12800R-11, ECC)  
Disk Subsystem: 1 x 400 GB SATA SSD  
Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)  
Compiler: 2.6.32-358.el6.x86\_64  
C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux  
Auto Parallel: No  
File System: ext4  
System State: Run level 3 (Full multiuser with network)  
Base Pointers: 32-bit  
Peak Pointers: 32/64-bit  
Other Software: Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer RD340 (Intel Xeon E5-2470 v2,  
2.40 GHz)

**SPECint\_rate2006 = 726**

**SPECint\_rate\_base2006 = 699**

CPU2006 license: 9017

Test date: Nov-2013

Test sponsor: Lenovo Group Limited

Hardware Availability: Jan-2014

Tested by: Lenovo Group Limited

Software Availability: Sep-2013

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	40	<b>681</b>	<b>573</b>	680	574	682	573	40	<b>564</b>	<b>693</b>	566	690	564	693
401.bzip2	40	987	391	<b>986</b>	<b>391</b>	985	392	40	959	403	<b>957</b>	<b>403</b>	956	404
403.gcc	40	588	548	<b>588</b>	<b>548</b>	588	548	40	<b>589</b>	<b>546</b>	591	545	589	546
429.mcf	40	386	944	<b>381</b>	<b>956</b>	381	958	40	386	944	<b>381</b>	<b>956</b>	381	958
445.gobmk	40	753	558	<b>757</b>	<b>554</b>	769	546	40	719	583	<b>726</b>	<b>578</b>	733	572
456.hammer	40	<b>416</b>	<b>898</b>	416	896	415	898	40	370	1010	<b>370</b>	<b>1010</b>	371	1010
458.sjeng	40	870	556	<b>871</b>	<b>556</b>	871	556	40	835	580	830	583	<b>833</b>	<b>581</b>
462.libquantum	40	<b>175</b>	<b>4720</b>	175	4730	176	4720	40	<b>175</b>	<b>4720</b>	175	4730	176	4720
464.h264ref	40	<b>960</b>	<b>922</b>	956	926	961	921	40	<b>944</b>	<b>938</b>	944	938	946	935
471.omnetpp	40	691	362	<b>690</b>	<b>362</b>	689	363	40	<b>675</b>	<b>370</b>	678	369	675	371
473.astar	40	727	386	<b>727</b>	<b>386</b>	727	386	40	727	386	<b>727</b>	<b>386</b>	727	386
483.xalancbmk	40	404	683	<b>403</b>	<b>685</b>	403	685	40	404	683	<b>403</b>	<b>685</b>	403	685

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

```
Sysinfo program /usr/cpu2006/config/sysinfo.rev6818
$Rev: 6818 $ $Date::: 2012-07-17 #$
running on RD340 Thu Nov 28 17:48:53 2013
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2470 v2 @ 2.40GHz
  2 "physical id"s (chips)
  40 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 10
  siblings  : 20
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer RD340 (Intel Xeon E5-2470 v2,  
2.40 GHz)

**SPECint\_rate2006 = 726**

**SPECint\_rate\_base2006 = 699**

**CPU2006 license:** 9017

**Test date:** Nov-2013

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Jan-2014

**Tested by:** Lenovo Group Limited

**Software Availability:** Sep-2013

## Platform Notes (Continued)

```
physical 0: cores 0 1 2 3 4 8 9 10 11 12
physical 1: cores 0 1 2 3 4 8 9 10 11 12
cache size : 25600 KB

From /proc/meminfo
MemTotal:      99027476 kB
HugePages_Total:      0
Hugepagesize:     2048 kB

/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.4 (Santiago)

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
Linux RD340 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41 EST 2013 x86_64
x86_64 x86_64 GNU/Linux

run-level 3 Nov 27 23:44

SPEC is set to: /usr/cpu2006
Filesystem      Type    Size  Used Avail Use% Mounted on
/dev/sda2        ext4   363G   89G  256G  26%  /


Additional information from dmidecode:
BIOS LENOVO A0TS10A 08/26/2013
Memory:
12x 8 GB
12x Samsung M393B1G73QH0-YK0 8 GB 1600 MHz 2 rank

(End of data from sysinfo program)
RD340 support 3 channels and 6 DIMMS per CPU, total 6 channels and
12 DIMMS. All 12 DIMM slots installed with 8 GB DIMM for this run.
```

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/usr/cpu2006/libs/32:/usr/cpu2006/libs/64:/usr/cpu2006/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB  
memory using RedHat EL 6.4  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enable  
Filesystem page cache cleared with:  
echo 1> /proc/sys/vm/drop\_caches  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer RD340 (Intel Xeon E5-2470 v2,  
2.40 GHz)

**SPECint\_rate2006 = 726**

**SPECint\_rate\_base2006 = 699**

**CPU2006 license:** 9017

**Test date:** Nov-2013

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Jan-2014

**Tested by:** Lenovo Group Limited

**Software Availability:** Sep-2013

## Base Compiler Invocation

C benchmarks:

`icc -m32`

C++ benchmarks:

`icpc -m32`

## Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`

462.libquantum: `-DSPEC_CPU_LINUX`

483.xalancbmk: `-DSPEC_CPU_LINUX`

## Base Optimization Flags

C benchmarks:

`-xAVX -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3`

C++ benchmarks:

`-xAVX -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
-Wl,-z,muldefs -L/sh -lsmartheap`

## Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

## Peak Compiler Invocation

C benchmarks (except as noted below):

`icc -m32`

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:

`icpc -m32`



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer RD340 (Intel Xeon E5-2470 v2,  
2.40 GHz)

**SPECint\_rate2006 = 726**

**SPECint\_rate\_base2006 = 699**

**CPU2006 license:** 9017

**Test date:** Nov-2013

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Jan-2014

**Tested by:** Lenovo Group Limited

**Software Availability:** Sep-2013

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32  
  
401.bzip2: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch  
-auto-ilp32 -ansi-alias  
  
403.gcc: -xAVX -ipo -O3 -no-prec-div  
  
429.mcf: basepeak = yes  
  
445.gobmk: -xAVX(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -opt-mem-layout-trans=3  
  
456.hmmer: -xAVX -ipo -O3 -no-prec-div -unroll12 -auto-ilp32  
  
458.sjeng: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll14  
-auto-ilp32  
  
462.libquantum: basepeak = yes  
  
464.h264ref: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll12  
-ansi-alias

C++ benchmarks:

471.omnetpp: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias  
-opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/sh -lsmartheap  
  
473.astar: basepeak = yes  
  
483.xalancbmk: basepeak = yes



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer RD340 (Intel Xeon E5-2470 v2,  
2.40 GHz)

**SPECint\_rate2006 = 726**

**SPECint\_rate\_base2006 = 699**

**CPU2006 license:** 9017

**Test date:** Nov-2013

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Jan-2014

**Tested by:** Lenovo Group Limited

**Software Availability:** Sep-2013

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Settings-V1.2-revA.20140423.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Settings-V1.2-revA.20140423.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 23:17:22 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 22 April 2014.