SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

Huawei RH5885H v3 (Intel Xeon E7-4860 v2)

SPECint®_rate2006 = 1860

SPECint_rate_base2006 = 1800

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: Apr-2014
Hardware Availability: Feb-2014
Software Availability: Nov-2013

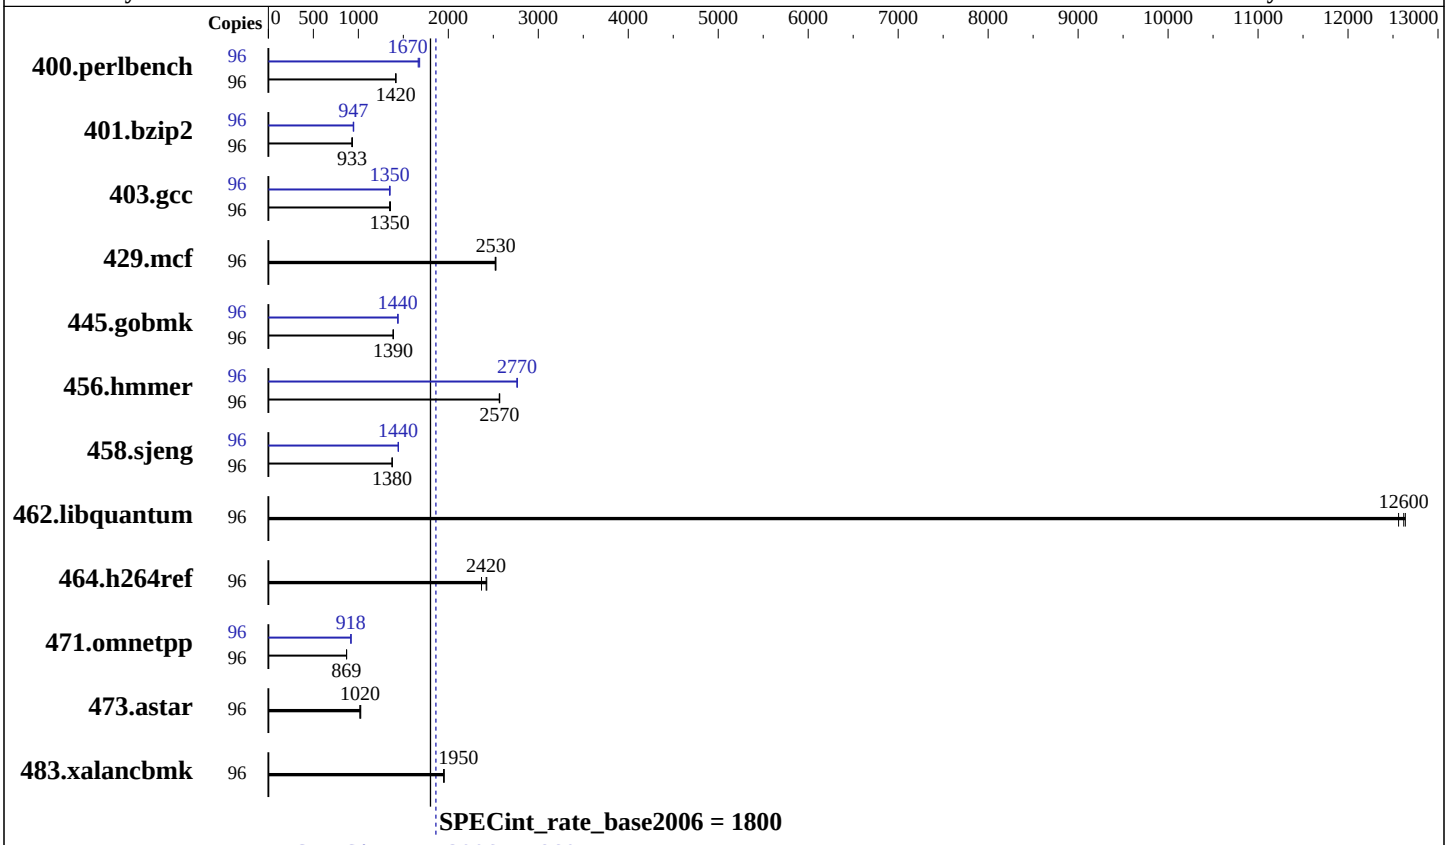

Hardware

CPU Name:	Intel Xeon E7-4860 v2
CPU Characteristics:	Intel Turbo Boost Technology up to 3.20 GHz
CPU MHz:	2600
FPU:	Integrated
CPU(s) enabled:	48 cores, 4 chips, 12 cores/chip, 2 threads/core
CPU(s) orderable:	2,4 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	30 MB I+D on chip per chip
Other Cache:	None
Memory:	512 GB (64 x 8 GB 2Rx4 PC3-10600R-9, ECC)
Disk Subsystem:	2 x 300 GB SAS, 10K RPM
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 6.5 (Santiago) 2.6.32-431.el6.x86_64
Compiler:	C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux
Auto Parallel:	No
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.0

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

Huawei RH5885H v3 (Intel Xeon E7-4860 v2)

SPECint_rate2006 = 1860

SPECint_rate_base2006 = 1800

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: Apr-2014
Hardware Availability: Feb-2014
Software Availability: Nov-2013

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	96	663	1410	661	1420	**662**	**1420**	96	563	1660	**561**	**1670**	558	1680
401.bzip2	96	**993**	**933**	1000	927	991	935	96	982	943	978	948	**978**	**947**
403.gcc	96	**572**	**1350**	573	1350	569	1360	96	571	1350	574	1350	**573**	**1350**
429.mcf	96	**346**	**2530**	347	2520	346	2530	96	**346**	**2530**	347	2520	346	2530
445.gobmk	96	726	1390	**726**	**1390**	725	1390	96	700	1440	**699**	**1440**	699	1440
456.hmmer	96	**348**	**2570**	348	2570	349	2570	96	324	2760	**324**	**2770**	324	2770
458.sjeng	96	845	1370	**844**	**1380**	843	1380	96	**804**	**1440**	804	1440	805	1440
462.libquantum	96	158	12600	157	12600	**158**	**12600**	96	158	12600	157	12600	**158**	**12600**
464.h264ref	96	**878**	**2420**	897	2370	875	2430	96	**878**	**2420**	897	2370	875	2430
471.omnetpp	96	**691**	**869**	690	870	691	868	96	654	918	654	917	**654**	**918**
473.astar	96	663	1020	656	1030	**660**	**1020**	96	663	1020	656	1030	**660**	**1020**
483.xalancbmk	96	339	1950	**339**	**1950**	340	1950	96	339	1950	**339**	**1950**	340	1950

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS configuration:
Set Power Efficiency Mode to Performance
Set Lock_step to disabled
Baseboard Management Controller used to adjust the fan speed to 100%
Sysinfo program /spec/config/sysinfo.rev6818
$Rev: 6818 $ $Date:: 2012-07-17 #$ e86d102572650a6e4d596a3cee98f191
running on speccpu Fri Apr  4 18:24:40 2014

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E7-4860 v2 @ 2.60GHz
      4 "physical id"s (chips)
      96 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
```

Continued on next page

Platform Notes (Continued)

```
      following excerpts from /proc/cpuinfo might not be reliable.  Use with
      caution.)
         cpu cores : 12
         siblings  : 24
         physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13
         physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13
         physical 2: cores 0 1 2 3 4 5 8 9 10 11 12 13
         physical 3: cores 0 1 2 3 4 5 8 9 10 11 12 13
      cache size : 30720 KB

   From /proc/meminfo
      MemTotal:       529101296 kB
      HugePages_Total:       0
      Hugepagesize:       2048 kB

   /usr/bin/lsb_release -d
      Red Hat Enterprise Linux Server release 6.5 (Santiago)

   From /etc/*release* /etc/*version*
      redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
      system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
      system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

   uname -a:
      Linux speccpu 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST 2013
      x86_64 x86_64 x86_64 GNU/Linux

   run-level 3 Apr 4 18:13

   SPEC is set to: /spec
      Filesystem     Type  Size  Used Avail Use% Mounted on
      /dev/sda2      ext4  259G   13G  233G   6% /

   Additional information from dmidecode:
     BIOS American Megatrends Inc. BLISV099 02/09/2014
     Memory:
      64x   8 GB
      32x NO DIMM NO DIMM
      27x Samsung M393B1K70CH0-CH9 8 GB 1333 MHz 2 rank
      37x Samsung M393B1K70DH0-CH9 8 GB 1333 MHz 2 rank

   (End of data from sysinfo program)
   Regarding the sysinfo display about the memory installed, the correct amount of
   memory is 512 GB and the dmidecode description should have two lines reading as:
      27x Samsung M393B1K70CH0-CH9 8 GB 1333 MHz 2 rank
      37x Samsung M393B1K70CH0-CH9 8 GB 1333 MHz 2 rank
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/spec/libs/32:/spec/libs/64:/spec/sh"

 Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
 memory using RedHat EL 6.4
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
 Filesystem page cache cleared with:
 echo 1>       /proc/sys/vm/drop_caches
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:
```
icc  -m32
```

C++ benchmarks:
```
icpc -m32
```

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
```

C++ benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
-Wl,-z,muldefs -L/sh -lsmartheap
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:
icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4 -auto-ilp32

Continued on next page

Peak Optimization Flags (Continued)

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html
http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml
http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 22:15:48 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 6 May 2014.