



# SPEC<sup>®</sup> CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation


## Huawei Huawei CH121

SPECint<sup>®</sup>\_rate2006 = 683

SPECint\_rate\_base2006 = 659

CPU2006 license: 3175  
Test sponsor: Huawei  
Tested by: Huawei

Test date: May-2014  
Hardware Availability: Sep-2013  
Software Availability: Nov-2013

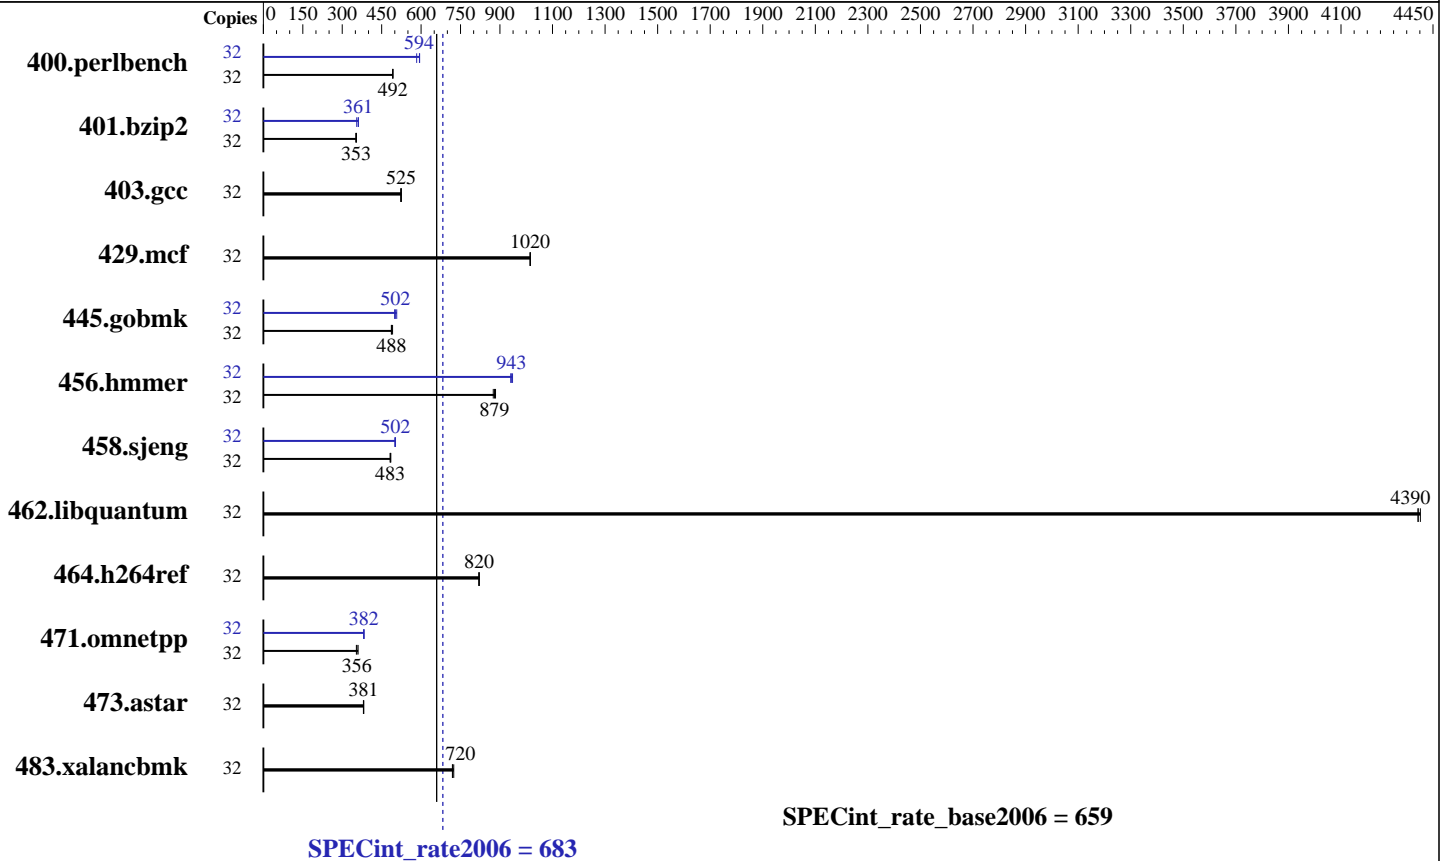

### Hardware

CPU Name: Intel Xeon E5-2650 v2  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.40 GHz  
 CPU MHz: 2600  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 20 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (16 x 16 GB 2Rx4 PC3-14900R-13, ECC)  
 Disk Subsystem: 1 x 300 GB SATA, 7200RPM  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)  
 2.6.32-431.el6.x86\_64  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei  
Huawei CH121

SPECint\_rate2006 = 683  
SPECint\_rate\_base2006 = 659

CPU2006 license: 3175  
Test sponsor: Huawei  
Tested by: Huawei

Test date: May-2014  
Hardware Availability: Sep-2013  
Software Availability: Nov-2013

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	32	<b><u>635</u></b>	<b><u>492</u></b>	634	493	635	492	32	526	594	<b><u>527</u></b>	<b><u>594</u></b>	536	583
401.bzip2	32	<b><u>875</u></b>	<b><u>353</u></b>	878	352	872	354	32	<b><u>856</u></b>	<b><u>361</u></b>	854	361	870	355
403.gcc	32	<b><u>491</u></b>	<b><u>525</u></b>	493	522	491	525	32	<b><u>491</u></b>	<b><u>525</u></b>	493	522	491	525
429.mcf	32	287	1020	<b><u>287</u></b>	<b><u>1020</u></b>	288	1010	32	287	1020	<b><u>287</u></b>	<b><u>1020</u></b>	288	1010
445.gobmk	32	690	487	<b><u>688</u></b>	<b><u>488</u></b>	683	492	32	662	507	672	499	<b><u>668</u></b>	<b><u>502</u></b>
456.hammer	32	338	883	<b><u>339</u></b>	<b><u>879</u></b>	341	875	32	317	941	315	948	<b><u>316</u></b>	<b><u>943</u></b>
458.sjeng	32	<b><u>802</u></b>	<b><u>483</u></b>	799	485	802	483	32	774	500	<b><u>771</u></b>	<b><u>502</u></b>	770	503
462.libquantum	32	151	4400	<b><u>151</u></b>	<b><u>4390</u></b>	151	4390	32	151	4400	<b><u>151</u></b>	<b><u>4390</u></b>	151	4390
464.h264ref	32	864	820	<b><u>863</u></b>	<b><u>820</u></b>	862	822	32	864	820	<b><u>863</u></b>	<b><u>820</u></b>	862	822
471.omnetpp	32	<b><u>562</u></b>	<b><u>356</u></b>	555	360	565	354	32	522	383	524	382	<b><u>523</u></b>	<b><u>382</u></b>
473.astar	32	590	381	588	382	<b><u>589</u></b>	<b><u>381</u></b>	32	590	381	588	382	<b><u>589</u></b>	<b><u>381</u></b>
483.xalancbmk	32	307	719	305	724	<b><u>307</u></b>	<b><u>720</u></b>	32	307	719	305	724	<b><u>307</u></b>	<b><u>720</u></b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS configuration:  
Set Power Efficiency Mode to Performance  
Sysinfo program /spec14/config/sysinfo.rev6818  
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191  
running on localhost.localdomain Fri May 23 08:47:43 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) CPU E5-2650 v2 @ 2.60GHz  
2 "physical id"s (chips)  
32 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei  
Huawei CH121

SPECint\_rate2006 = 683  
SPECint\_rate\_base2006 = 659

CPU2006 license: 3175  
Test sponsor: Huawei  
Tested by: Huawei

Test date: May-2014  
Hardware Availability: Sep-2013  
Software Availability: Nov-2013

## Platform Notes (Continued)

```
cpu cores : 8
siblings  : 16
physical 0: cores 0 1 2 3 4 5 6 7
physical 1: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB
```

```
From /proc/meminfo
MemTotal:      264480104 kB
HugePages_Total: 0
Hugepagesize:  2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.5 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux localhost.localdomain 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54
EST 2013 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 May 23 08:42
```

```
SPEC is set to: /spec14
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       ext4  265G  163G   89G  65% /
```

```
Additional information from dmidecode:
BIOS Insyde Corp. OARYV388 04/23/2014
Memory:
16x Micron 36JSF2G72PZ-1G9E1 16 GB 1866 MHz 2 rank
8x NO DIMM NO DIMM
```

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/spec14/libs/32:/spec14/libs/64:/spec14/sh"

```
Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
memory using RedHat EL 6.4
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei  
Huawei CH121

SPECint\_rate2006 = 683  
SPECint\_rate\_base2006 = 659

CPU2006 license: 3175  
Test sponsor: Huawei  
Tested by: Huawei

Test date: May-2014  
Hardware Availability: Sep-2013  
Software Availability: Nov-2013

## Base Compiler Invocation

C benchmarks:  
icc -m32  
  
C++ benchmarks:  
icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
  
C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
-Wl,-z,muldefs -L/sh -lsmartheap

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m32  
  
400.perlbench: icc -m64  
401.bzip2: icc -m64  
456.hmmer: icc -m64  
458.sjeng: icc -m64  
  
C++ benchmarks:  
icpc -m32



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei  
Huawei CH121

SPECint\_rate2006 = 683

SPECint\_rate\_base2006 = 659

CPU2006 license: 3175  
Test sponsor: Huawei  
Tested by: Huawei

Test date: May-2014  
Hardware Availability: Sep-2013  
Software Availability: Nov-2013

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32  
401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias  
403.gcc: basepeak = yes  
429.mcf: basepeak = yes  
445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -opt-mem-layout-trans=3  
456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32  
458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll4 -auto-ilp32  
462.libquantum: basepeak = yes  
464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/sh -lsmartheap  
473.astar: basepeak = yes  
483.xalancbmk: basepeak = yes



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei  
Huawei CH121

SPECint\_rate2006 = 683

SPECint\_rate\_base2006 = 659

CPU2006 license: 3175  
Test sponsor: Huawei  
Tested by: Huawei

Test date: May-2014  
Hardware Availability: Sep-2013  
Software Availability: Nov-2013

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>  
<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>  
<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 23:51:54 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 18 June 2014.