SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M3 (Intel Xeon E5-2609 v2, 2.50 GHz)

SPECfp®2006 = 66.2

SPECfp_base2006 = 64.2

CPU2006 license: 9019
Test sponsor: Cisco Systems
Tested by: Cisco Systems

Test date: May-2014
Hardware Availability: Dec-2013
Software Availability: Mar-2014

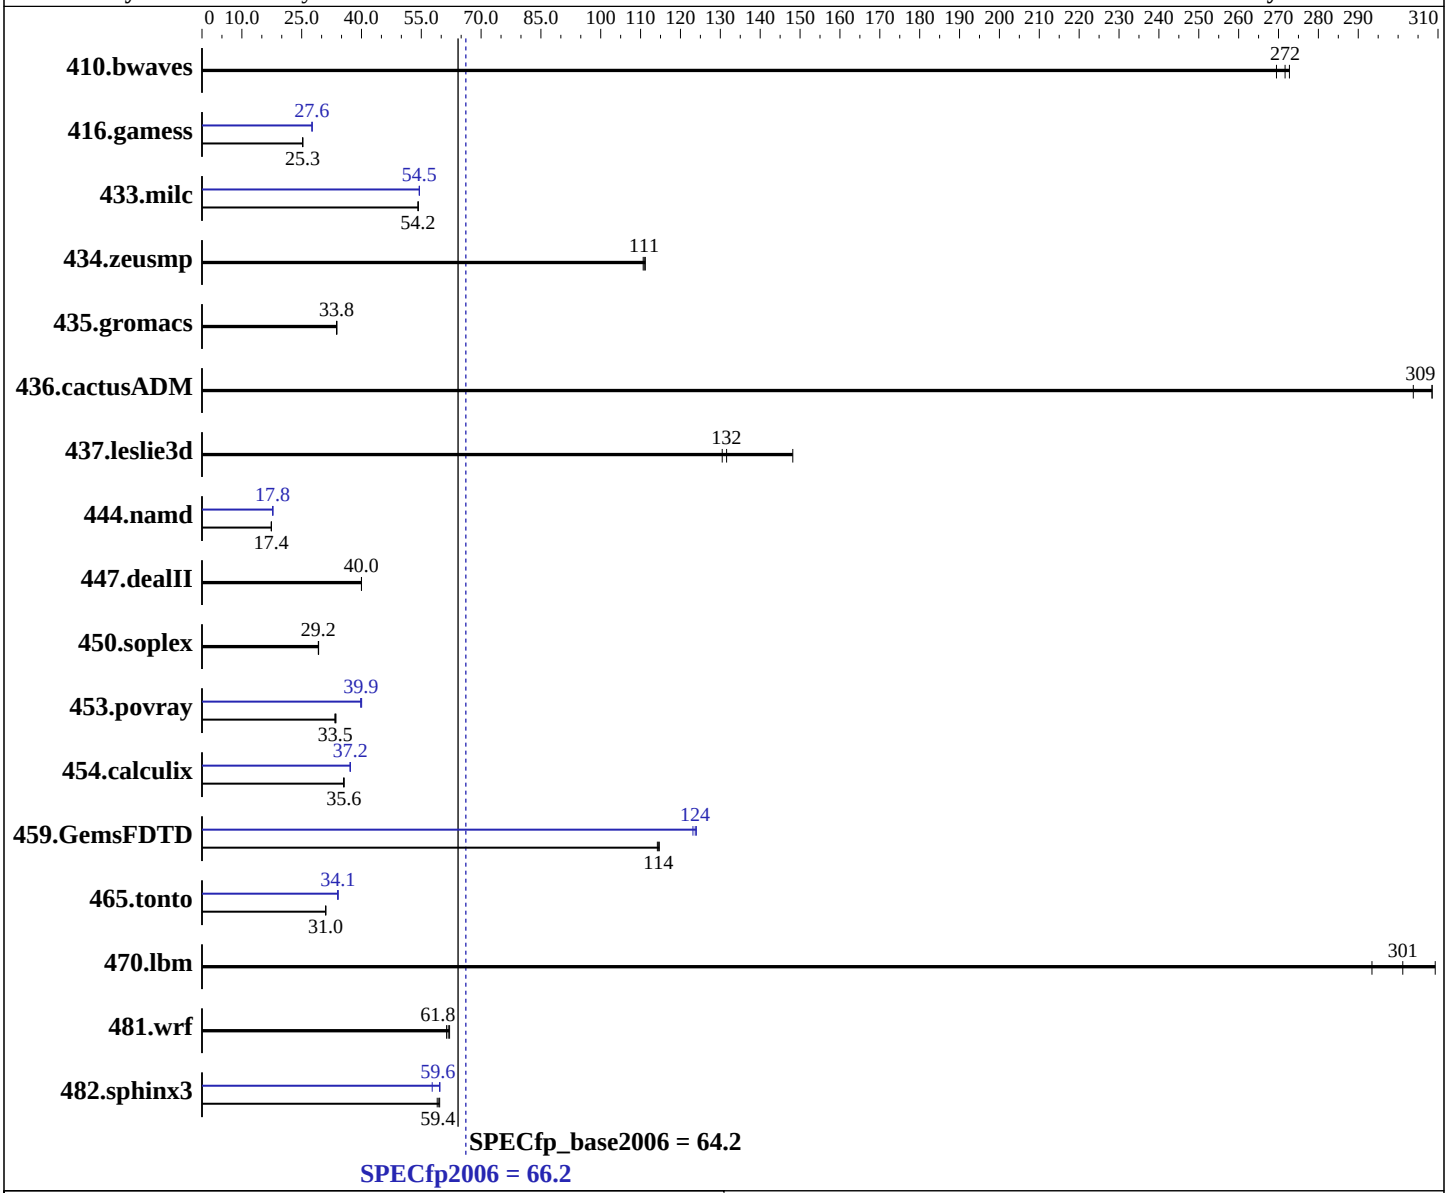

Hardware

CPU Name:	Intel Xeon E5-2609 v2
CPU Characteristics:	
CPU MHz:	2500
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 6.5 (Santiago) 2.6.32-431.el6.x86_64
Compiler:	C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux; Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
Auto Parallel:	Yes
File System:	ext4

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M3 (Intel Xeon E5-2609 v2, 2.50 GHz)

SPECfp2006 = 66.2

SPECfp_base2006 = 64.2

CPU2006 license: 9019
Test sponsor: Cisco Systems
Tested by: Cisco Systems

Test date: May-2014
Hardware Availability: Dec-2013
Software Availability: Mar-2014

L3 Cache: 10 MB I+D on chip per chip
Other Cache: None
Memory: 128 GB (16 x 8 GB 2Rx4 PC3-14900R-13, ECC, running at 1333 MHz and CL7)
Disk Subsystem: 1 X 300 GB 15000 RPM SAS
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	49.8	273	50.4	269	**50.0**	**272**	49.8	273	50.4	269	**50.0**	**272**
416.gamess	774	25.3	**775**	**25.3**	776	25.2	709	27.6	**709**	**27.6**	709	27.6
433.milc	**169**	**54.2**	169	54.2	169	54.2	168	54.5	**168**	**54.5**	168	54.5
434.zeusmp	82.2	111	81.8	111	**82.0**	**111**	82.2	111	81.8	111	**82.0**	**111**
435.gromacs	212	33.8	**211**	**33.8**	211	33.8	212	33.8	**211**	**33.8**	211	33.8
436.cactusADM	39.3	304	38.7	309	**38.7**	**309**	39.3	304	38.7	309	**38.7**	**309**
437.leslie3d	72.0	130	**71.4**	**132**	63.4	148	72.0	130	**71.4**	**132**	63.4	148
444.namd	**461**	**17.4**	461	17.4	461	17.4	452	17.7	**452**	**17.8**	452	17.8
447.dealII	**286**	**40.0**	286	40.0	286	40.0	**286**	**40.0**	286	40.0	286	40.0
450.soplex	**286**	**29.2**	285	29.3	286	29.2	**286**	**29.2**	285	29.3	286	29.2
453.povray	**159**	**33.5**	158	33.6	160	33.3	133	40.0	**133**	**39.9**	134	39.8
454.calculix	**232**	**35.6**	232	35.6	232	35.5	**222**	**37.2**	222	37.2	222	37.2
459.GemsFDTD	**92.7**	**114**	92.9	114	92.5	115	86.2	123	**85.8**	**124**	85.6	124
465.tonto	317	31.0	**317**	**31.0**	317	31.0	**288**	**34.1**	288	34.1	289	34.0
470.lbm	**45.6**	**301**	46.8	293	44.4	309	**45.6**	**301**	46.8	293	44.4	309
481.wrf	180	62.1	**181**	**61.8**	182	61.3	180	62.1	**181**	**61.8**	182	61.3
482.sphinx3	327	59.6	**328**	**59.4**	330	59.0	338	57.7	**327**	**59.6**	327	59.7

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
CPU performance set to HPC
Power Technology set to Custom
CPU Power State C6 set to Enabled
CPU Power State C1 Enhanced set to Disabled
Memory RAS configuration set to Maximum Performance
DRAM Clock Throttling Set to Performance
 Sysinfo program /opt/cpu2006-1.4/config/sysinfo.rev6818
 $Rev: 6818 $ $Date:: 2012-07-17 #$ e86d102572650a6e4d596a3cee98f191
 running on c240m3 Wed May 28 16:17:45 2014
```

Continued on next page

Platform Notes (Continued)

```
This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E5-2609 v2 @ 2.50GHz
      2 "physical id"s (chips)
      8 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 4
      siblings  : 4
      physical 0: cores 0 1 2 3
      physical 1: cores 0 1 2 3
   cache size : 10240 KB

From /proc/meminfo
   MemTotal:       132126952 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

/usr/bin/lsb_release -d
   Red Hat Enterprise Linux Server release 6.5 (Santiago)

From /etc/*release* /etc/*version*
   redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
   system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
   system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
   Linux c240m3 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST 2013 x86_64
   x86_64 x86_64 GNU/Linux

run-level 3 May 28 16:16

SPEC is set to: /opt/cpu2006-1.4
   Filesystem     Type  Size  Used Avail Use% Mounted on
   /dev/sda1      ext4  275G   19G  242G   8% /

Additional information from dmidecode:
  BIOS Cisco Systems, Inc. C240M3.1.5.4h.0.031920140456 03/19/2014
  Memory:
   16x 0xAD00 HMT31GR7EFR4C-RD 8 GB 1333 MHz 2 rank
   8x NO DIMM NO DIMM

(End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
KMP_AFFINITY = "granularity=fine,compact,1,0"
LD_LIBRARY_PATH = "/opt/cpu2006-1.4/libs/32:/opt/cpu2006-1.4/libs/64:/opt/cpu2006-1.4/sh"
OMP_NUM_THREADS = "8"

 Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
 memory using RedHat EL 6.4
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>

Submitted_by: "Sheshgiri I (shei)" <shei@cisco.com>
Submitted: Mon Jun  2 06:41:55 EDT 2014
Submission: cpu2006-20140602-29748.sub
```

Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Base Portability Flags

```
    410.bwaves: -DSPEC_CPU_LP64
    416.gamess: -DSPEC_CPU_LP64
      433.milc: -DSPEC_CPU_LP64
    434.zeusmp: -DSPEC_CPU_LP64
    435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
    437.leslie3d: -DSPEC_CPU_LP64
     444.namd: -DSPEC_CPU_LP64
    447.dealII: -DSPEC_CPU_LP64
    450.soplex: -DSPEC_CPU_LP64
    453.povray: -DSPEC_CPU_LP64
    454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
      465.tonto: -DSPEC_CPU_LP64
       470.lbm: -DSPEC_CPU_LP64
```

Continued on next page

Base Portability Flags (Continued)

481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX`
482.sphinx3: `-DSPEC_CPU_LP64`

Base Optimization Flags

C benchmarks:
`-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias`

C++ benchmarks:
`-xAVX -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias`

Fortran benchmarks:
`-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch`

Benchmarks using both Fortran and C:
`-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias`

Peak Compiler Invocation

C benchmarks:
`icc -m64`

C++ benchmarks:
`icpc -m64`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`icc -m64 ifort -m64`

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: `-xAVX`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-auto-ilp32` `-ansi-alias`

Continued on next page

Peak Optimization Flags (Continued)

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll2 -ansi-alias -parallel

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc -opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html
http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revB.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml
http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revB.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 23:53:44 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 18 June 2014.