



# SPEC<sup>®</sup> CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation


IBM System x iDataPlex dx360 M4  
(Intel Xeon E5-2650 v2, 2.60 GHz)

SPECint<sup>®</sup>\_rate2006 = 683

SPECint\_rate\_base2006 = 659

CPU2006 license: 11  
Test sponsor: IBM Corporation  
Tested by: IBM Corporation

Test date: May-2014  
Hardware Availability: Dec-2013  
Software Availability: Sep-2013

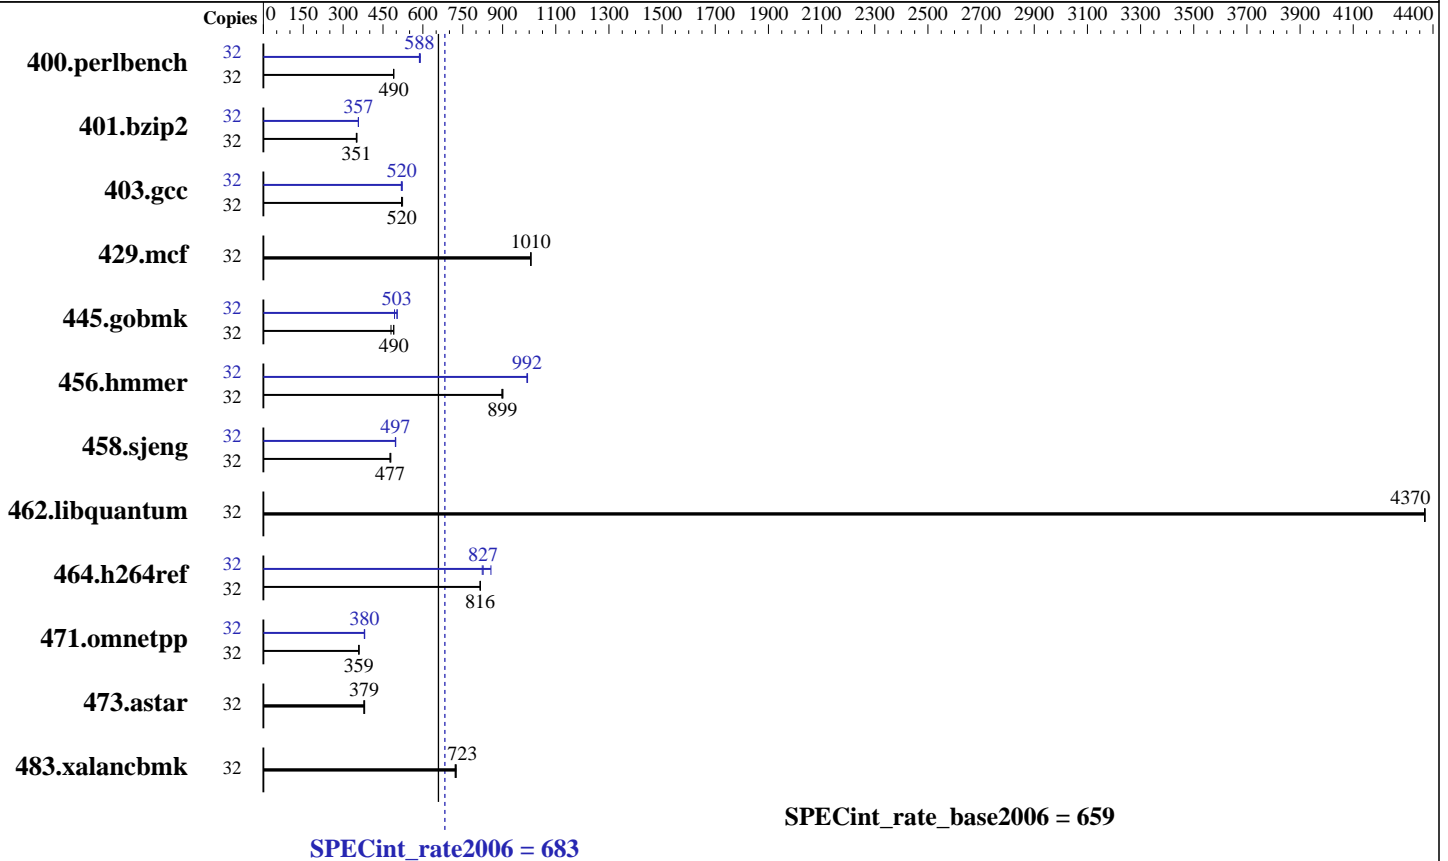

### Hardware

CPU Name: Intel Xeon E5-2650 v2  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.40 GHz  
 CPU MHz: 2600  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 20 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (16 x 16 GB 2Rx4 PC3-14900R-13, ECC)  
 Disk Subsystem: 1 x 500 GB SATA, 7200 RPM  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)  
 2.6.32-358.el6.x86\_64  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM System x iDataPlex dx360 M4  
(Intel Xeon E5-2650 v2, 2.60 GHz)

SPECint\_rate2006 = 683

SPECint\_rate\_base2006 = 659

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: May-2014

Hardware Availability: Dec-2013

Software Availability: Sep-2013

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	32	<b>638</b>	<b>490</b>	637	491	638	490	32	<b>532</b>	<b>588</b>	533	587	529	591
401.bzip2	32	<b>880</b>	<b>351</b>	883	350	877	352	32	864	357	<b>864</b>	<b>357</b>	863	358
403.gcc	32	492	524	496	520	<b>495</b>	<b>520</b>	32	496	519	<b>495</b>	<b>520</b>	493	522
429.mcf	32	290	1010	<b>290</b>	<b>1010</b>	290	1010	32	290	1010	<b>290</b>	<b>1010</b>	290	1010
445.gobmk	32	699	480	684	490	<b>685</b>	<b>490</b>	32	680	493	<b>668</b>	<b>503</b>	667	504
456.hammer	32	<b>332</b>	<b>899</b>	331	901	333	897	32	<b>301</b>	<b>992</b>	300	994	301	992
458.sjeng	32	812	477	807	480	<b>811</b>	<b>477</b>	32	778	498	<b>779</b>	<b>497</b>	780	497
462.libquantum	32	152	4370	<b>152</b>	<b>4370</b>	152	4370	32	152	4370	<b>152</b>	<b>4370</b>	152	4370
464.h264ref	32	<b>868</b>	<b>816</b>	867	817	869	815	32	827	856	<b>856</b>	<b>827</b>	860	823
471.omnetpp	32	<b>557</b>	<b>359</b>	555	360	558	359	32	<b>526</b>	<b>380</b>	526	380	525	381
473.astar	32	590	381	<b>592</b>	<b>379</b>	594	378	32	590	381	<b>592</b>	<b>379</b>	594	378
483.xalancbmk	32	<b>305</b>	<b>723</b>	304	726	306	721	32	<b>305</b>	<b>723</b>	304	726	306	721

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Zone reclaim mode enabled with:  
echo 1 > /proc/sys/vm/zone\_reclaim\_mode  
Intel Idle Driver disabled with the following Linux kernel parameter in /etc/grub.conf:  
intel\_idle.max\_cstate=0

## Platform Notes

BIOS setting:  
Operating Mode set to Maximum Performance  
Sysinfo program /home/SPECcpu-20140116-ic14.0/config/sysinfo.rev6818  
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191  
running on dx360M4 Sat May 31 10:05:56 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) CPU E5-2650 v2 @ 2.60GHz  
2 "physical id"s (chips)

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

**SPECint\_rate2006 = 683**

IBM System x iDataPlex dx360 M4  
(Intel Xeon E5-2650 v2, 2.60 GHz)

**SPECint\_rate\_base2006 = 659**

**CPU2006 license:** 11

**Test date:** May-2014

**Test sponsor:** IBM Corporation

**Hardware Availability:** Dec-2013

**Tested by:** IBM Corporation

**Software Availability:** Sep-2013

## Platform Notes (Continued)

32 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 8
siblings  : 16
physical 0: cores 0 1 2 3 4 5 6 7
physical 1: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB
```

From /proc/meminfo

```
MemTotal:      264641468 kB
HugePages_Total: 0
Hugepagesize:  2048 kB
```

/usr/bin/lsb\_release -d

```
Red Hat Enterprise Linux Server release 6.4 (Santiago)
```

From /etc/\*release\* /etc/\*version\*

```
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

uname -a:

```
Linux dx360M4 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41 EST 2013
x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 May 30 11:48

SPEC is set to: /home/SPECcpu-20140116-ic14.0

```
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/mapper/vg_td2-lv_home
ext4            380G    173G  188G  49% /home
```

Additional information from dmidecode:

```
BIOS IBM -[TDE139OUS-1.50]- 02/21/2014
```

Memory:

```
16x Samsung M393B2G70QH0-CMA 16 GB 1867 MHz 2 rank
```

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/home/SPECcpu-20140116-ic14.0/libs/32:/home/SPECcpu-20140116-ic14.0/libs/64:/home/SPECcpu-20140116-ic14.0/sh"
```

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB  
memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Filesystem page cache cleared with:

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 3



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

IBM System x iDataPlex dx360 M4  
(Intel Xeon E5-2650 v2, 2.60 GHz)

**SPECint\_rate2006 = 683**

**SPECint\_rate\_base2006 = 659**

**CPU2006 license:** 11

**Test sponsor:** IBM Corporation

**Tested by:** IBM Corporation

**Test date:** May-2014

**Hardware Availability:** Dec-2013

**Software Availability:** Sep-2013

## General Notes (Continued)

```
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```

## Base Compiler Invocation

C benchmarks:  
icc -m32

C++ benchmarks:  
icpc -m32

## Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX
```

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
-Wl,-z,muldefs -L/sh -lsmartheap

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

IBM System x iDataPlex dx360 M4  
(Intel Xeon E5-2650 v2, 2.60 GHz)

**SPECint\_rate2006 = 683**

**SPECint\_rate\_base2006 = 659**

**CPU2006 license:** 11

**Test sponsor:** IBM Corporation

**Tested by:** IBM Corporation

**Test date:** May-2014

**Hardware Availability:** Dec-2013

**Software Availability:** Sep-2013

## Peak Compiler Invocation (Continued)

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:

`icpc -m32`

## Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`

401.bzip2: `-DSPEC_CPU_LP64`

456.hmmer: `-DSPEC_CPU_LP64`

458.sjeng: `-DSPEC_CPU_LP64`

462.libquantum: `-DSPEC_CPU_LINUX`

483.xalancbmk: `-DSPEC_CPU_LINUX`

## Peak Optimization Flags

C benchmarks:

400.perlbench: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32`

401.bzip2: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias`

403.gcc: `-xSSE4.2 -ipo -O3 -no-prec-div`

429.mcf: `basepeak = yes`

445.gobmk: `-xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -opt-mem-layout-trans=3`

456.hmmer: `-xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32`

458.sjeng: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll4 -auto-ilp32`

462.libquantum: `basepeak = yes`

464.h264ref: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias`

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

IBM System x iDataPlex dx360 M4  
(Intel Xeon E5-2650 v2, 2.60 GHz)

**SPECint\_rate2006 = 683**

**SPECint\_rate\_base2006 = 659**

**CPU2006 license:** 11  
**Test sponsor:** IBM Corporation  
**Tested by:** IBM Corporation

**Test date:** May-2014  
**Hardware Availability:** Dec-2013  
**Software Availability:** Sep-2013

## Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>  
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-B.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>  
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-B.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Fri Jul 25 00:15:59 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 1 July 2014.