



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp[®]_rate2006 = 1330

IBM Power S824 (3.5 GHz, 24 core, RHEL)

SPECfp_rate_base2006 = 1130

CPU2006 license: 11


Test date: Jun-2014

Test sponsor: IBM Corporation

Hardware Availability: Jun-2014

Tested by: IBM Corporation

Software Availability: Jun-2014

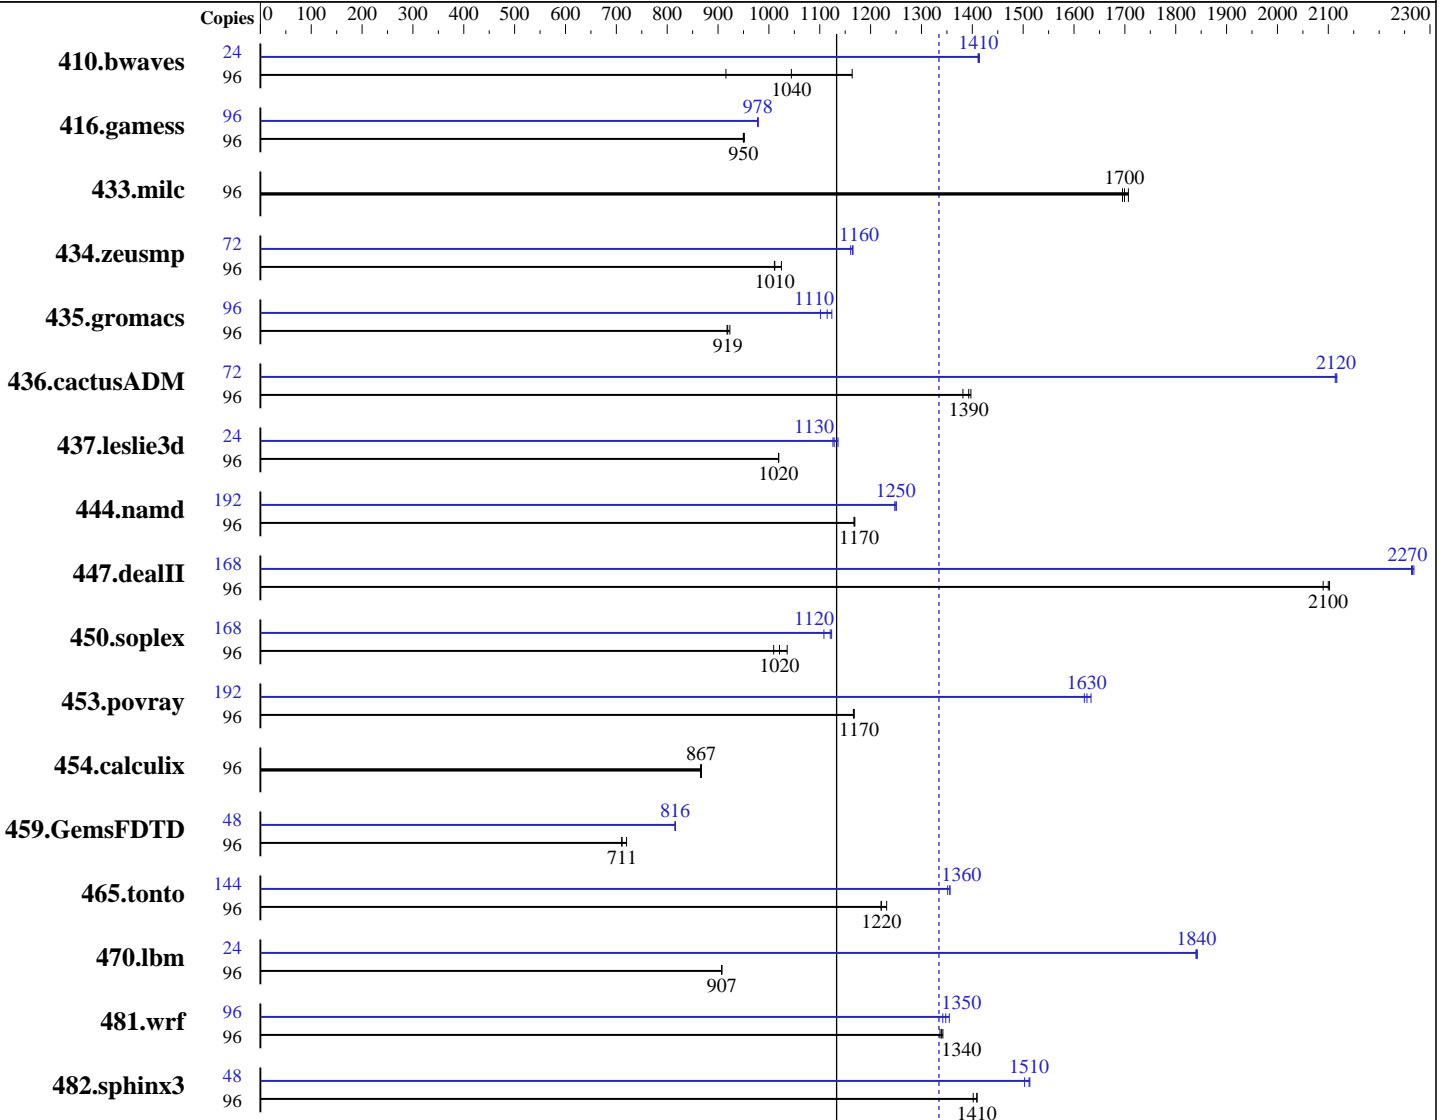

SPECfp_rate_base2006 = 1130

SPECfp_rate2006 = 1330

Hardware

CPU Name: POWER8
 CPU Characteristics: Intelligent Energy Optimization enabled, up to 3.92 GHz
 CPU MHz: 3525
 FPU: Integrated
 CPU(s) enabled: 24 cores, 4 chips, 6 cores/chip, 8 threads/core
 CPU(s) orderable: 2 Modules
 Primary Cache: 32 KB I + 64 KB D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 7.0 (ppc64) kernel 3.10.0-123.el7.ppc64
 Compiler: C/C++: Version 13.1 of IBM XL C/C++ for Linux; Fortran: Version 15.1 of IBM XL Fortran for Linux
 Auto Parallel: No
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 1330

IBM Power S824 (3.5 GHz, 24 core, RHEL)

SPECfp_rate_base2006 = 1130

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Jun-2014
Hardware Availability: Jun-2014
Software Availability: Jun-2014

Secondary Cache: 512 KB I+D on chip per core
L3 Cache: 8 MB I+D on chip per core
Other Cache: 16 MB I+D off chip per CDIMM
Memory: 512 GB (16 x 32 GB CDIMMs) DDR3 1600 MHz
Disk Subsystem: 5 x 300 GB 15K RPM SAS SF-2 Raid0
Other Hardware: None

Other Software: Post-Link Optimization for Linux on POWER, version 5.7.0
IBM Advance Toolchain 7.0-3

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	96	1249	1040	1121	1160	1425	915	24	231	1410	231	1410	231	1410		
416.gamess	96	1978	950	1975	952	1979	950	96	1921	978	1922	978	1920	979		
433.milc	96	520	1700	516	1710	519	1700	96	520	1700	516	1710	519	1700		
434.zeusmp	96	864	1010	853	1020	864	1010	72	562	1170	563	1160	564	1160		
435.gromacs	96	747	918	746	919	742	923	96	615	1110	610	1120	622	1100		
436.cactusADM	96	821	1400	830	1380	824	1390	72	406	2120	407	2120	407	2110		
437.leslie3d	96	886	1020	886	1020	885	1020	24	199	1140	200	1130	200	1130		
444.namd	96	659	1170	659	1170	659	1170	192	1234	1250	1232	1250	1231	1250		
447.dealII	96	522	2100	526	2090	523	2100	168	848	2270	849	2260	847	2270		
450.soplex	96	773	1040	793	1010	784	1020	168	1264	1110	1247	1120	1250	1120		
453.povray	96	438	1170	438	1170	437	1170	192	630	1620	625	1630	628	1630		
454.calculix	96	915	866	914	867	913	867	96	915	866	914	867	913	867		
459.GemsFDTD	96	1434	710	1432	711	1415	720	48	625	815	624	816	624	816		
465.tonto	96	774	1220	767	1230	774	1220	144	1045	1360	1045	1360	1048	1350		
470.lbm	96	1453	908	1454	907	1454	907	24	179	1840	179	1840	179	1840		
481.wrf	96	802	1340	800	1340	799	1340	96	792	1350	799	1340	796	1350		
482.sphinx3	96	1335	1400	1327	1410	1328	1410	48	623	1500	619	1510	618	1510		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Peak Tuning Notes

```

410.bwaves fdpr options: -O4 -m power8 -A 2 -rcl 2 -sls -dir -vrox
416.gamess fdpr options: -O4 -m power8 -A 2 -rcl 2 -sls -dir -vrox
433.milc fdpr options: -O4 -m power8 -A 2 -rcl 2 -sls -dir -vrox
434.zeusmp fdpr options: -O4 -m power8 -A 2 -rcl 2 -sls -dir -vrox
435.gromacs fdpr options: -O4 -m power8 -A 2 -rcl 2 -sls -dir -vrox
436.cactusADM fdpr options: -O4 -m power8 -A 2 -sls -dir -vrox
437.leslie3d fdpr options: -O4 -m power8 -A 2 -rcl 2 -sls -dir -vrox
444.namd fdpr options: -O4 -m power8 -A 2 -rcl 2 -sls -dir -vrox
447.dealII fdpr options: -O4 -m power8 -A 2 -rcl 2 -sls -dir -vrox
453.povray fdpr options: -O4 -m power8 -A 2 -rcl 2 -sls -dir -vrox
454.calculix fdpr options: -O4 -m power8 -A 2 -rcl 2 -sls -dir -vrox
459.GemsFDTD fdpr options: -O4 -m power8 -A 2 -sls -dir -vrox
465.tonto fdpr options: -O4 -m power8 -A 2 -sls -dir -vrox

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 1330

IBM Power S824 (3.5 GHz, 24 core, RHEL)

SPECfp_rate_base2006 = 1130

CPU2006 license: 11

Test date: Jun-2014

Test sponsor: IBM Corporation

Hardware Availability: Jun-2014

Tested by: IBM Corporation

Software Availability: Jun-2014

Peak Tuning Notes (Continued)

470.lbm fdpr options: -O4 -m power8 -A 2 -rcl 2 -sls -dir -vrox
481.wrf fdpr options: -O4 -m power8 -A 2 -rcl 2 -sls -dir -vrox
482.sphinx3 fdpr options: -O4 -m power8 -A 2 -rcl 2 -sls -dir -vrox

Submit Notes

The config file option 'submit' was used to assign benchmark copy to specific kernel thread using the "numactl" command (see flags file for details).

Operating System Notes

ulimit -s (stack) set to 1048576.

19200 16M large pages defined with sysctl command
Transparent huge page disabled with
echo never > /sys/kernel/mm/transparent_hugepage/enabled
sysctl vm.nr_hugepages=N and reboot to set large page pool

General Notes

Environment variables set by runspec before the start of the run:
HUGETLB_MORECORE = "yes"
HUGETLB_VERBOSE = "0"
XLFRTEOPTS = "intrinths=1"

Base Compiler Invocation

C benchmarks:
/opt/ibm/xlC/13.1.0/bin/xlc_at -qlanglvl=extc99

C++ benchmarks:
/opt/ibm/xlC/13.1.0/bin/xlc_at

Fortran benchmarks:
/opt/ibm/xlf/15.1.0/bin/xlf95_at

Benchmarks using both Fortran and C:
/opt/ibm/xlC/13.1.0/bin/xlc_at -qlanglvl=extc99
/opt/ibm/xlf/15.1.0/bin/xlf95_at

Base Portability Flags

410.bwaves: -qfixed

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 1330

IBM Power S824 (3.5 GHz, 24 core, RHEL)

SPECfp_rate_base2006 = 1130

CPU2006 license: 11

Test date: Jun-2014

Test sponsor: IBM Corporation

Hardware Availability: Jun-2014

Tested by: IBM Corporation

Software Availability: Jun-2014

Base Portability Flags (Continued)

```

416.gamess: -qfixed
434.zeusmp: -qfixed
435.gromacs: -qfixed -qextname
436.cactusADM: -qfixed -qextname
437.leslie3d: -qfixed
454.calculix: -qfixed -qextname
481.wrf: -DNOUNDERSCORE
482.sphinx3: -qchars=signed

```

Base Optimization Flags

C benchmarks:
 -qinline=40 -qipa=threads -qlargepage -O5 -qsimd=noauto -lhugetlbfs

C++ benchmarks:
 -qinline=40 -qipa=threads -qlargepage -O5 -qrtti -lhugetlbfs

Fortran benchmarks:
 -qipa=threads -qlargepage -O5 -qalias=nostd -lhugetlbfs

Benchmarks using both Fortran and C:
 -qinline=40 -qipa=threads -qlargepage -O5 -qsimd=noauto
 -qalias=nostd -lhugetlbfs

Base Other Flags

C benchmarks:
 -qipa=noobject -qsuppress=1500-036

C++ benchmarks:
 -qipa=noobject -qsuppress=1500-036

Fortran benchmarks:
 -qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg
 -qsuppress=1500-036

Benchmarks using both Fortran and C:
 -qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg
 -qsuppress=1500-036

Peak Compiler Invocation

C benchmarks:
 /opt/ibm/xlC/13.1.0/bin/xlC_at -qlanglvl=extc99

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 1330

IBM Power S824 (3.5 GHz, 24 core, RHEL)

SPECfp_rate_base2006 = 1130

CPU2006 license: 11

Test date: Jun-2014

Test sponsor: IBM Corporation

Hardware Availability: Jun-2014

Tested by: IBM Corporation

Software Availability: Jun-2014

Peak Compiler Invocation (Continued)

C++ benchmarks:

/opt/ibm/xlC/13.1.0/bin/xlC_at

Fortran benchmarks:

/opt/ibm/xlf/15.1.0/bin/xlf95_at

Benchmarks using both Fortran and C:

/opt/ibm/xlC/13.1.0/bin/xlC_at -qlanglvl=extc99

/opt/ibm/xlf/15.1.0/bin/xlf95_at

Peak Portability Flags

410.bwaves: -qfixed
416.gamess: -qfixed
434.zeusmp: -qfixed
435.gromacs: -qfixed -qextname
436.cactusADM: -DSPEC_CPU_LP64 -qfixed -qextname
437.leslie3d: -qfixed
454.calculix: -qfixed -qextname
481.wrf: -DNOUNDERSCORE
482.sphinx3: -qchars=signed

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: -qinline=40 -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2)
-qlargepage -O5 -qsimd=noauto -q64 -qfdpr -lhugetlbfs
-Wl,-q

482.sphinx3: -qinline=40 -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2)
-qlargepage -O5 -qsimd=noauto -qfdpr -lhugetlbfs -Wl,-q

C++ benchmarks:

444.namd: -qinline=40 -qipa=threads -qlargepage -O4 -qfdpr
-lhugetlbfs -Wl,-q

447.dealII: -qinline=40 -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2)
-qlargepage -O4 -qfdpr -qrtti -lhugetlbfs -Wl,-q

450.soplex: -qinline=40 -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2)
-qlargepage -O3 -qarch=auto -qtune=auto -qsimd
-qprefetch=dscr=147 -lhugetlbfs

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 1330

IBM Power S824 (3.5 GHz, 24 core, RHEL)

SPECfp_rate_base2006 = 1130

CPU2006 license: 11

Test date: Jun-2014

Test sponsor: IBM Corporation

Hardware Availability: Jun-2014

Tested by: IBM Corporation

Software Availability: Jun-2014

Peak Optimization Flags (Continued)

453.povray: -qinline=40 -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2)
-qlargepage -O3 -qarch=auto -qtune=auto
-qprefetch=dscr=147 -qfdpr -lhugetlbfs -Wl,-q

Fortran benchmarks:

410.bwaves: -qipa=threads -qlargepage -O5 -qsimd=noauto -qfdpr
-qsmallstack=dynlenonheap -lhugetlbfs -Wl,-q

416.gamess: -qipa=threads -qlargepage -O5 -qsimd=noauto
-qprefetch=dscr=84 -qipa=partition=large -qfdpr
-qalias=nostd -lhugetlbfs -Wl,-q

434.zeusmp: -qipa=threads -qlargepage -O4 -qsimd=noauto -q64 -qfdpr
-qxf90=nosignedzero -lhugetlbfs -Wl,-q

437.leslie3d: -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2) -qlargepage
-O5 -q64 -qfdpr -lhugetlbfs -Wl,-q
-B/opt/at7.0/share/libhugetlbfs/ -tl -Wl,--hugetlbfs-align

459.GemsFDTD: -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2) -qlargepage
-O5 -q64 -qipa=partition=large -qfdpr -lhugetlbfs -Wl,-q

465.tonto: Same as 459.GemsFDTD

Benchmarks using both Fortran and C:

435.gromacs: -qinline=40 -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2)
-qlargepage -O4 -qipa=partition=large -qfdpr -lhugetlbfs
-Wl,-q

436.cactusADM: -qinline=40 -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2)
-qlargepage -O4 -qarch=pwr7 -qtune=pwr7
-qipa=partition=large -q64 -qfdpr -lhugetlbfs -Wl,-q

454.calculix: basepeak = yes

481.wrf: -qinline=40 -qipa=threads -qlargepage -O5
-qipa=partition=large -qfdpr -lhugetlbfs -Wl,-q

Peak Other Flags

C benchmarks (except as noted below):

-qsuppress=1586-476(pass 2) -qipa=noobject -qsuppress=1500-036

433.milc: -qipa=noobject -qsuppress=1500-036

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 1330

IBM Power S824 (3.5 GHz, 24 core, RHEL)

SPECfp_rate_base2006 = 1130

CPU2006 license: 11

Test date: Jun-2014

Test sponsor: IBM Corporation

Hardware Availability: Jun-2014

Tested by: IBM Corporation

Software Availability: Jun-2014

Peak Other Flags (Continued)

C++ benchmarks (except as noted below):

-qsuppress=1586-476(pass 2) -qipa=noobject -qsuppress=1500-036

444.namd: -qipa=noobject -qsuppress=1500-036

Fortran benchmarks (except as noted below):

-qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg
-qsuppress=1500-036

437.leslie3d: -qsuppress=1586-476(pass 2) -qipa=noobject
-qsuppress=1500-010 -qsuppress=cmpmsg -qsuppress=1500-036

459.GemsFDTD: -qsuppress=1586-476(pass 2) -qipa=noobject
-qsuppress=1500-010 -qsuppress=cmpmsg -qsuppress=1500-036

465.tonto: -qsuppress=1586-476(pass 2) -qipa=noobject
-qsuppress=1500-010 -qsuppress=cmpmsg -qsuppress=1500-036

Benchmarks using both Fortran and C (except as noted below):

-qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg
-qsuppress=1500-036

435.gromacs: -qsuppress=1586-476(pass 2) -qipa=noobject
-qsuppress=1500-010 -qsuppress=cmpmsg -qsuppress=1500-036

436.cactusADM: -qsuppress=1586-476(pass 2) -qipa=noobject
-qsuppress=1500-010 -qsuppress=cmpmsg -qsuppress=1500-036

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/IBM-XL.V13L.html>
<http://www.spec.org/cpu2006/flags/IBM-Linux-V7.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/IBM-XL.V13L.xml>
<http://www.spec.org/cpu2006/flags/IBM-Linux-V7.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Fri Jul 25 00:11:25 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 1 July 2014.