



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp[®]2006 = 46.0

Huawei RH2285H V2 (Intel Xeon E5-2403)

SPECfp_base2006 = 44.6

CPU2006 license: 3175


Test date: Oct-2012

Test sponsor: Huawei

Hardware Availability: May-2012

Tested by: Huawei

Software Availability: Dec-2011

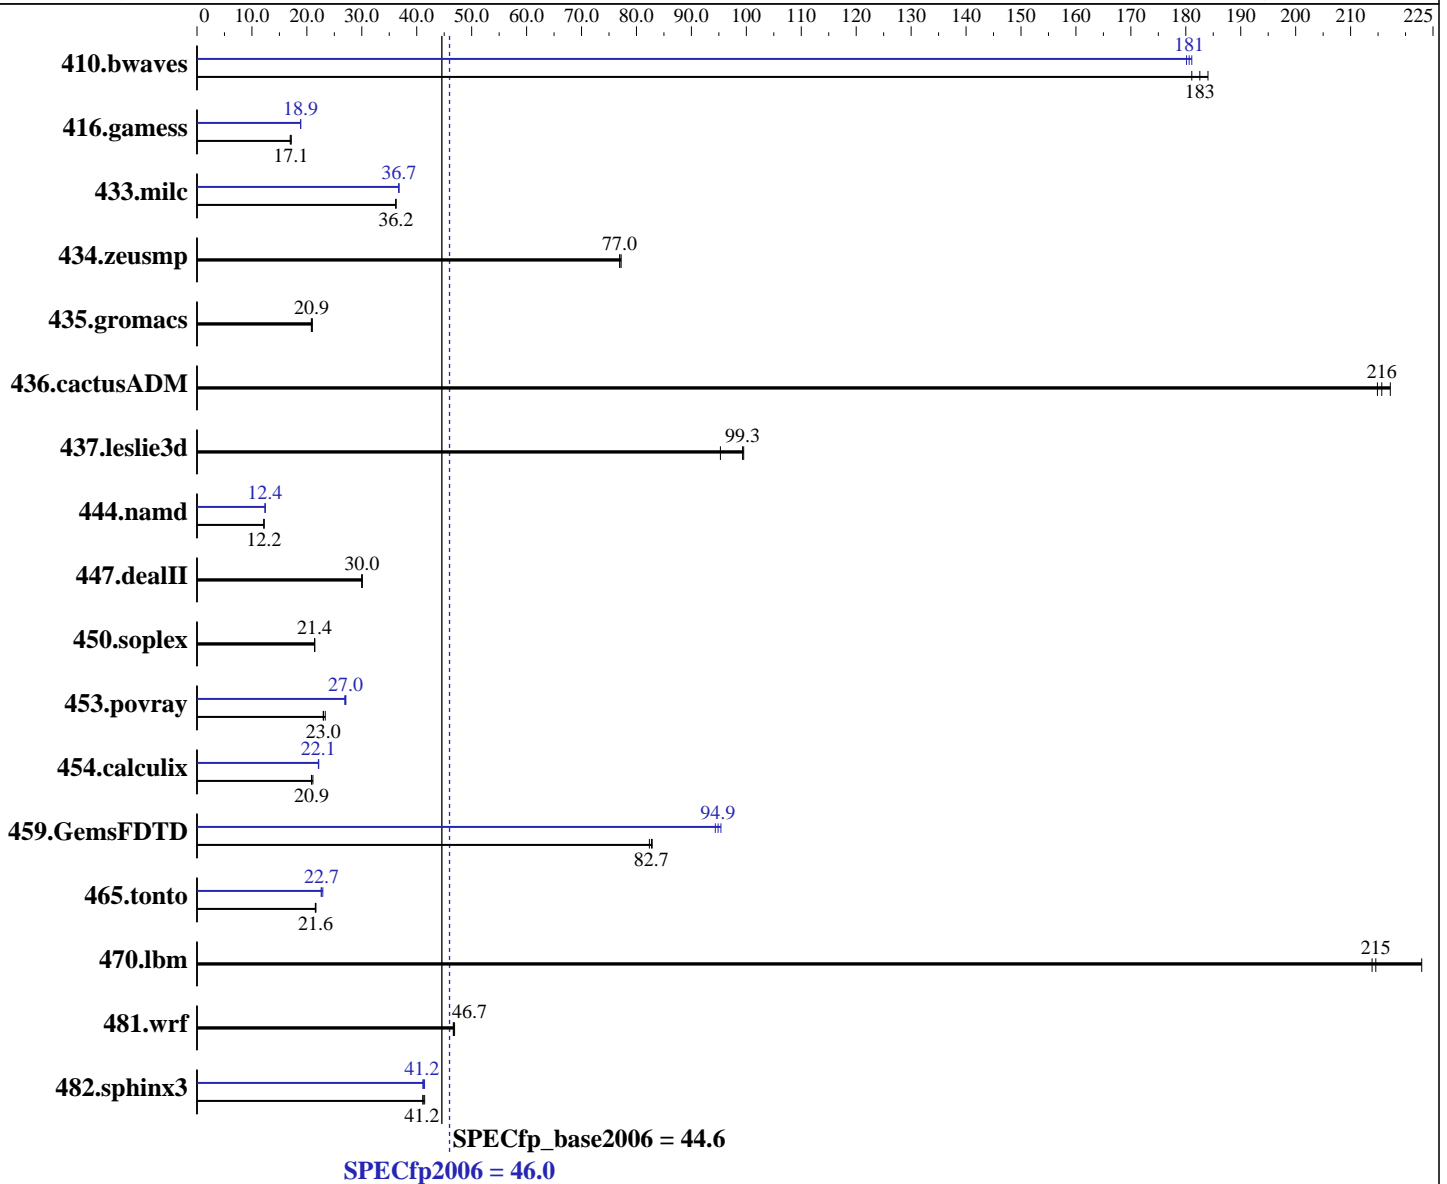

Hardware

CPU Name: Intel Xeon E5-2403
 CPU Characteristics:
 CPU MHz: 1800
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)
 2.6.32-220.el6.x86_64
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;
 Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux
 Auto Parallel: Yes
 File System: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = **46.0**

Huawei RH2285H V2 (Intel Xeon E5-2403)

SPECfp_base2006 = **44.6**

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Oct-2012

Hardware Availability: May-2012

Software Availability: Dec-2011

L3 Cache: 10 MB I+D on chip per chip
 Other Cache: None
 Memory: 48 GB (12 x 4 GB 1Rx4 PC3-10600R-11, ECC, running at 1067 MHz and CL7)
 Disk Subsystem: 1 x 300 GB SAS, 10K RPM
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	75.0	181	73.8	184	74.4	183	75.4	180	75.2	181	75.0	181
416.gamess	1144	17.1	1154	17.0	1143	17.1	1037	18.9	1039	18.8	1037	18.9
433.milc	254	36.2	254	36.2	253	36.2	250	36.8	250	36.7	250	36.7
434.zeusmp	118	77.0	118	77.0	118	77.2	118	77.0	118	77.0	118	77.2
435.gromacs	343	20.8	342	20.9	340	21.0	343	20.8	342	20.9	340	21.0
436.cactusADM	55.6	215	55.0	217	55.4	216	55.6	215	55.0	217	55.4	216
437.leslie3d	98.7	95.3	94.5	99.5	94.7	99.3	98.7	95.3	94.5	99.5	94.7	99.3
444.namd	658	12.2	658	12.2	658	12.2	647	12.4	646	12.4	646	12.4
447.dealII	380	30.1	381	30.0	381	30.0	380	30.1	381	30.0	381	30.0
450.soplex	389	21.4	389	21.4	390	21.4	389	21.4	389	21.4	390	21.4
453.povray	231	23.0	231	23.0	228	23.3	198	26.9	197	27.0	196	27.1
454.calculix	395	20.9	391	21.1	396	20.8	372	22.2	373	22.1	373	22.1
459.GemsFDTD	129	82.3	128	82.9	128	82.7	112	94.9	112	94.4	111	95.4
465.tonto	457	21.5	455	21.6	455	21.6	430	22.9	435	22.6	434	22.7
470.lbm	64.2	214	61.6	223	64.0	215	64.2	214	61.6	223	64.0	215
481.wrf	239	46.7	239	46.7	238	46.9	239	46.7	239	46.7	238	46.9
482.sphinx3	470	41.4	473	41.2	474	41.1	474	41.1	473	41.2	471	41.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
 Select only test related files when installing the operating system

Platform Notes

BIOS configuration:
 Intel Hyper-Threading set to Disabled
 Set Power Efficiency Mode to Performance
 Sysinfo program /spec/config/sysinfo.rev6800
 \$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3
 running on RH62-yjp2 Mon Oct 15 18:46:15 2012

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 46.0

Huawei RH2285H V2 (Intel Xeon E5-2403)

SPECfp_base2006 = 44.6

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Oct-2012

Hardware Availability: May-2012

Software Availability: Dec-2011

Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) CPU E5-2403 0 @ 1.80GHz
 2 "physical id"s (chips)
 8 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores      : 4
siblings       : 4
physical 0:    : cores 0 1 2 3
physical 1:    : cores 0 1 2 3
cache size     : 10240 KB
```

From /proc/meminfo

```
MemTotal:      49403792 kB
HugePages_Total: 0
Hugepagesize:   2048 kB
```

From /etc/*release* /etc/*version*

```
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

uname -a:

```
Linux RH62-yjp2 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13 EST 2011
x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Oct 15 08:41

SPEC is set to: /spec

```
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sdal        ext3      270G  44G  212G  18% /
```

Additional information from dmidecode:

```
Memory:
 12x Samsu M393B 4 GB 1333 MHz 1 rank
```

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

```
KMP_AFFINITY = "granularity=fine,compact,0,1"
LD_LIBRARY_PATH = "/spec/libs/32:/spec/libs/64"
OMP_NUM_THREADS = "8"
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 46.0

Huawei RH2285H V2 (Intel Xeon E5-2403)

SPECfp_base2006 = 44.6

CPU2006 license: 3175

Test date: Oct-2012

Test sponsor: Huawei

Hardware Availability: May-2012

Tested by: Huawei

Software Availability: Dec-2011

General Notes (Continued)

Binaries compiled on a system with 2 x Xeon X5645 CPU + 16GB memory using RHEL 6.1

The Huawei RH2285 v2 and Huawei RH2285H v2 models are electronically equivalent.

The results have been measured on a Huawei RH2285 v2 model

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.deallI: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 46.0

Huawei RH2285H V2 (Intel Xeon E5-2403)

SPECfp_base2006 = 44.6

CPU2006 license: 3175

Test date: Oct-2012

Test sponsor: Huawei

Hardware Availability: May-2012

Tested by: Huawei

Software Availability: Dec-2011

Base Optimization Flags (Continued)

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
-ansi-alias

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll2 -ansi-alias
-parallel

C++ benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 46.0

Huawei RH2285H V2 (Intel Xeon E5-2403)

SPECfp_base2006 = 44.6

CPU2006 license: 3175

Test date: Oct-2012

Test sponsor: Huawei

Hardware Availability: May-2012

Tested by: Huawei

Software Availability: Dec-2011

Peak Optimization Flags (Continued)

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -parallel
-static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-revE.20121120.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-revE.20121120.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 46.0

Huawei RH2285H V2 (Intel Xeon E5-2403)

SPECfp_base2006 = 44.6

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Oct-2012

Hardware Availability: May-2012

Software Availability: Dec-2011

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Fri Jul 25 00:31:07 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 15 July 2014.