



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS F2A85-M PRO motherboard (AMD A10-6700 APU with Radeon HD Graphics)

SPECint®2006 = 32.0

SPECint_base2006 = 29.7

CPU2006 license: 13


Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jan-2014

Hardware Availability: Aug-2013

Software Availability: Apr-2013

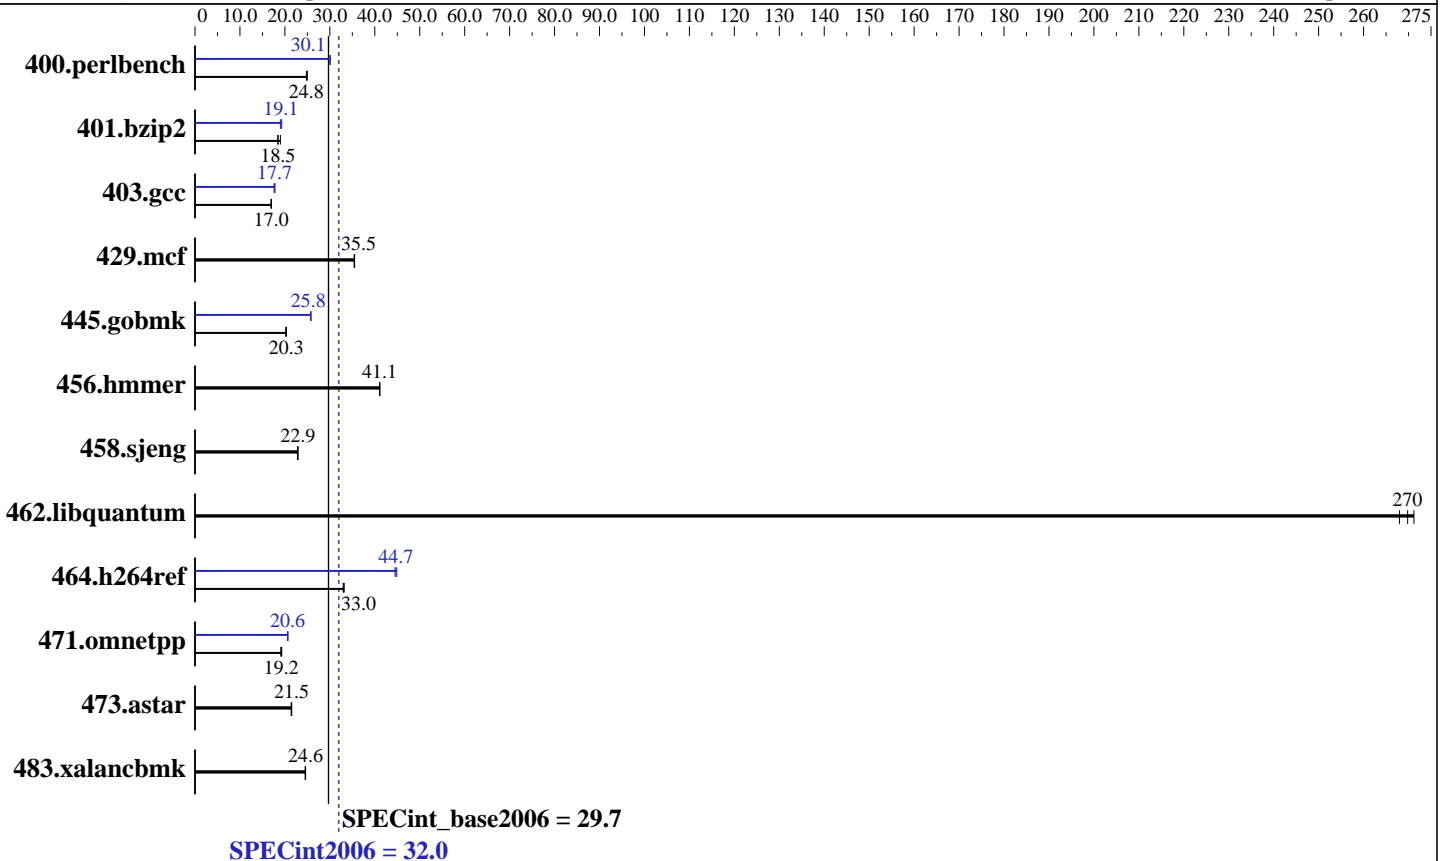

Hardware

CPU Name: AMD A10-6700
 CPU Characteristics: AMD Turbo CORE technology up to 4.30 GHz
 CPU MHz: 3700
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 128 KB I on chip per chip, 64 KB I shared / 2 cores; 16 KB D on chip per core
 Secondary Cache: 4 MB I+D on chip per chip, 2 MB shared / 2 cores
 L3 Cache: None
 Other Cache: None
 Memory: 4 GB (2 x 2 GB 1Rx8 PC3-12800U-11)
 Disk Subsystem: 250 GB Seagate SATA HDD, 7200 RPM
 Other Hardware: None

Software

Operating System: Microsoft Windows 7 Enterprise 6.1.7601 Service Pack 1 Build 7601
 Compiler: C/C++: Version 13.1.1.171 of Intel C++ Studio XE for Windows;
 Libraries: Version 16.00.30319.01 of Microsoft Visual Studio 2010 Professional SP1
 Auto Parallel: Yes
 File System: NTFS
 System State: Default
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: SmartHeap Library Version 10.0 from <http://www.microquill.com/>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS F2A85-M PRO motherboard (AMD A10-6700 APU with Radeon HD Graphics)

SPECint2006 = 32.0

SPECint_base2006 = 29.7

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jan-2014

Hardware Availability: Aug-2013

Software Availability: Apr-2013

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	394	24.8	390	25.0	394	24.8	326	30.0	325	30.1	325	30.1
401.bzip2	507	19.0	523	18.5	526	18.4	500	19.3	504	19.1	508	19.0
403.gcc	476	16.9	475	17.0	474	17.0	453	17.8	457	17.6	455	17.7
429.mcf	257	35.4	257	35.5	257	35.5	257	35.4	257	35.5	257	35.5
445.gobmk	518	20.2	517	20.3	517	20.3	407	25.8	409	25.7	407	25.8
456.hammer	227	41.1	227	41.1	227	41.1	227	41.1	227	41.1	227	41.1
458.sjeng	528	22.9	530	22.8	529	22.9	528	22.9	530	22.8	529	22.9
462.libquantum	76.8	270	76.4	271	77.3	268	76.8	270	76.4	271	77.3	268
464.h264ref	670	33.0	667	33.2	670	33.0	495	44.7	493	44.9	497	44.5
471.omnetpp	324	19.3	325	19.2	326	19.1	303	20.7	303	20.6	304	20.6
473.astar	326	21.5	327	21.5	327	21.4	326	21.5	327	21.5	327	21.4
483.xalancbmk	280	24.6	282	24.5	281	24.6	280	24.6	282	24.5	281	24.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

To compile these binaries, the Intel Compiler 13.1 was set up to generate 64-bit binaries with the command:
"ipsxe-comp-vars.bat intel64 vs2010" (shortcut provided in the Intel(r) Parallel Studio XE 2013 program folder)

Platform Notes

Sysinfo program C:\SPEC13.1\Docs\sysinfo
\$Rev: 6775 \$ \$Date:: 2011-08-16 #\$ \8787f7622badcf24e01c368b1db4377c
running on F2A85MPRO Sat Jan 18 10:35:43 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
Trying 'systeminfo'
OS Name       : Microsoft Windows 7 Enterprise
OS Version    : 6.1.7601 Service Pack 1 Build 7601
System Manufacturer: System manufacturer
System Model   : System Product Name
Processor(s)  : 1 Processor(s) Installed.
               [01]: AMD64 Family 21 Model 19 Stepping 1 AuthenticAMD ~3700 Mhz
BIOS Version  : American Megatrends Inc. 6303, 8/13/2013
Total Physical Memory: 3,271 MB
```

```
Trying 'wmic cpu get /value'
DeviceID      : CPU0
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS F2A85-M PRO motherboard (AMD A10-6700 APU with Radeon HD Graphics)

SPECint2006 = 32.0

SPECint_base2006 = 29.7

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jan-2014

Hardware Availability: Aug-2013

Software Availability: Apr-2013

Platform Notes (Continued)

L2CacheSize : 4096
L3CacheSize : 0
MaxClockSpeed : 3700
Name : AMD A10-6700 APU with Radeon(tm) HD Graphics
NumberOfCores : 2
NumberOfLogicalProcessors: 4

(End of data from sysinfo program)

Component Notes

Tested systems can be used with Shin-G ATX case,
PC Power and Cooling 1200W power supply
Micron MT8JTF25664AZ-1G6 Series Memory DIMMs

General Notes

OMP_NUM_THREADS set to number of processors cores
KMP_AFFINITY set to granularity=fine,scatter
Binaries compiled on a system with 1x Intel Core i7-860 CPU
+ 8GB memory using Windows 7 Enterprise 64-bit

Base Compiler Invocation

C benchmarks:

icl -Qvc10 -Qstd=c99

C++ benchmarks:

icl -Qvc10

Base Portability Flags

400.perlbench: -DSPEC_CPU_P64 -DSPEC_CPU_WIN64_X64
-DSPEC_CPU_NO_NEED_VA_COPY
401.bzip2: -DSPEC_CPU_P64
403.gcc: -DSPEC_CPU_P64 -DSPEC_CPU_WIN64
429.mcf: -DSPEC_CPU_P64
445.gobmk: -DSPEC_CPU_P64
456.hmmer: -DSPEC_CPU_P64
458.sjeng: -DSPEC_CPU_P64
462.libquantum: -DSPEC_CPU_P64
464.h264ref: -DSPEC_CPU_P64 -DWIN32 -DSPEC_CPU_NO_INTTYPES
471.omnetpp: -DSPEC_CPU_P64 -DSPEC_CPU_WIN64
473.astar: -DSPEC_CPU_P64
483.xalanbmk: -DSPEC_CPU_P64 -Qoption, cpp, --no_wchar_t_keyword



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS F2A85-M PRO motherboard (AMD A10-6700 APU with Radeon HD Graphics)

SPECint2006 = 32.0

SPECint_base2006 = 29.7

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jan-2014

Hardware Availability: Aug-2013

Software Availability: Apr-2013

Base Optimization Flags

C benchmarks:

```
/arch:AVX -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qparallel
-Qauto-ilp32 /F512000000
```

C++ benchmarks:

```
/arch:AVX -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qcxx-features
-Qauto-ilp32 /F512000000 shlw64M.lib -link /FORCE:MULTIPLE
```

Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

Peak Compiler Invocation

C benchmarks:

```
icl -Qvc10 -Qstd=c99
```

C++ benchmarks:

```
icl -Qvc10
```

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
400.perlbench: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
-Qauto-ilp32 /F512000000 shlw64M.lib
-link /FORCE:MULTIPLE
```

```
401.bzip2: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qopt-prefetch -Qansi-alias
-Qauto-ilp32 /F512000000
```

```
403.gcc: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qauto-ilp32 /F512000000
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS F2A85-M PRO motherboard (AMD A10-6700 APU with Radeon HD Graphics)

SPECint2006 = 32.0

SPECint_base2006 = 29.7

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jan-2014

Hardware Availability: Aug-2013

Software Availability: Apr-2013

Peak Optimization Flags (Continued)

429.mcf: basepeak = yes

445.gobmk: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O2 -Qprec-div- -Qansi-alias -Qauto-ilp32
/F512000000

456.hmmer: basepeak = yes

458.sjeng: basepeak = yes

462.libquantum: basepeak = yes

464.h264ref: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll2 -Qansi-alias
-Qauto-ilp32 /F512000000

C++ benchmarks:

471.omnetpp: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qansi-alias
-Qopt-ra-region-strategy=block -Qauto-ilp32 /F512000000
shlW64M.lib -link /FORCE:MULTIPLE

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic13.1-official-windows.20130924.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic13.1-official-windows.20130924.xml>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS F2A85-M PRO motherboard (AMD A10-6700 APU with Radeon HD Graphics)

SPECint2006 = 32.0

SPECint_base2006 = 29.7

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jan-2014

Hardware Availability: Aug-2013

Software Availability: Apr-2013

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Aug 12 15:06:22 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 15 July 2014.