



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

**SPECfp®2006 = 65.7**

Huawei CH240 (Intel Xeon E5-4603 v2)

**SPECfp\_base2006 = 63.8**

CPU2006 license: 3175


Test date: Jul-2014

Test sponsor: Huawei

Hardware Availability: Mar-2014

Tested by: Huawei

Software Availability: Nov-2013

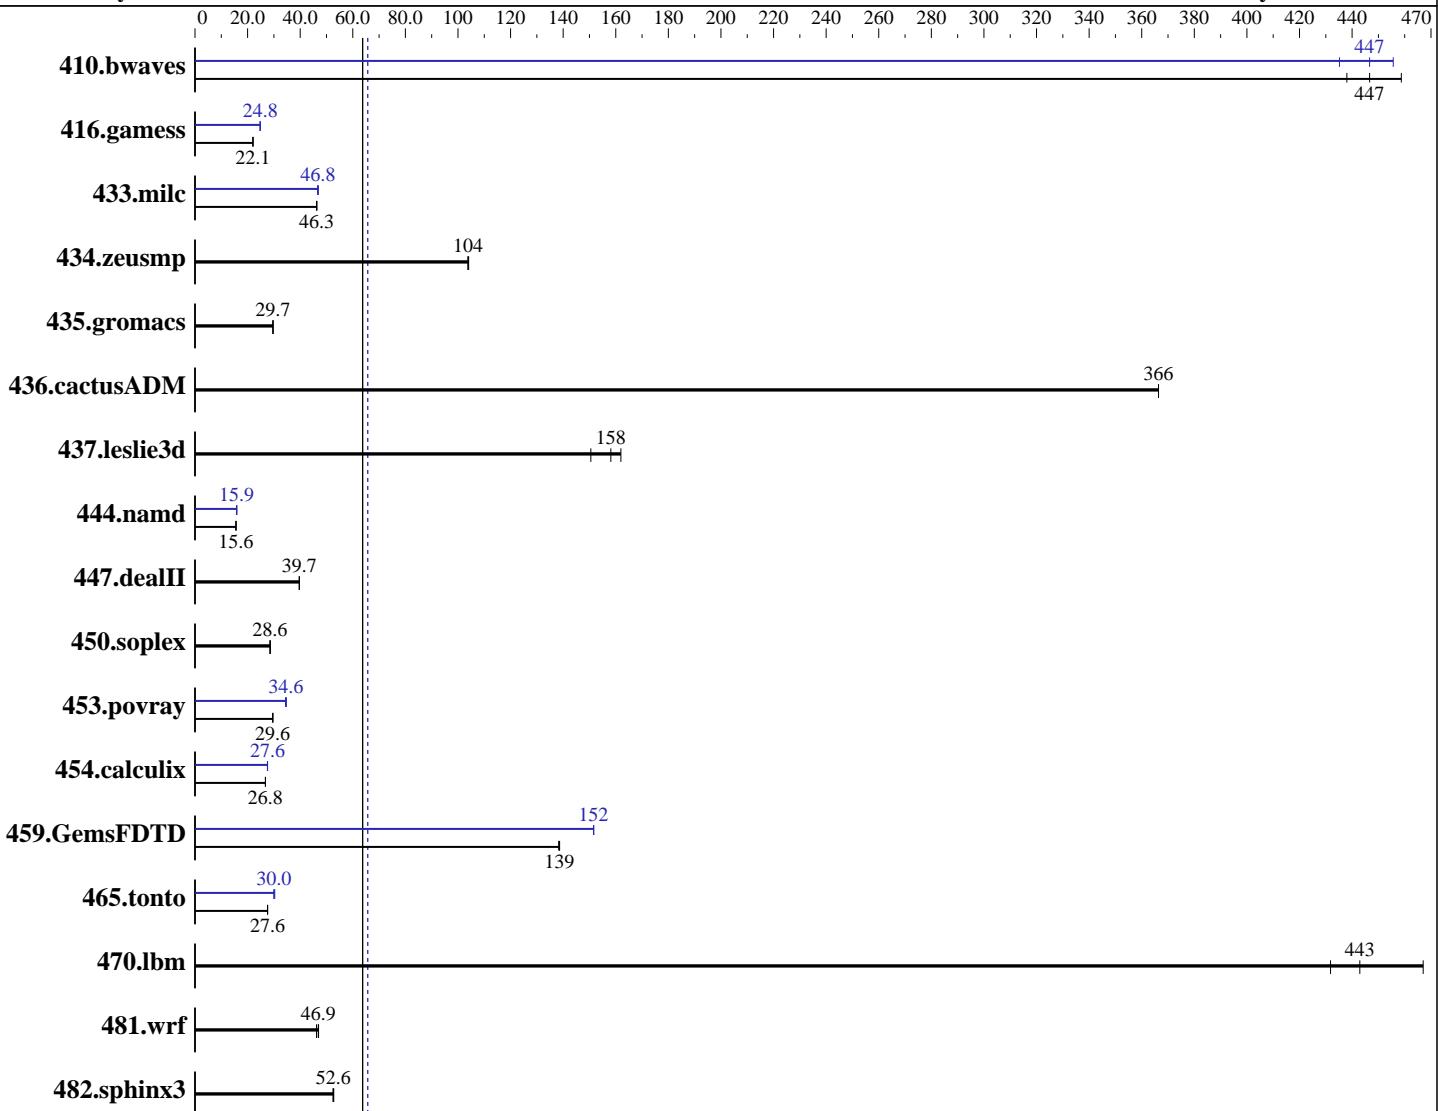

**SPECfp\_base2006 = 63.8**

**SPECfp2006 = 65.7**

## Hardware

CPU Name:	Intel Xeon E5-4603 v2
CPU Characteristics:	
CPU MHz:	2200
FPU:	Integrated
CPU(s) enabled:	16 cores, 4 chips, 4 cores/chip
CPU(s) orderable:	2,4 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

## Software

Operating System:	Red Hat Enterprise Linux Server release 6.5 (Santiago) 2.6.32-431.el6.x86_64
Compiler:	C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux; Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux
Auto Parallel:	Yes
File System:	ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

**SPECfp2006 = 65.7**

Huawei CH240 (Intel Xeon E5-4603 v2)

**SPECfp\_base2006 = 63.8**

CPU2006 license: 3175

Test date: Jul-2014

Test sponsor: Huawei

Hardware Availability: Mar-2014

Tested by: Huawei

Software Availability: Nov-2013

L3 Cache: 10 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (32 x 8 GB 2Rx4 PC3-10600R-09 ,ECC)  
 Disk Subsystem: 1 x 300 GB SAS, 10000 RPM  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio										
410.bwaves	<b>30.4</b>	<b>447</b>	31.0	438	29.6	459	<b>31.2</b>	<b>435</b>	<b>30.4</b>	<b>447</b>	29.8	456
416.gamess	888	22.1	<b>888</b>	<b>22.1</b>	889	22.0	<b>789</b>	24.8	<b>790</b>	24.8	<b>790</b>	<b>24.8</b>
433.milc	198	46.3	198	46.3	<b>198</b>	<b>46.3</b>	197	46.6	<b>196</b>	<b>46.8</b>	196	46.9
434.zeusmp	<b>87.6</b>	<b>104</b>	87.4	104	87.6	104	<b>87.6</b>	<b>104</b>	87.4	104	87.6	104
435.gromacs	<b>241</b>	<b>29.7</b>	241	29.6	241	29.7	<b>241</b>	<b>29.7</b>	241	29.6	241	29.7
436.cactusADM	32.6	366	32.6	366	<b>32.6</b>	<b>366</b>	32.6	366	32.6	366	<b>32.6</b>	<b>366</b>
437.leslie3d	62.4	151	58.0	162	<b>59.4</b>	<b>158</b>	62.4	151	58.0	162	<b>59.4</b>	<b>158</b>
444.namd	514	15.6	514	15.6	<b>514</b>	<b>15.6</b>	506	15.9	506	15.9	<b>506</b>	<b>15.9</b>
447.dealII	288	39.7	<b>288</b>	<b>39.7</b>	288	39.7	288	39.7	<b>288</b>	<b>39.7</b>	288	39.7
450.soplex	292	28.6	292	28.6	<b>292</b>	<b>28.6</b>	292	28.6	292	28.6	<b>292</b>	<b>28.6</b>
453.povray	<b>180</b>	<b>29.6</b>	180	29.6	180	29.6	<b>153</b>	34.7	<b>155</b>	34.4	<b>154</b>	<b>34.6</b>
454.calculix	308	26.8	308	26.8	<b>308</b>	<b>26.8</b>	299	27.6	<b>299</b>	<b>27.6</b>	300	27.5
459.GemsFDTD	76.5	139	<b>76.5</b>	<b>139</b>	76.7	138	70.0	152	70.0	152	<b>70.0</b>	<b>152</b>
465.tonto	357	27.6	356	27.6	<b>357</b>	<b>27.6</b>	<b>328</b>	<b>30.0</b>	328	30.0	325	30.3
470.lbm	31.8	432	29.4	467	<b>31.0</b>	<b>443</b>	31.8	432	29.4	467	<b>31.0</b>	<b>443</b>
481.wrf	<b>238</b>	<b>46.9</b>	242	46.2	238	47.0	<b>238</b>	<b>46.9</b>	242	46.2	238	47.0
482.sphinx3	369	52.8	371	52.5	<b>371</b>	<b>52.6</b>	<b>369</b>	<b>52.8</b>	<b>371</b>	<b>52.5</b>	<b>371</b>	<b>52.6</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS configuration:

Set Intel HT Technology Disable

Sysinfo program /spec/config/sysinfo.rev6800

\$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3  
running on localhost.localdomain Fri Jul 4 00:47:13 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

**SPECfp2006 = 65.7**

Huawei CH240 (Intel Xeon E5-4603 v2)

**SPECfp\_base2006 = 63.8**

CPU2006 license: 3175

Test date: Jul-2014

Test sponsor: Huawei

Hardware Availability: Mar-2014

Tested by: Huawei

Software Availability: Nov-2013

## Platform Notes (Continued)

```
From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E5-4603 v2 @ 2.20GHz
        4 "physical id"s (chips)
        16 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
    cpu cores : 4
    siblings   : 4
    physical 0: cores 0 1 2 3
    physical 1: cores 0 1 2 3
    physical 2: cores 0 1 2 3
    physical 3: cores 0 1 2 3
cache size : 10240 KB
```

```
From /proc/meminfo
MemTotal:      264479480 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.5 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux localhost.localdomain 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54
EST 2013 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jul 3 15:43
```

```
SPEC is set to: /spec
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda1        ext4  268G   73G  182G  29%  /
```

Additional information from dmidecode:

```
Memory:
7x Hynix HMT31GR7AFR4C-H9 8 GB 1333 MHz 2 rank
25x Hynix HMT31GR7BFR4C-H9 8 GB 1333 MHz 2 rank
```

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact,0,1"  
LD\_LIBRARY\_PATH = "/spec/libs/32:/spec/libs/64"  
OMP\_NUM\_THREADS = "16"

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Huawei**

**SPECfp2006 = 65.7**

**Huawei CH240 (Intel Xeon E5-4603 v2)**

**SPECfp\_base2006 = 63.8**

**CPU2006 license:** 3175

**Test date:** Jul-2014

**Test sponsor:** Huawei

**Hardware Availability:** Mar-2014

**Tested by:** Huawei

**Software Availability:** Nov-2013

## General Notes (Continued)

Binaries compiled on a system with 2 x Xeon X5645 CPU + 16GB memory using RHEL 6.1

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

## Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

## Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
  433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
  437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
  447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
  465.tonto: -DSPEC_CPU_LP64
  470.lbm: -DSPEC_CPU_LP64
  481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

**SPECfp2006 = 65.7**

Huawei CH240 (Intel Xeon E5-4603 v2)

**SPECfp\_base2006 = 63.8**

CPU2006 license: 3175

Test date: Jul-2014

Test sponsor: Huawei

Hardware Availability: Mar-2014

Tested by: Huawei

Software Availability: Nov-2013

## Base Optimization Flags (Continued)

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
-ansi-alias

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

**SPECfp2006 = 65.7**

Huawei CH240 (Intel Xeon E5-4603 v2)

**SPECfp\_base2006 = 63.8**

**CPU2006 license:** 3175

**Test date:** Jul-2014

**Test sponsor:** Huawei

**Hardware Availability:** Mar-2014

**Tested by:** Huawei

**Software Availability:** Nov-2013

## Peak Optimization Flags (Continued)

447.deallII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -parallel  
-static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll12  
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll12  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120912.html>  
<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120912.xml>  
<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

**SPECfp2006 = 65.7**

Huawei CH240 (Intel Xeon E5-4603 v2)

**SPECfp\_base2006 = 63.8**

**CPU2006 license:** 3175

**Test date:** Jul-2014

**Test sponsor:** Huawei

**Hardware Availability:** Mar-2014

**Tested by:** Huawei

**Software Availability:** Nov-2013

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Mon Aug 4 15:10:28 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 4 August 2014.