



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS A88X-PRO Motherboard (AMD A10-7700K APU with Radeon R7 Graphics)

SPECfp®2006 = 35.1

SPECfp_base2006 = 34.1

CPU2006 license: 13


Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jul-2014

Hardware Availability: Jan-2014

Software Availability: Oct-2013

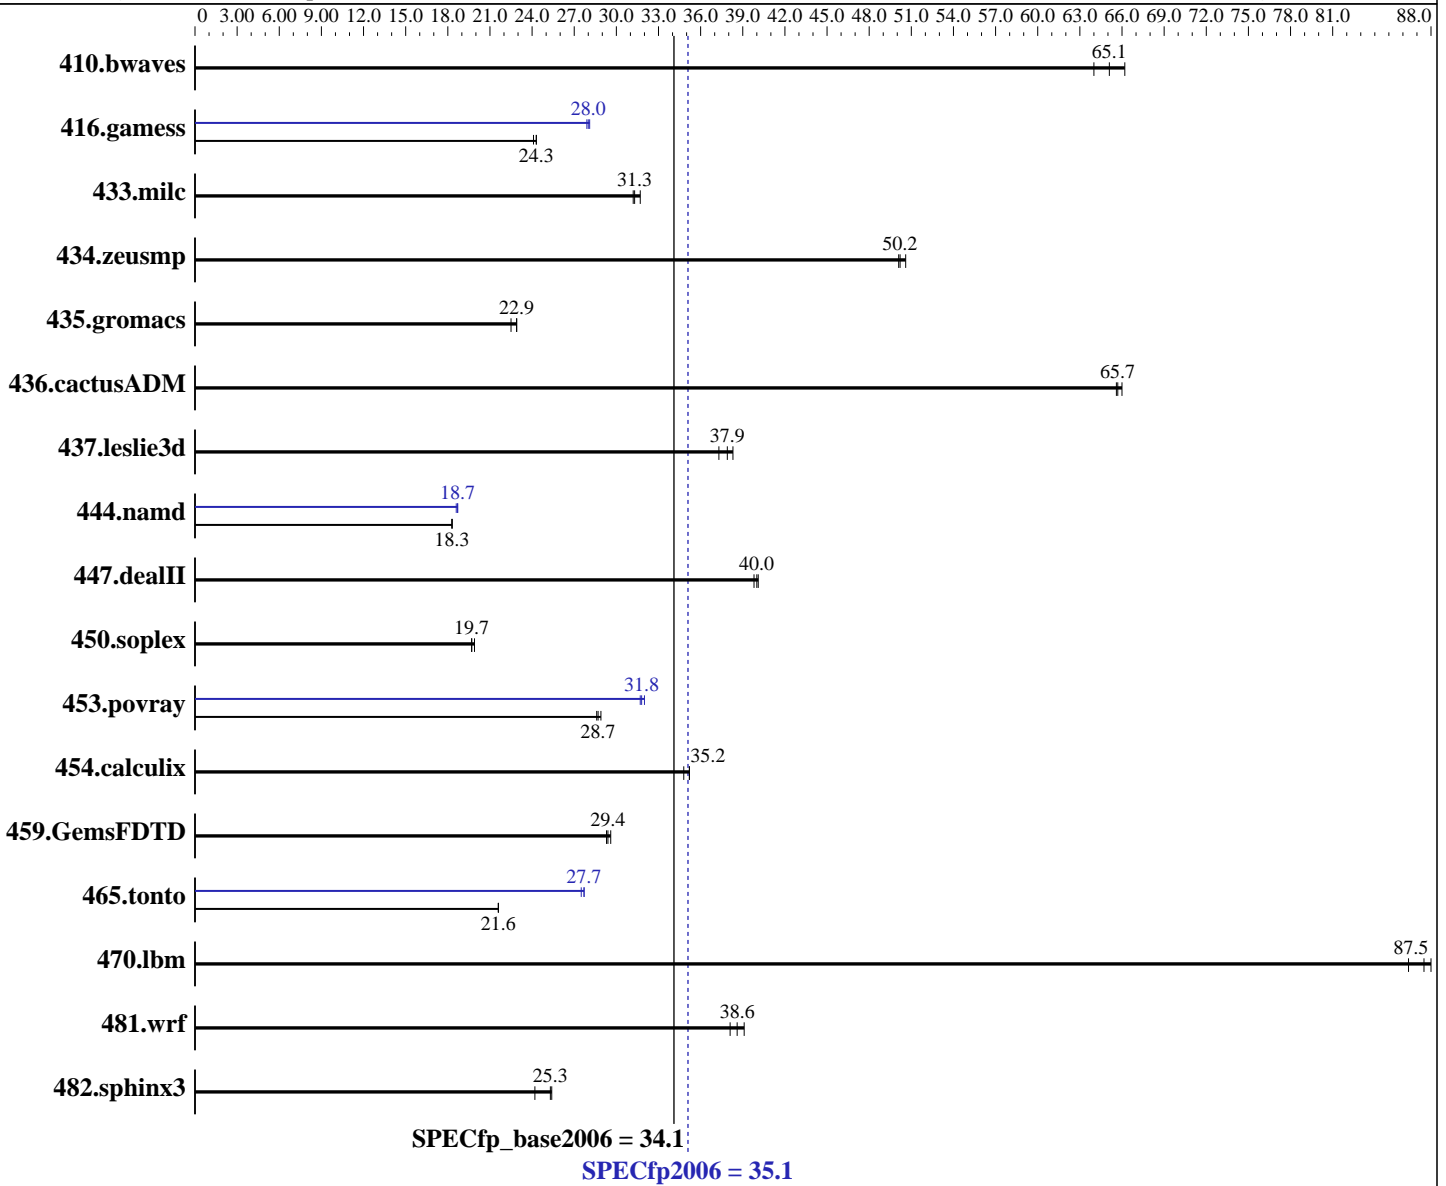

Hardware

CPU Name: AMD A10-7700K
 CPU Characteristics: AMD Turbo CORE technology up to 3.80 GHz
 CPU MHz: 3400
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 192 KB I on chip per chip, 96 KB I shared / 2 cores; 16 KB D on chip per core
 Secondary Cache: 4 MB I+D on chip per chip, 2 MB shared / 2 cores

Continued on next page

Software

Operating System: Microsoft Windows 8.1 Pro
 6.3.9600 N/A Build 9600
 Compiler: C/C++: Version 14.0.1.139 of Intel C++ Studio XE for Windows;
 Fortran: Version 14.0.1.139 of Intel Fortran Studio XE for Windows;
 Libraries: Version 16.00.30319.01 of Microsoft Visual Studio 2010 Professional SP1
 Auto Parallel: Yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS A88X-PRO Motherboard (AMD A10-7700K APU with Radeon R7 Graphics)

SPECfp2006 = 35.1

SPECfp_base2006 = 34.1

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jul-2014

Hardware Availability: Jan-2014

Software Availability: Oct-2013

L3 Cache: None
Other Cache: None
Memory: 8 GB (2 x 4 GB 2Rx4 PC3-12800U-11)
Disk Subsystem: 1 TB Seagate SATA HDD, 7200 RPM
Other Hardware: None

File System: NTFS
System State: Default
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: SmartHeap Library Version 10.0 from <http://www.microquill.com/>

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	205	66.2	212	64.0	<u>209</u>	<u>65.1</u>	205	66.2	212	64.0	<u>209</u>	<u>65.1</u>
416.gamess	<u>806</u>	<u>24.3</u>	805	24.3	813	24.1	701	27.9	696	28.1	<u>699</u>	<u>28.0</u>
433.milc	290	31.7	295	31.2	<u>293</u>	<u>31.3</u>	290	31.7	295	31.2	<u>293</u>	<u>31.3</u>
434.zeusmp	<u>181</u>	<u>50.2</u>	182	50.1	180	50.6	<u>181</u>	<u>50.2</u>	182	50.1	180	50.6
435.gromacs	317	22.5	312	22.9	<u>312</u>	<u>22.9</u>	317	22.5	312	22.9	<u>312</u>	<u>22.9</u>
436.cactusADM	181	66.0	182	65.6	<u>182</u>	<u>65.7</u>	181	66.0	182	65.6	<u>182</u>	<u>65.7</u>
437.leslie3d	246	38.3	<u>248</u>	<u>37.9</u>	252	37.3	246	38.3	<u>248</u>	<u>37.9</u>	252	37.3
444.namd	439	18.3	<u>438</u>	<u>18.3</u>	438	18.3	430	18.6	<u>430</u>	<u>18.7</u>	430	18.7
447.dealII	<u>286</u>	<u>40.0</u>	286	40.1	288	39.8	<u>286</u>	<u>40.0</u>	286	40.1	288	39.8
450.soplex	423	19.7	419	19.9	<u>422</u>	<u>19.7</u>	423	19.7	419	19.9	<u>422</u>	<u>19.7</u>
453.povray	<u>185</u>	<u>28.7</u>	184	28.9	186	28.6	168	31.7	<u>168</u>	<u>31.8</u>	167	32.0
454.calculix	237	34.8	234	35.2	<u>234</u>	<u>35.2</u>	237	34.8	234	35.2	<u>234</u>	<u>35.2</u>
459.GemsFDTD	<u>360</u>	<u>29.4</u>	362	29.3	359	29.6	<u>360</u>	<u>29.4</u>	362	29.3	359	29.6
465.tonto	455	21.6	<u>455</u>	<u>21.6</u>	455	21.6	355	27.7	<u>356</u>	<u>27.7</u>	358	27.5
470.lbm	159	86.4	156	88.0	<u>157</u>	<u>87.5</u>	159	86.4	156	88.0	<u>157</u>	<u>87.5</u>
481.wrf	286	39.1	293	38.1	<u>289</u>	<u>38.6</u>	286	39.1	293	38.1	<u>289</u>	<u>38.6</u>
482.sphinx3	<u>771</u>	<u>25.3</u>	766	25.4	805	24.2	<u>771</u>	<u>25.3</u>	766	25.4	805	24.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

To compile these binaries, the Intel Compiler 14.0 was set up to generate 64-bit binaries with the command:
"ipsxe-comp-vars.bat intel64 vs2010" (shortcut provided in the Intel(r) Parallel Studio XE 2013 program folder)

Platform Notes

Sysinfo program C:\SPEC14.0\Docs\sysinfo
\$Rev: 6775 \$ \$Date:: 2011-08-16 #\$ \8787f7622badcf24e01c368b1db4377c
running on CltD850E6BC6EA4 Tue Jul 1 02:21:24 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS A88X-PRO Motherboard (AMD A10-7700K APU with Radeon R7 Graphics)

SPECfp2006 = 35.1

SPECfp_base2006 = 34.1

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jul-2014

Hardware Availability: Jan-2014

Software Availability: Oct-2013

Platform Notes (Continued)

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

Trying 'systeminfo'

```
OS Name       : Microsoft Windows 8.1 Pro
OS Version    : 6.3.9600 N/A Build 9600
System Manufacturer: System manufacturer
System Model   : System Product Name
Processor(s)  : 1 Processor(s) Installed.
               [01]: AMD64 Family 21 Model 48 Stepping 1 AuthenticAMD ~3400 Mhz
BIOS Version  : American Megatrends Inc. 0703, 12/30/2013
Total Physical Memory: 7,106 MB
```

Trying 'wmic cpu get /value'

```
DeviceID      : CPU0
L2CacheSize   : 4096
L3CacheSize   : 0
MaxClockSpeed : 3400
Name          : AMD A10-7700K APU with Radeon(TM) R7 Graphics
NumberOfCores : 2
NumberOfLogicalProcessors: 4
```

(End of data from sysinfo program)

Component Notes

Tested systems can be used with Shin-G ATX case,
PC Power and Cooling 1200W power supply

General Notes

OMP_NUM_THREADS set to number of processors cores
KMP_AFFINITY set to granularity=fine,scatter
Binaries compiled on a system with 1x Intel Core i7-860 CPU
+ 8GB memory using Windows 7 Enterprise 64-bit

Base Compiler Invocation

C benchmarks:

```
icl -Qvc10 -Qstd=c99
```

C++ benchmarks:

```
icl -Qvc10
```

Fortran benchmarks:

```
ifort
```

Benchmarks using both Fortran and C:

```
icl -Qvc10 -Qstd=c99 ifort
```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS A88X-PRO Motherboard (AMD A10-7700K APU with Radeon R7 Graphics)

SPECfp2006 = 35.1

SPECfp_base2006 = 34.1

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jul-2014

Hardware Availability: Jan-2014

Software Availability: Oct-2013

Base Portability Flags

```

410.bwaves: -DSPEC_CPU_P64
416.gamess: -DSPEC_CPU_P64
433.milc: -DSPEC_CPU_P64
434.zeusmp: -DSPEC_CPU_P64
435.gromacs: -DSPEC_CPU_P64
436.cactusADM: -DSPEC_CPU_P64 -names:lowercase /assume:underscore
437.leslie3d: -DSPEC_CPU_P64
444.namd: -DSPEC_CPU_P64 /TP
447.dealII: -DSPEC_CPU_P64 -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
-Qoption,cpp,--ms_incompat_treatment_of_commas_in_macros
450.soplex: -DSPEC_CPU_P64
453.povray: -DSPEC_CPU_P64 -DSPEC_CPU_NEED_INVHYP -DNEED_INVHYP
454.calculix: -DSPEC_CPU_P64 -DSPEC_CPU_NOZMODIFIER -names:lowercase
459.GemsFDTD: -DSPEC_CPU_P64
465.tonto: -DSPEC_CPU_P64
470.lbm: -DSPEC_CPU_P64
481.wrf: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
482.sphinx3: -DSPEC_CPU_P64

```

Base Optimization Flags

C benchmarks:

```

/arch:AVX -Qipo -O3 -Qprec-div- -Qparallel -Qansi-alias
-Qopt-prefetch -Qauto-ilp32 /F1000000000

```

C++ benchmarks:

```

/arch:AVX -Qipo -O3 -Qprec-div- -Qparallel -Qansi-alias
-Qopt-prefetch -Qcxx-features -Qauto-ilp32 /F1000000000 shlw64M.lib
-link /FORCE:MULTIPLE

```

Fortran benchmarks:

```

/arch:AVX -Qipo -O3 -Qprec-div- -Qparallel -Qansi-alias
-Qopt-prefetch /F1000000000

```

Benchmarks using both Fortran and C:

```

/arch:AVX -Qipo -O3 -Qprec-div- -Qparallel -Qansi-alias
-Qopt-prefetch -Qauto-ilp32 /F1000000000

```

Peak Compiler Invocation

C benchmarks:

```

icl -Qvc10 -Qstd=c99

```

C++ benchmarks:

```

icl -Qvc10

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS A88X-PRO Motherboard (AMD A10-7700K APU with Radeon R7 Graphics)

SPECfp2006 = 35.1

SPECfp_base2006 = 34.1

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jul-2014

Hardware Availability: Jan-2014

Software Availability: Oct-2013

Peak Compiler Invocation (Continued)

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icl -Qvc10 -Qstd=c99 ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Oa -Qauto-ilp32 /F1000000000
sh1W64M.lib -link /FORCE:MULTIPLE

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll4 -Qansi-alias -Qauto-ilp32
/F1000000000 sh1W64M.lib -link /FORCE:MULTIPLE

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll2 -Ob0 -Qansi-alias
-Qscalar-rep- /F1000000000

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS A88X-PRO Motherboard (AMD A10-7700K APU with Radeon R7 Graphics)

SPECfp2006 = 35.1

SPECfp_base2006 = 34.1

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jul-2014

Hardware Availability: Jan-2014

Software Availability: Oct-2013

Peak Optimization Flags (Continued)

459.GemsFDTD: basepeak = yes

```
465.tonto: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
           -Qipo -O3 -Qprec-div- -Qunroll4 -Qauto -Qinline-calloc
           /F1000000000
```

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-windows.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-windows.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Aug 12 15:10:44 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 29 July 2014.