



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS A88X-PRO Motherboard (AMD A10-7850K APU with
Radeon R7 Graphics)

SPECint_rate2006 = 93.7

SPECint_rate_base2006 = 90.3

CPU2006 license: 13


Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jul-2014

Hardware Availability: Jan-2014

Software Availability: Oct-2013

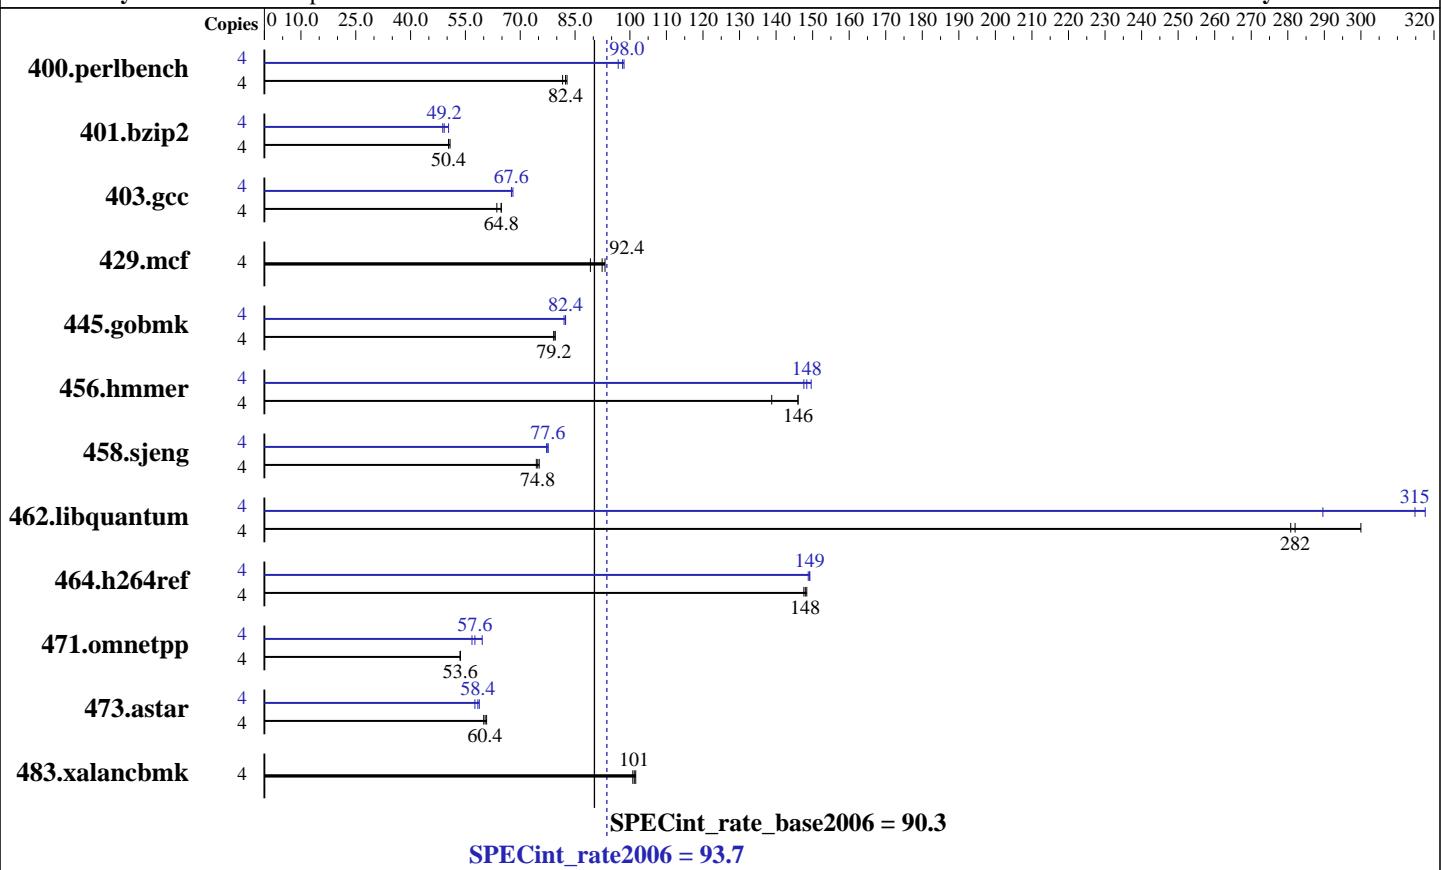

Hardware

CPU Name: AMD A10-7850K
 CPU Characteristics: AMD Turbo CORE technology up to 4.00 GHz
 CPU MHz: 3700
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 192 KB I on chip per chip, 96 KB I shared / 2 cores; 16 KB D on chip per core
 Secondary Cache: 4 MB I+D on chip per chip, 2 MB shared / 2 cores
 L3 Cache: None
 Other Cache: None
 Memory: 8 GB (2 x 4 GB 2Rx4 PC3-12800U-11)
 Disk Subsystem: 1 TB Seagate SATA HDD, 7200 RPM
 Other Hardware: None

Software

Operating System: Microsoft Windows 8.1 Pro 6.3.9600 N/A Build 9600
 Compiler: C/C++: Version 14.0.1.139 of Intel C++ Studio XE for Windows;
 Libraries: Version 16.00.30319.01 of Microsoft Visual Studio 2010 Professional SP1
 Auto Parallel: No
 File System: NTFS
 System State: Default
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: SmartHeap Library Version 10.0 from <http://www.microquill.com/>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS A88X-PRO Motherboard (AMD A10-7850K APU with
Radeon R7 Graphics)

SPECint_rate2006 = 93.7

SPECint_rate_base2006 = 90.3

CPU2006 license: 13

Test date: Jul-2014

Test sponsor: Intel Corporation

Hardware Availability: Jan-2014

Tested by: Intel Corporation

Software Availability: Oct-2013

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	473	82.8	478	81.6	474	82.4	4	403	96.8	398	98.4	399	98.0
401.bzip2	4	759	50.8	765	50.4	766	50.4	4	792	48.8	763	50.4	783	49.2
403.gcc	4	497	64.8	496	64.8	505	63.6	4	476	67.6	472	68.0	476	67.6
429.mcf	4	395	92.4	391	93.2	409	89.2	4	395	92.4	391	93.2	409	89.2
445.gobmk	4	529	79.2	530	79.2	528	79.6	4	510	82.4	511	82.0	510	82.4
456.hmmer	4	255	146	269	139	256	146	4	252	148	250	150	253	148
458.sjeng	4	645	75.2	646	74.8	651	74.4	4	625	77.6	628	77.2	625	77.6
462.libquantum	4	294	282	295	281	276	300	4	261	318	263	315	286	290
464.h264ref	4	596	148	598	148	599	148	4	594	149	594	149	595	149
471.omnetpp	4	466	53.6	466	53.6	465	53.6	4	435	57.6	420	59.6	441	56.8
473.astar	4	466	60.4	469	60.0	463	60.8	4	481	58.4	477	58.8	488	57.6
483.xalancbmk	4	273	101	274	101	272	102	4	273	101	274	101	272	102

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

To compile these binaries, the Intel Compiler 14.0 was set up to generate 32-bit binaries with the command:

"ipsxe-comp-vars.bat ia32 vs2010" (shortcut provided in the Intel(r) Parallel Studio XE 2013 program folder)

Submit Notes

Processes were bound to specific processors using the start command with the /affinity switch. The config file option 'submit' was used to generate the affinity mask for each process.

Platform Notes

```
Sysinfo program C:\SPEC14.0\Docs\sysinfo
$Rev: 6775 $ $Date::: 2011-08-16 #\$ \8787f7622badcf24e01c368b1db4377c
running on CltD850E6BC6E8A Tue Jul 1 11:48:32 2014
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
Trying 'systeminfo'
OS Name      : Microsoft Windows 8.1 Pro
OS Version   : 6.3.9600 N/A Build 9600
System Manufacturer: System manufacturer
System Model  : System Product Name
Processor(s) : 1 Processor(s) Installed.
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS A88X-PRO Motherboard (AMD A10-7850K APU with
Radeon R7 Graphics)

SPECint_rate2006 = 93.7

SPECint_rate_base2006 = 90.3

CPU2006 license: 13

Test date: Jul-2014

Test sponsor: Intel Corporation

Hardware Availability: Jan-2014

Tested by: Intel Corporation

Software Availability: Oct-2013

Platform Notes (Continued)

[01]: AMD64 Family 21 Model 48 Stepping 1 AuthenticAMD ~3700 Mhz
BIOS Version : American Megatrends Inc. 0703, 12/30/2013
Total Physical Memory: 7,106 MB

```
Trying 'wmic cpu get /value'  
DeviceID      : CPU0  
L2CacheSize   : 4096  
L3CacheSize   : 0  
MaxClockSpeed : 3700  
Name          : AMD A10-7850K APU with Radeon(TM) R7 Graphics  
NumberOfCores  : 2  
NumberOfLogicalProcessors: 4
```

(End of data from sysinfo program)

Component Notes

Tested systems can be used with Shin-G ATX case,
PC Power and Cooling 1200W power supply

General Notes

Binaries compiled on a system with 1x Intel Core i7-860 CPU
+ 8GB memory using Windows 7 Enterprise 64-bit

Base Compiler Invocation

C benchmarks:

```
icl -Qvc10 -Qstd=c99
```

C++ benchmarks:

```
icl -Qvc10
```

Base Portability Flags

```
403.gcc: -DSPEC_CPU_WIN32  
464.h264ref: -DWIN32 -DSPEC_CPU_NO_INTTYPES  
483.xalancbmk: -Qoption,cpp,--no_wchar_t_keyword
```

Base Optimization Flags

C benchmarks:

```
/arch:AVX -Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS A88X-PRO Motherboard (AMD A10-7850K APU with
Radeon R7 Graphics)

SPECint_rate2006 = 93.7

SPECint_rate_base2006 = 90.3

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jul-2014

Hardware Availability: Jan-2014

Software Availability: Oct-2013

Base Optimization Flags (Continued)

C++ benchmarks:

```
/arch:AVX -Qipo -O3 -Qprec-div -Qopt-prefetch -Qcxx-features  
/F512000000 shlw32M.lib -link /FORCE:MULTIPLE
```

Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

Peak Compiler Invocation

C benchmarks (except as noted below):

```
icl -Qvc10 -Qstd=c99
```

```
456.hmmr: C:\Program Files (x86)\Intel\Composer XE 2013 SP1/bin/intel64/icl.exe
```

```
458.sjeng: C:\Program Files (x86)\Intel\Composer XE 2013 SP1/bin/intel64/icl.exe
```

```
462.libquantum: C:\Program Files (x86)\Intel\Composer XE 2013 SP1/bin/intel64/icl.exe  
-Qstd=c99
```

C++ benchmarks (except as noted below):

```
icl -Qvc10
```

```
473.astar: C:\Program Files (x86)\Intel\Composer XE 2013 SP1/bin/intel64/icl.exe
```

Peak Portability Flags

```
403.gcc: -DSPEC_CPU_WIN32
```

```
456.hmmr: -DSPEC_CPU_P64
```

```
458.sjeng: -DSPEC_CPU_P64
```

```
462.libquantum: -DSPEC_CPU_P64
```

```
464.h264ref: -DWIN32 -DSPEC_CPU_NO_INTTYPES
```

```
473.astar: -DSPEC_CPU_P64
```

```
483.xalancbmk: -Qoption,cpp,--no_wchar_t_keyword
```

Peak Optimization Flags

C benchmarks:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS A88X-PRO Motherboard (AMD A10-7850K APU with
Radeon R7 Graphics)

SPECint_rate2006 = 93.7

SPECint_rate_base2006 = 90.3

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jul-2014

Hardware Availability: Jan-2014

Software Availability: Oct-2013

Peak Optimization Flags (Continued)

```
400.perlbench: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
               -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
               /F512000000 shlw32M.lib           -link /FORCE:MULTIPLE
```

```
401.bzip2: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
            -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qansi-alias
            /F512000000
```

```
403.gcc: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
          -Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000
```

429.mcf: basepeak = yes

```
445.gobmk: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
            -Qipo -O2 -Qprec-div- -Qansi-alias /F512000000
```

```
456.hmmr: -Qauto-ilp32 /arch:AVX(pass 2) -Qprof_gen(pass 1)
            -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qopt-prefetch
            /F512000000
```

```
458.sjeng: -Qauto-ilp32 /arch:AVX(pass 2) -Qprof_gen(pass 1)
            -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll14
            /F512000000
```

```
462.libquantum: -Qauto-ilp32 /arch:AVX -Qipo -O3 -Qprec-div-
                -Qopt-prefetch /F512000000
```

```
464.h264ref: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
              -Qipo -O3 -Qprec-div- -Qunroll12 -Qansi-alias /F512000000
```

C++ benchmarks:

```
471.omnetpp: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
              -Qipo -O3 -Qprec-div- -Qansi-alias
              -Qopt-ra-region-strategy=block /F512000000 shlw32M.lib
              -link /FORCE:MULTIPLE
```

```
473.astar: -Qauto-ilp32 /arch:AVX -Qipo -O3 -Qprec-div-
            -Qopt-prefetch /F512000000 shlw64M.lib
            -link /FORCE:MULTIPLE
```

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS A88X-PRO Motherboard (AMD A10-7850K APU with
Radeon R7 Graphics)

SPECint_rate2006 = 93.7

SPECint_rate_base2006 = 90.3

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jul-2014

Hardware Availability: Jan-2014

Software Availability: Oct-2013

Peak Other Flags (Continued)

403.gcc: -Dalloca=_alloca

456.hmmer: -link -LIBPATH:C:\Program Files (x86)\Intel\Composer XE 2013 SP1/compiler/lib/intel64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib/AMD64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib
-link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64

458.sjeng: -link -LIBPATH:C:\Program Files (x86)\Intel\Composer XE 2013 SP1/compiler/lib/intel64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib/AMD64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib
-link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64

462.libquantum: -link -LIBPATH:C:\Program Files (x86)\Intel\Composer XE 2013 SP1/compiler/lib/intel64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib/AMD64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib
-link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64

C++ benchmarks:

473.astar: -link -LIBPATH:C:\Program Files (x86)\Intel\Composer XE 2013 SP1/compiler/lib/intel64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib/AMD64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib
-link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-windows.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-windows.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Aug 12 15:10:51 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 29 July 2014.