



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp®_rate2006 = 92.8

Intel DH87MC Motherboard (Intel Core i3-4130)

SPECfp_rate_base2006 = 91.9

CPU2006 license: 13


Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jun-2014

Hardware Availability: Sep-2013

Software Availability: Oct-2013

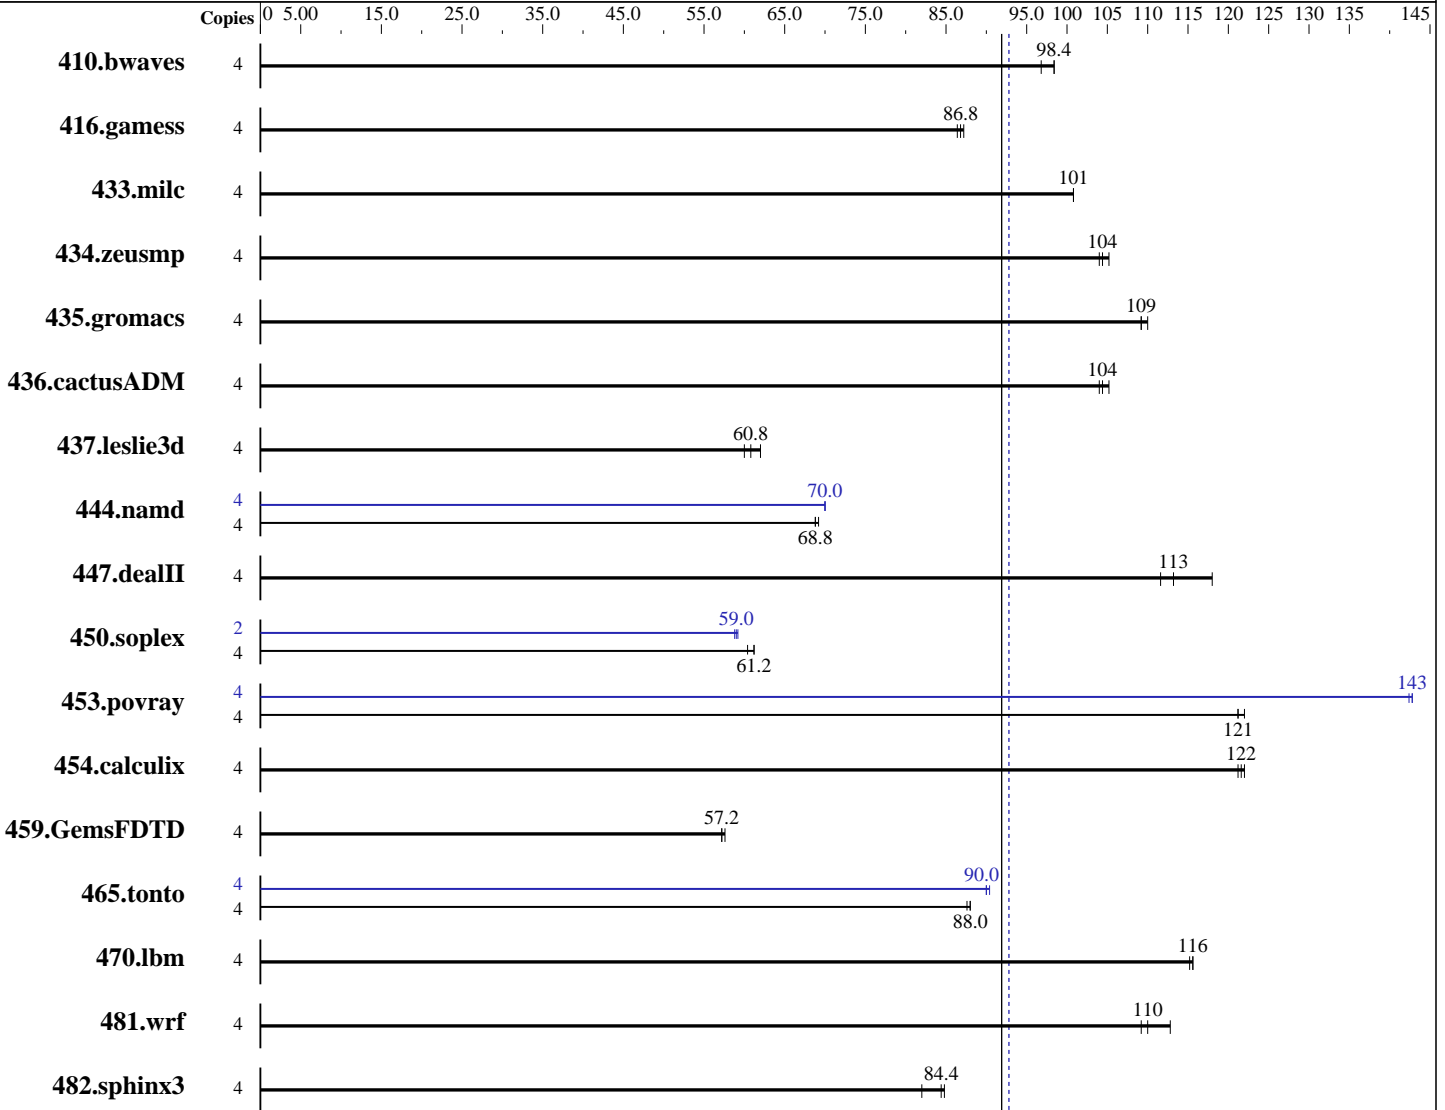

SPECfp_rate_base2006 = 91.9

SPECfp_rate2006 = 92.8

Hardware

CPU Name: Intel Core i3-4130
 CPU Characteristics:
 CPU MHz: 3400
 FPU: Integrated
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip, 2 threads/core
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Microsoft Windows 8.1 Pro
 6.3.9600 N/A Build 9600
 Compiler: C/C++: Version 14.0.1.139 of Intel C++ Studio XE for Windows;
 Fortran: Version 14.0.1.139 of Intel Fortran Studio XE for Windows;
 Libraries: Version 16.00.30319.01 of Microsoft Visual Studio 2010 Professional SP1
 Auto Parallel: No

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp_rate2006 = **92.8**

Intel DH87MC Motherboard (Intel Core i3-4130)

SPECfp_rate_base2006 = **91.9**

CPU2006 license: 13

Test date: Jun-2014

Test sponsor: Intel Corporation

Hardware Availability: Sep-2013

Tested by: Intel Corporation

Software Availability: Oct-2013

L3 Cache: 3 MB I+D on chip per chip
 Other Cache: None
 Memory: 8 GB (2 x 4 GB 2Rx4 PC3-12800U-11)
 Disk Subsystem: 1 TB Seagate SATA HDD, 7200 RPM
 Other Hardware: None

File System: NTFS
 System State: Default
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: SmartHeap Library Version 10.0 from <http://www.microquill.com/>

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	562	96.8	553	98.4	552	98.4	4	562	96.8	553	98.4	552	98.4
416.gamess	4	905	86.4	900	87.2	902	86.8	4	905	86.4	900	87.2	902	86.8
433.milc	4	364	101	365	101	365	101	4	364	101	365	101	365	101
434.zeusmp	4	349	104	350	104	346	105	4	349	104	350	104	346	105
435.gromacs	4	259	110	261	109	261	109	4	259	110	261	109	261	109
436.cactusADM	4	457	104	454	105	460	104	4	457	104	454	105	460	104
437.leslie3d	4	628	60.0	606	62.0	619	60.8	4	628	60.0	606	62.0	619	60.8
444.namd	4	465	69.2	466	68.8	466	68.8	4	458	70.0	458	70.0	459	70.0
447.dealII	4	404	113	410	112	388	118	4	404	113	410	112	388	118
450.soplex	4	545	61.2	552	60.4	546	61.2	2	284	58.8	282	59.2	283	59.0
453.povray	4	176	121	175	121	175	122	4	149	143	150	142	149	143
454.calculix	4	271	122	272	122	272	121	4	271	122	272	122	272	121
459.GemsFDTD	4	741	57.2	740	57.2	738	57.6	4	741	57.2	740	57.2	738	57.6
465.tonto	4	446	88.0	450	87.6	448	88.0	4	438	90.0	438	90.0	435	90.4
470.lbm	4	476	116	476	116	477	115	4	476	116	476	116	477	115
481.wrf	4	406	110	409	109	397	113	4	406	110	409	109	397	113
482.sphinx3	4	950	82.0	919	84.8	925	84.4	4	950	82.0	919	84.8	925	84.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

To compile these binaries, the Intel Compiler 14.0 was set up to generate 64-bit binaries with the command:
 "ipsxe-comp-vars.bat intel64 vs2010" (shortcut provided in the Intel(r) Parallel Studio XE 2013 program folder)

Submit Notes

Processes were bound to specific processors using the start command with the /affinity switch. The config file option 'submit' was used to generate the affinity mask for each process.



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp_rate2006 = 92.8

Intel DH87MC Motherboard (Intel Core i3-4130)

SPECfp_rate_base2006 = 91.9

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jun-2014

Hardware Availability: Sep-2013

Software Availability: Oct-2013

Platform Notes

Sysinfo program C:\SPEC14.0/Docs/sysinfo
\$Rev: 6775 \$ \$Date:: 2011-08-16 #\$ \8787f7622badcf24e01c368b1db4377c
running on Clt54BEF708F609 Sat Jun 28 12:12:13 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

Trying 'systeminfo'

OS Name : Microsoft Windows 8.1 Pro
OS Version : 6.3.9600 N/A Build 9600
System Manufacturer: INTEL_
System Model : DH87MC_
Processor(s) : 1 Processor(s) Installed.
 [01]: Intel64 Family 6 Model 60 Stepping 3 GenuineIntel ~3400 Mhz
BIOS Version : Intel Corp. MCH8710H.86A.0047.2013.0606.1508, 6/6/2013
Total Physical Memory: 7,862 MB

Trying 'wmic cpu get /value'

DeviceID : CPU0
L2CacheSize : 512
L3CacheSize : 3072
MaxClockSpeed : 3400
Name : Intel(R) Core(TM) i3-4130 CPU @ 3.40GHz
NumberOfCores : 2
NumberOfLogicalProcessors: 4

(End of data from sysinfo program)

Component Notes

Tested systems can be used with Shin-G ATX case,
PC Power and Cooling 1200W power supply

General Notes

Binaries compiled on a system with 1x Intel Core i7-860 CPU
+ 8GB memory using Windows 7 Enterprise 64-bit

Base Compiler Invocation

C benchmarks:

icl -Qvc10 -Qstd=c99

C++ benchmarks:

icl -Qvc10

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp_rate2006 = 92.8

Intel DH87MC Motherboard (Intel Core i3-4130)

SPECfp_rate_base2006 = 91.9

CPU2006 license: 13

Test date: Jun-2014

Test sponsor: Intel Corporation

Hardware Availability: Sep-2013

Tested by: Intel Corporation

Software Availability: Oct-2013

Base Compiler Invocation (Continued)

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icl -Qvc10 -Qstd=c99 ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_P64
 416.gamess: -DSPEC_CPU_P64
 433.milc: -DSPEC_CPU_P64
 434.zeusmp: -DSPEC_CPU_P64
 435.gromacs: -DSPEC_CPU_P64
 436.cactusADM: -DSPEC_CPU_P64 /names:lowercase /assume:underscore
 437.leslie3d: -DSPEC_CPU_P64
 444.namd: -DSPEC_CPU_P64 /TP
 447.dealII: -DSPEC_CPU_P64 -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
 -Qoption,cpp,--ms_incompat_treatment_of_commas_in_macros
 450.soplex: -DSPEC_CPU_P64
 453.povray: -DSPEC_CPU_P64 -DSPEC_CPU_NEED_INVHYP -DNEED_INVHYP
 454.calculix: -DSPEC_CPU_P64 -DSPEC_CPU_NOZMODIFIER /names:lowercase
 459.GemsFDTD: -DSPEC_CPU_P64
 465.tonto: -DSPEC_CPU_P64
 470.lbm: -DSPEC_CPU_P64
 481.wrf: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
 482.sphinx3: -DSPEC_CPU_P64

Base Optimization Flags

C benchmarks:

-QxCORE-AVX2 -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
-Qauto-ilp32 /F1000000000 -link /FORCE:MULTIPLE

C++ benchmarks:

-QxCORE-AVX2 -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
-Qcxx-features -Qauto-ilp32 /F1000000000 shlw64M.lib
-link /FORCE:MULTIPLE

Fortran benchmarks:

-QxCORE-AVX2 -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
/F1000000000 -link /FORCE:MULTIPLE

Benchmarks using both Fortran and C:

-QxCORE-AVX2 -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
-Qauto-ilp32 /F1000000000 -link /FORCE:MULTIPLE



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp_rate2006 = 92.8

Intel DH87MC Motherboard (Intel Core i3-4130)

SPECfp_rate_base2006 = 91.9

CPU2006 license: 13

Test date: Jun-2014

Test sponsor: Intel Corporation

Hardware Availability: Sep-2013

Tested by: Intel Corporation

Software Availability: Oct-2013

Peak Compiler Invocation

C benchmarks:

icl -Qvc10 -Qstd=c99

C++ benchmarks:

icl -Qvc10

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icl -Qvc10 -Qstd=c99 ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -QxCORE-AVX2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Oa -Qauto-ilp32 /F1000000000
sh1W64M.lib -link /FORCE:MULTIPLE

447.dealIII: basepeak = yes

450.soplex: -QxCORE-AVX2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qauto-ilp32 /F1000000000 sh1W64M.lib
-link /FORCE:MULTIPLE

453.povray: -QxCORE-AVX2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qopt-prefetch -Qauto-ilp32
/F1000000000 sh1W64M.lib -link /FORCE:MULTIPLE

Fortran benchmarks:

410.bwaves: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp_rate2006 = 92.8

Intel DH87MC Motherboard (Intel Core i3-4130)

SPECfp_rate_base2006 = 91.9

CPU2006 license: 13

Test date: Jun-2014

Test sponsor: Intel Corporation

Hardware Availability: Sep-2013

Tested by: Intel Corporation

Software Availability: Oct-2013

Peak Optimization Flags (Continued)

416.gamess: basepeak = yes

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -QxCORE-AVX2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll4 -Qauto /F10000000000
-link /FORCE:MULTIPLE

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-windows.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-windows.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Jul 30 10:54:37 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 29 July 2014.