



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint®_rate2006 = 1240

Huawei CH240 (Intel Xeon E5-4650)

SPECint_rate_base2006 = 1200

CPU2006 license: 3175


Test sponsor: Huawei

Tested by: Huawei

Test date: Jul-2014

Hardware Availability: May-2012

Software Availability: Nov-2013

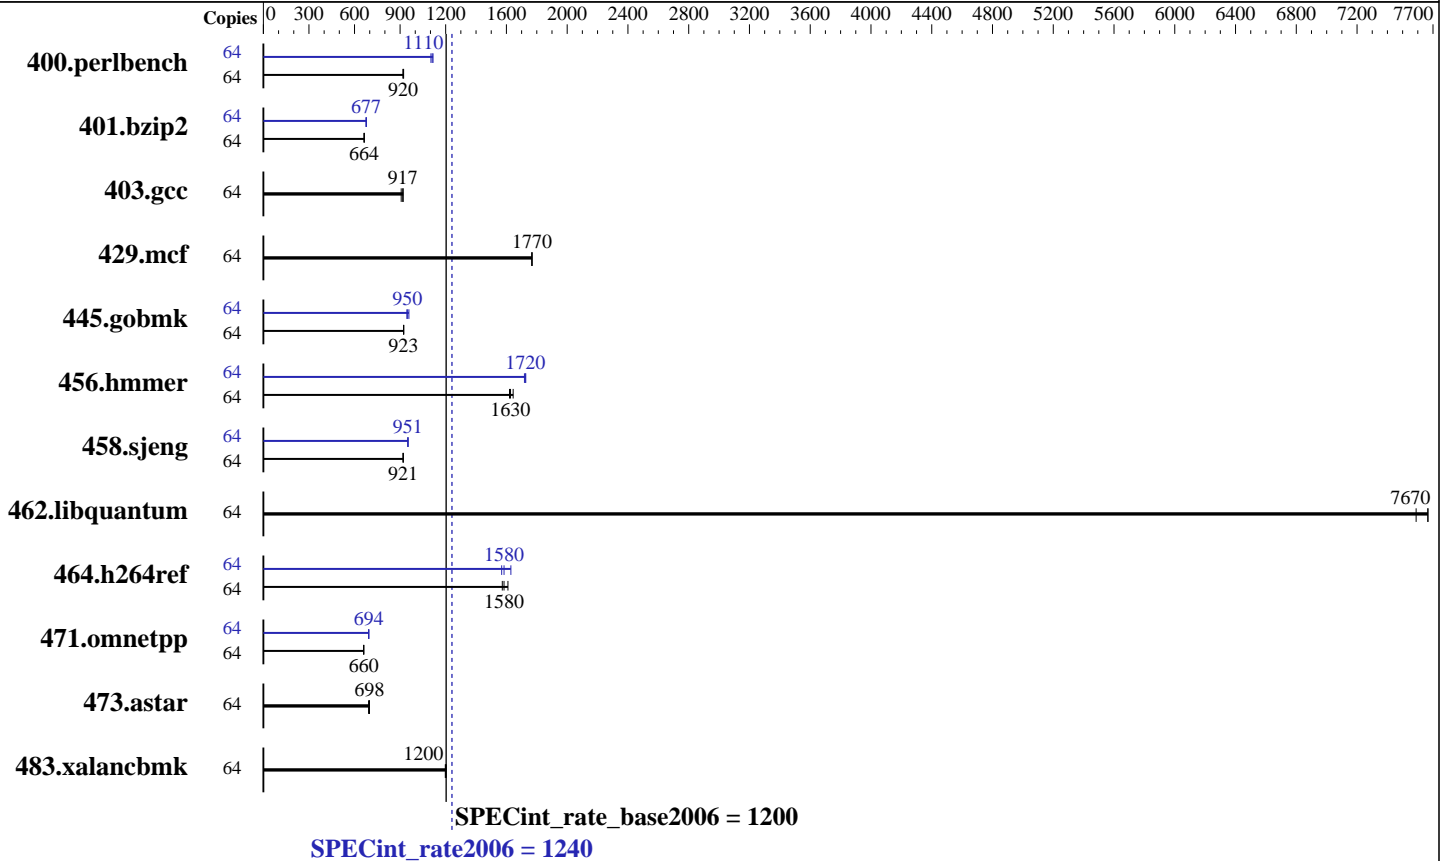

Hardware

CPU Name: Intel Xeon E5-4650
 CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz
 CPU MHz: 2700
 FPU: Integrated
 CPU(s) enabled: 32 cores, 4 chips, 8 cores/chip, 2 threads/core
 CPU(s) orderable: 2,4 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 20 MB I+D on chip per chip
 Other Cache: None
 Memory: 512 GB (32 x 16 GB 2Rx4 PC3-12800R-11, ECC)
 Disk Subsystem: 1 x 500 GB SATA, 7200 RPM
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)
 2.6.32-431.el6.x86_64
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux
 Auto Parallel: No
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.0



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint_rate2006 = 1240

Huawei CH240 (Intel Xeon E5-4650)

SPECint_rate_base2006 = 1200

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: Jul-2014
Hardware Availability: May-2012
Software Availability: Nov-2013

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	64	680	920	677	923	680	920	64	567	1100	560	1120	563	1110
401.bzip2	64	932	663	930	664	930	664	64	914	676	910	679	913	677
403.gcc	64	560	921	562	917	568	907	64	560	921	562	917	568	907
429.mcf	64	330	1770	330	1770	330	1770	64	330	1770	330	1770	330	1770
445.gobmk	64	726	924	728	923	727	923	64	707	950	711	944	701	958
456.hammer	64	363	1640	367	1630	369	1620	64	346	1720	346	1730	347	1720
458.sjeng	64	841	921	842	920	841	921	64	814	951	813	953	814	951
462.libquantum	64	175	7590	173	7670	173	7670	64	175	7590	173	7670	173	7670
464.h264ref	64	894	1580	880	1610	900	1570	64	869	1630	903	1570	894	1580
471.omnetpp	64	606	660	606	660	605	661	64	577	694	577	693	577	694
473.astar	64	644	698	649	692	643	698	64	644	698	649	692	643	698
483.xalancbmk	64	368	1200	367	1200	369	1200	64	368	1200	367	1200	369	1200

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

Sysinfo program /spec14/config/sysinfo.rev6818
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191
running on localhost.localdomain Sat Jul 12 22:03:47 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-4650 0 @ 2.70GHz
 4 "physical id"s (chips)
 64 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 8
siblings : 16
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint_rate2006 = 1240

Huawei CH240 (Intel Xeon E5-4650)

SPECint_rate_base2006 = 1200

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jul-2014

Hardware Availability: May-2012

Software Availability: Nov-2013

Platform Notes (Continued)

```

physical 0: cores 0 1 2 3 4 5 6 7
physical 1: cores 0 1 2 3 4 5 6 7
physical 2: cores 0 1 2 3 4 5 6 7
physical 3: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB

```

From /proc/meminfo

```

MemTotal:      529228324 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

/usr/bin/lsb_release -d

Red Hat Enterprise Linux Server release 6.5 (Santiago)

From /etc/*release* /etc/*version*

```

redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

```

uname -a:

```

Linux localhost.localdomain 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54
EST 2013 x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Jul 12 20:30

SPEC is set to: /spec14

```

Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2        ext4  411G  11G  380G   3% /

```

Additional information from dmidecode:

BIOS Insyde Corp. OARYV388 04/23/2014

Memory:

```

16x Micron 36JSF2G72PZ-1G6E1 16 GB 1600 MHz 2 rank
16x NO DIMM NO DIMM
16x Samsung M393B2G70BH0-CK0 16 GB 1600 MHz 2 rank

```

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/spec14/libs/32:/spec14/libs/64:/spec14/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint_rate2006 = 1240

Huawei CH240 (Intel Xeon E5-4650)

SPECint_rate_base2006 = 1200

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: Jul-2014
Hardware Availability: May-2012
Software Availability: Nov-2013

Base Compiler Invocation

C benchmarks:
icc -m32

C++ benchmarks:
icpc -m32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
-Wl,-z,muldefs -L/sh -lsmartheap

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:
icpc -m32



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint_rate2006 = 1240

Huawei CH240 (Intel Xeon E5-4650)

SPECint_rate_base2006 = 1200

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jul-2014

Hardware Availability: May-2012

Software Availability: Nov-2013

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
 401.bzip2: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LINUX
 483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: basepeak = yes

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
 -ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
 -L/sh -lsmartheap

473.astar: basepeak = yes

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint_rate2006 = 1240

Huawei CH240 (Intel Xeon E5-4650)

SPECint_rate_base2006 = 1200

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jul-2014

Hardware Availability: May-2012

Software Availability: Nov-2013

Peak Optimization Flags (Continued)

483.xalanbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Sep 2 13:38:39 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 2 September 2014.