



# SPEC<sup>®</sup> CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Intel Corporation

SPECint<sup>®</sup>\_rate2006 = 115

ASUS H97M-PLUS Motherboard (Intel Core i3-4350)

SPECint\_rate\_base2006 = 109

CPU2006 license: 13


Test date: Jun-2014

Test sponsor: Intel Corporation

Hardware Availability: Jun-2014

Tested by: Intel Corporation

Software Availability: Oct-2013

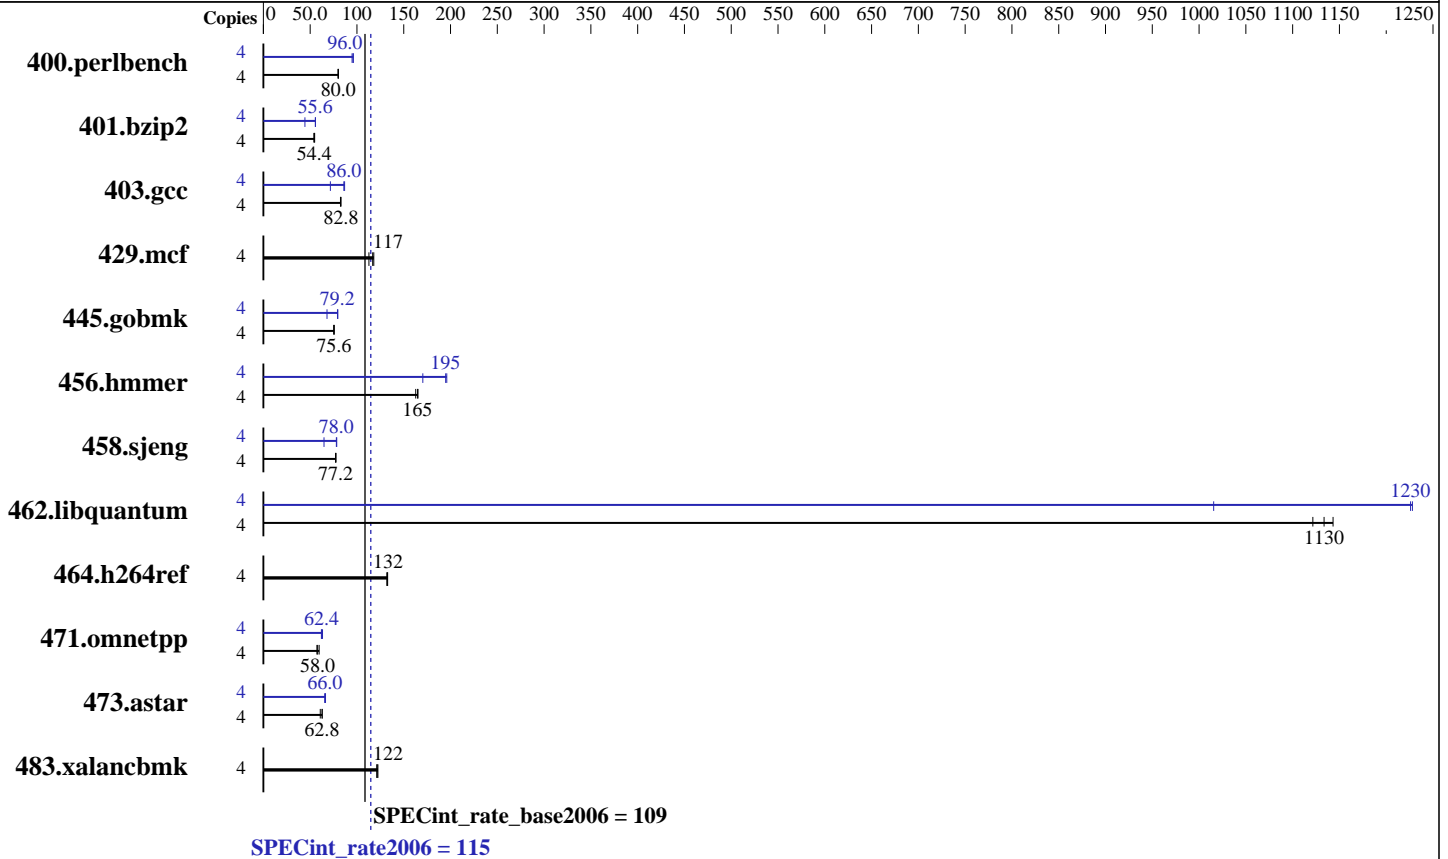

### Hardware

CPU Name: Intel Core i3-4350  
 CPU Characteristics: 3600  
 CPU MHz: Integrated  
 FPU: Integrated  
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip, 2 threads/core  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 4 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 8 GB (2 x 4 GB 2Rx4 PC3-12800U-11)  
 Disk Subsystem: 1 TB SATA HDD, 7200 RPM  
 Other Hardware: None

### Software

Operating System: Microsoft Windows 8.1 Pro  
 6.3.9600 N/A Build 9600  
 Compiler: C/C++: Version 14.0.1.139 of Intel C++ Studio XE for Windows;  
 Libraries: Version 16.00.30319.01 of Microsoft Visual Studio 2010 Professional SP1  
 Auto Parallel: No  
 File System: NTFS  
 System State: Default  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: SmartHeap Library Version 10.0 from <http://www.microquill.com/>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint\_rate2006 = 115

ASUS H97M-PLUS Motherboard (Intel Core i3-4350)

SPECint\_rate\_base2006 = 109

CPU2006 license: 13

Test date: Jun-2014

Test sponsor: Intel Corporation

Hardware Availability: Jun-2014

Tested by: Intel Corporation

Software Availability: Oct-2013

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	<b>489</b>	<b>80.0</b>	488	80.0	489	80.0	4	412	94.8	<b>407</b>	<b>96.0</b>	406	96.0
401.bzip2	4	713	54.0	<b>709</b>	<b>54.4</b>	706	54.8	4	870	44.4	<b>695</b>	<b>55.6</b>	695	55.6
403.gcc	4	390	82.4	<b>389</b>	<b>82.8</b>	388	82.8	4	450	71.6	372	86.8	<b>374</b>	<b>86.0</b>
429.mcf	4	323	113	<b>313</b>	<b>117</b>	309	118	4	323	113	<b>313</b>	<b>117</b>	309	118
445.gobmk	4	<b>555</b>	<b>75.6</b>	557	75.2	555	75.6	4	617	68.0	<b>530</b>	<b>79.2</b>	526	79.6
456.hammer	4	<b>227</b>	<b>165</b>	229	163	226	165	4	219	170	<b>192</b>	<b>195</b>	190	196
458.sjeng	4	626	77.2	623	77.6	<b>626</b>	<b>77.2</b>	4	746	64.8	619	78.4	<b>620</b>	<b>78.0</b>
462.libquantum	4	<b>73.1</b>	<b>1130</b>	73.9	1120	72.5	1140	4	81.6	1020	<b>67.6</b>	<b>1230</b>	67.5	1230
464.h264ref	4	666	133	671	132	<b>669</b>	<b>132</b>	4	666	133	671	132	<b>669</b>	<b>132</b>
471.omnetpp	4	438	57.2	420	59.6	<b>432</b>	<b>58.0</b>	4	395	63.2	403	62.0	<b>400</b>	<b>62.4</b>
473.astar	4	463	60.8	<b>448</b>	<b>62.8</b>	448	62.8	4	423	66.4	428	65.6	<b>426</b>	<b>66.0</b>
483.xalancbmk	4	<b>227</b>	<b>122</b>	228	121	226	122	4	<b>227</b>	<b>122</b>	228	121	226	122

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Invocation Notes

To compile these binaries, the Intel Compiler 14.0 was set up to generate 32-bit binaries with the command:  
"ipsxe-comp-vars.bat ia32 vs2010" (shortcut provided in the Intel(r) Parallel Studio XE 2013 program folder)

## Submit Notes

Processes were bound to specific processors using the start command with the /affinity switch. The config file option 'submit' was used to generate the affinity mask for each process.

## Platform Notes

Sysinfo program C:\SPEC14.0/Docs/sysinfo  
\$Rev: 6775 \$ \$Date:: 2011-08-16 #\$ \8787f7622badcf24e01c368b1db4377c  
running on Clt10C37B4DED4E Fri Jun 27 21:54:49 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

Trying 'systeminfo'  
OS Name : Microsoft Windows 8.1 Pro  
OS Version : 6.3.9600 N/A Build 9600  
System Manufacturer: ASUS  
System Model : All Series  
Processor(s) : 1 Processor(s) Installed.

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint\_rate2006 = 115

ASUS H97M-PLUS Motherboard (Intel Core i3-4350)

SPECint\_rate\_base2006 = 109

CPU2006 license: 13

Test date: Jun-2014

Test sponsor: Intel Corporation

Hardware Availability: Jun-2014

Tested by: Intel Corporation

Software Availability: Oct-2013

## Platform Notes (Continued)

[01]: Intel64 Family 6 Model 60 Stepping 3 GenuineIntel ~3600 Mhz  
BIOS Version : American Megatrends Inc. 2001, 6/13/2014  
Total Physical Memory: 8,006 MB

Trying 'wmic cpu get /value'

DeviceID : CPU0

L2CacheSize : 512

L3CacheSize : 4096

MaxClockSpeed : 3600

Name : Intel(R) Core(TM) i3-4350 CPU @ 3.60GHz

NumberOfCores : 2

NumberOfLogicalProcessors: 4

(End of data from sysinfo program)

## Component Notes

Tested systems can be used with Shin-G ATX case,  
PC Power and Cooling 1200W power supply

## General Notes

Binaries compiled on a system with 1x Intel Core i7-860 CPU  
+ 8GB memory using Windows 7 Enterprise 64-bit

## Base Compiler Invocation

C benchmarks:

icl -Qvc10 -Qstd=c99

C++ benchmarks:

icl -Qvc10

## Base Portability Flags

403.gcc: -DSPEC\_CPU\_WIN32

464.h264ref: -DWIN32 -DSPEC\_CPU\_NO\_INTTYPES

483.xalancbmk: -Qoption,cpp,--no\_wchar\_t\_keyword

## Base Optimization Flags

C benchmarks:

-QxCORE-AVX2 -Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint\_rate2006 = 115

ASUS H97M-PLUS Motherboard (Intel Core i3-4350)

SPECint\_rate\_base2006 = 109

CPU2006 license: 13

Test date: Jun-2014

Test sponsor: Intel Corporation

Hardware Availability: Jun-2014

Tested by: Intel Corporation

Software Availability: Oct-2013

## Base Optimization Flags (Continued)

C++ benchmarks:

-QxCORE-AVX2 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qcxx-features  
/F512000000 shlw32M.lib -link /FORCE:MULTIPLE

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icl -Qvc10 -Qstd=c99

456.hmmr: C:\Program Files (x86)\Intel\Composer XE 2013 SP1/bin/intel64/icl.exe

458.sjeng: C:\Program Files (x86)\Intel\Composer XE 2013 SP1/bin/intel64/icl.exe

462.libquantum: C:\Program Files (x86)\Intel\Composer XE 2013 SP1/bin/intel64/icl.exe  
-Qstd=c99

C++ benchmarks (except as noted below):

icl -Qvc10

473.astar: C:\Program Files (x86)\Intel\Composer XE 2013 SP1/bin/intel64/icl.exe

## Peak Portability Flags

403.gcc: -DSPEC\_CPU\_WIN32  
456.hmmr: -DSPEC\_CPU\_P64  
458.sjeng: -DSPEC\_CPU\_P64  
462.libquantum: -DSPEC\_CPU\_P64  
464.h264ref: -DWIN32 -DSPEC\_CPU\_NO\_INTTYPES  
473.astar: -DSPEC\_CPU\_P64  
483.xalancbmk: -Qoption,cpp,--no\_wchar\_t\_keyword

## Peak Optimization Flags

C benchmarks:

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint\_rate2006 = 115

ASUS H97M-PLUS Motherboard (Intel Core i3-4350)

SPECint\_rate\_base2006 = 109

CPU2006 license: 13

Test date: Jun-2014

Test sponsor: Intel Corporation

Hardware Availability: Jun-2014

Tested by: Intel Corporation

Software Availability: Oct-2013

## Peak Optimization Flags (Continued)

400.perlbench: -QxCORE-AVX2(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch  
/F512000000 shlw32M.lib -link /FORCE:MULTIPLE

401.bzip2: -QxCORE-AVX2(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qopt-prefetch -Qansi-alias  
/F512000000

403.gcc: -QxCORE-AVX2(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000

429.mcf: basepeak = yes

445.gobmk: -QxCORE-AVX2(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O2 -Qprec-div- -Qansi-alias /F512000000

456.hmmer: -Qauto-ilp32 -QxCORE-AVX2(pass 2) -Qprof\_gen(pass 1)  
-Qprof\_use(pass 2) -Qipo -O3 -Qprec-div- -Qopt-prefetch  
/F512000000

458.sjeng: -Qauto-ilp32 -QxCORE-AVX2(pass 2) -Qprof\_gen(pass 1)  
-Qprof\_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll4  
/F512000000

462.libquantum: -Qauto-ilp32 -QxCORE-AVX2 -Qipo -O3 -Qprec-div-  
-Qopt-prefetch /F512000000

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: -QxCORE-AVX2(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qansi-alias  
-Qopt-ra-region-strategy=block /F512000000 shlw32M.lib  
-link /FORCE:MULTIPLE

473.astar: -Qauto-ilp32 -QxCORE-AVX2 -Qipo -O3 -Qprec-div-  
-Qopt-prefetch /F512000000 shlw64M.lib  
-link /FORCE:MULTIPLE

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint\_rate2006 = 115

ASUS H97M-PLUS Motherboard (Intel Core i3-4350)

SPECint\_rate\_base2006 = 109

CPU2006 license: 13

Test date: Jun-2014

Test sponsor: Intel Corporation

Hardware Availability: Jun-2014

Tested by: Intel Corporation

Software Availability: Oct-2013

## Peak Other Flags (Continued)

```
456.hmmr: -link -LIBPATH:C:\Program Files (x86)\Intel\Composer XE 2013 SP1/compiler/lib/intel64
          -link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib/AMD64
          -link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib
          -link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64
```

```
458.sjeng: -link -LIBPATH:C:\Program Files (x86)\Intel\Composer XE 2013 SP1/compiler/lib/intel64
           -link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib/AMD64
           -link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib
           -link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64
```

```
462.libquantum: -link -LIBPATH:C:\Program Files (x86)\Intel\Composer XE 2013 SP1/compiler/lib/intel64
                -link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib/AMD64
                -link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib
                -link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64
```

C++ benchmarks:

```
473.astar: -link -LIBPATH:C:\Program Files (x86)\Intel\Composer XE 2013 SP1/compiler/lib/intel64
           -link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib/AMD64
           -link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib
           -link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64
```

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-windows.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-windows.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Tue Aug 12 13:16:29 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 12 August 2014.