



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3550 M4
(Intel Xeon E5-2628L v2, 1.90 GHz)

SPECfp®2006 = 74.3

SPECfp_base2006 = 71.0

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Aug-2014

Hardware Availability: Dec-2013

Software Availability: Sep-2013

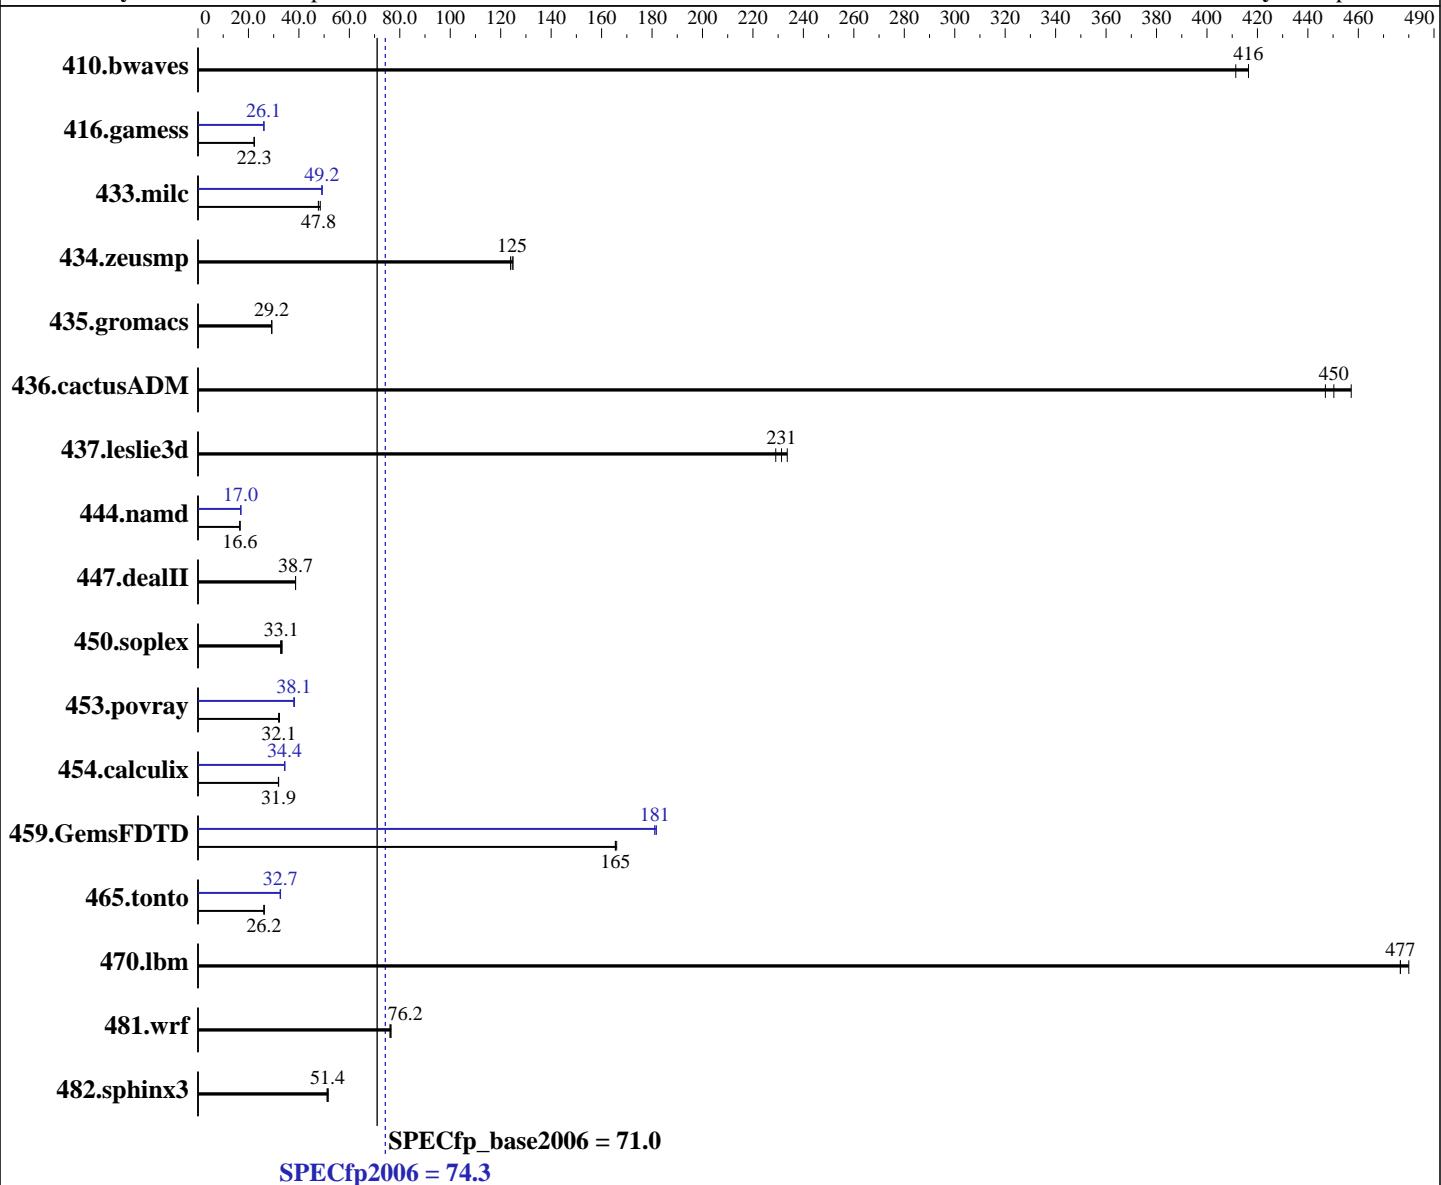

Hardware

CPU Name: Intel Xeon E5-2628L v2
 CPU Characteristics: Intel Turbo Boost Technology up to 2.40 GHz
 CPU MHz: 1900
 FPU: Integrated
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)
 Compiler: 2.6.32-358.el6.x86_64
 Auto Parallel: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;
 File System: Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
 ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3550 M4
(Intel Xeon E5-2628L v2, 1.90 GHz)

SPECfp2006 = 74.3

SPECfp_base2006 = 71.0

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Aug-2014

Hardware Availability: Dec-2013

Software Availability: Sep-2013

L3 Cache: 20 MB I+D on chip per chip
Other Cache: None
Memory: 256 GB (16 x 16 GB 2Rx4 PC3-14900R-13, ECC, running at 1600 MHz)
Disk Subsystem: 1 x 400 GB SAS SSD, RAID 0
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio										
410.bwaves	32.6	416	33.0	411	<u>32.6</u>	<u>416</u>	32.6	416	33.0	411	<u>32.6</u>	<u>416</u>
416.gamess	<u>879</u>	<u>22.3</u>	879	22.3	877	22.3	<u>751</u>	<u>26.1</u>	<u>751</u>	<u>26.1</u>	748	26.2
433.milc	<u>192</u>	<u>47.8</u>	189	48.5	192	47.7	<u>186</u>	<u>49.2</u>	<u>187</u>	<u>49.2</u>	187	49.1
434.zeusmp	<u>73.1</u>	<u>125</u>	72.8	125	73.5	124	<u>73.1</u>	<u>125</u>	72.8	125	73.5	124
435.gromacs	<u>244</u>	<u>29.2</u>	244	29.3	245	29.2	<u>244</u>	<u>29.2</u>	244	29.3	245	29.2
436.cactusADM	<u>26.5</u>	<u>450</u>	26.1	457	26.7	447	<u>26.5</u>	<u>450</u>	26.1	457	26.7	447
437.leslie3d	41.0	229	<u>40.6</u>	<u>231</u>	40.2	234	41.0	229	<u>40.6</u>	<u>231</u>	40.2	234
444.namd	482	16.6	483	16.6	<u>482</u>	<u>16.6</u>	474	16.9	<u>473</u>	<u>17.0</u>	472	17.0
447.dealII	296	38.7	<u>296</u>	<u>38.7</u>	296	38.7	296	38.7	<u>296</u>	<u>38.7</u>	296	38.7
450.soplex	250	33.4	255	32.7	<u>252</u>	<u>33.1</u>	250	33.4	255	32.7	<u>252</u>	<u>33.1</u>
453.povray	165	32.3	<u>166</u>	<u>32.1</u>	166	32.0	139	38.3	140	38.0	<u>140</u>	<u>38.1</u>
454.calculix	258	31.9	259	31.9	<u>258</u>	<u>31.9</u>	240	34.3	240	34.4	<u>240</u>	<u>34.4</u>
459.GemsFDTD	63.9	166	<u>64.1</u>	<u>165</u>	64.1	165	<u>58.6</u>	<u>181</u>	58.4	182	58.6	181
465.tonto	375	26.3	<u>376</u>	<u>26.2</u>	376	26.2	301	32.7	<u>301</u>	<u>32.7</u>	302	32.6
470.lbm	<u>28.8</u>	<u>477</u>	28.8	477	28.6	480	<u>28.8</u>	<u>477</u>	28.8	477	28.6	480
481.wrf	147	76.1	146	76.6	<u>147</u>	<u>76.2</u>	147	76.1	146	76.6	<u>147</u>	<u>76.2</u>
482.sphinx3	377	51.6	381	51.2	<u>379</u>	<u>51.4</u>	377	51.6	381	51.2	<u>379</u>	<u>51.4</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Zone reclaim mode enabled with:

```
echo 1 > /proc/sys/vm/zone_reclaim_mode
```

Intel Idle Driver disabled with the following Linux kernel parameter in /etc/grub.conf:
intel_idle.max_cstate=0

Platform Notes

BIOS setting:

Operating Mode set to Maximum Performance

Sysinfo program /home/SPECCpu-20140116-ic14.0/config/sysinfo.rev6818

\$Rev: 6818 \$ \$Date::: 2012-07-17 ## e86d102572650a6e4d596a3cee98f191

running on x3550M4 Wed Aug 20 00:55:01 2014

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3550 M4
(Intel Xeon E5-2628L v2, 1.90 GHz)

SPECfp2006 = 74.3

SPECfp_base2006 = 71.0

CPU2006 license: 11

Test date: Aug-2014

Test sponsor: IBM Corporation

Hardware Availability: Dec-2013

Tested by: IBM Corporation

Software Availability: Sep-2013

Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2628L v2 @ 1.90GHz
        2 "physical id"s (chips)
        32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
    cpu cores : 8
    siblings : 16
    physical 0: cores 0 1 2 3 4 5 6 7
    physical 1: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB
```

```
From /proc/meminfo
MemTotal:      264463528 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.4 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux x3550M4 2.6.32-358.18.1.el6.x86_64 #1 SMP Fri Aug 2 17:04:38 EDT 2013
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Aug 19 17:01
```

```
SPEC is set to: /home/SPECcpu-20140116-ic14.0
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/vg_x3550m4-lv_home
                ext4   312G  209G   88G  71%  /home
```

```
Additional information from dmidecode:
BIOS IBM -[D7E139YUS-1.70]- 05/13/2014
Memory:
 8x Not Specified Not Specified
 16x Samsung M393B2G70QH0-CMA 16 GB 1600 MHz 2 rank
```

(End of data from sysinfo program)



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation	SPECfp2006 =	74.3
IBM System x3550 M4 (Intel Xeon E5-2628L v2, 1.90 GHz)	SPECfp_base2006 =	71.0
CPU2006 license: 11	Test date:	Aug-2014
Test sponsor: IBM Corporation	Hardware Availability:	Dec-2013
Tested by: IBM Corporation	Software Availability:	Sep-2013

General Notes

Environment variables set by runspec before the start of the run:

```
KMP_AFFINITY = "granularity=fine,compact,1,0"
LD_LIBRARY_PATH = "/home/SPECCpu-20140116-ic14.0/libs/32:/home/SPECCpu-20140116-ic14.0/libs/64:/home/SPECCpu-20140116-ic14.0/sh"
OMP_NUM_THREADS = "16"
```

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3550 M4
(Intel Xeon E5-2628L v2, 1.90 GHz)

SPECfp2006 = 74.3

SPECfp_base2006 = 71.0

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Aug-2014

Hardware Availability: Dec-2013

Software Availability: Sep-2013

Base Optimization Flags

C benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias
```

C++ benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias
```

Fortran benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
          -no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32  
          -ansi-alias
```

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3550 M4
(Intel Xeon E5-2628L v2, 1.90 GHz)

SPECfp2006 = 74.3

SPECfp_base2006 = 71.0

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Aug-2014

Hardware Availability: Dec-2013

Software Availability: Sep-2013

Peak Optimization Flags (Continued)

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll14 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll12
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll12
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc
-opt-malloc-options=3 -auto -unroll14

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-B.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-B.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3550 M4
(Intel Xeon E5-2628L v2, 1.90 GHz)

SPECfp2006 = 74.3

SPECfp_base2006 = 71.0

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Aug-2014

Hardware Availability: Dec-2013

Software Availability: Sep-2013

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Sep 10 16:12:57 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 9 September 2014.