



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B22 M3 (Intel Xeon E5-2450L v2, 1.70 GHz)

SPECfp®_rate2006 = 421

SPECfp_rate_base2006 = 411

CPU2006 license: 9019


Test date: Jul-2014

Test sponsor: Cisco Systems

Hardware Availability: Jun-2014

Tested by: Cisco Systems

Software Availability: Sep-2013

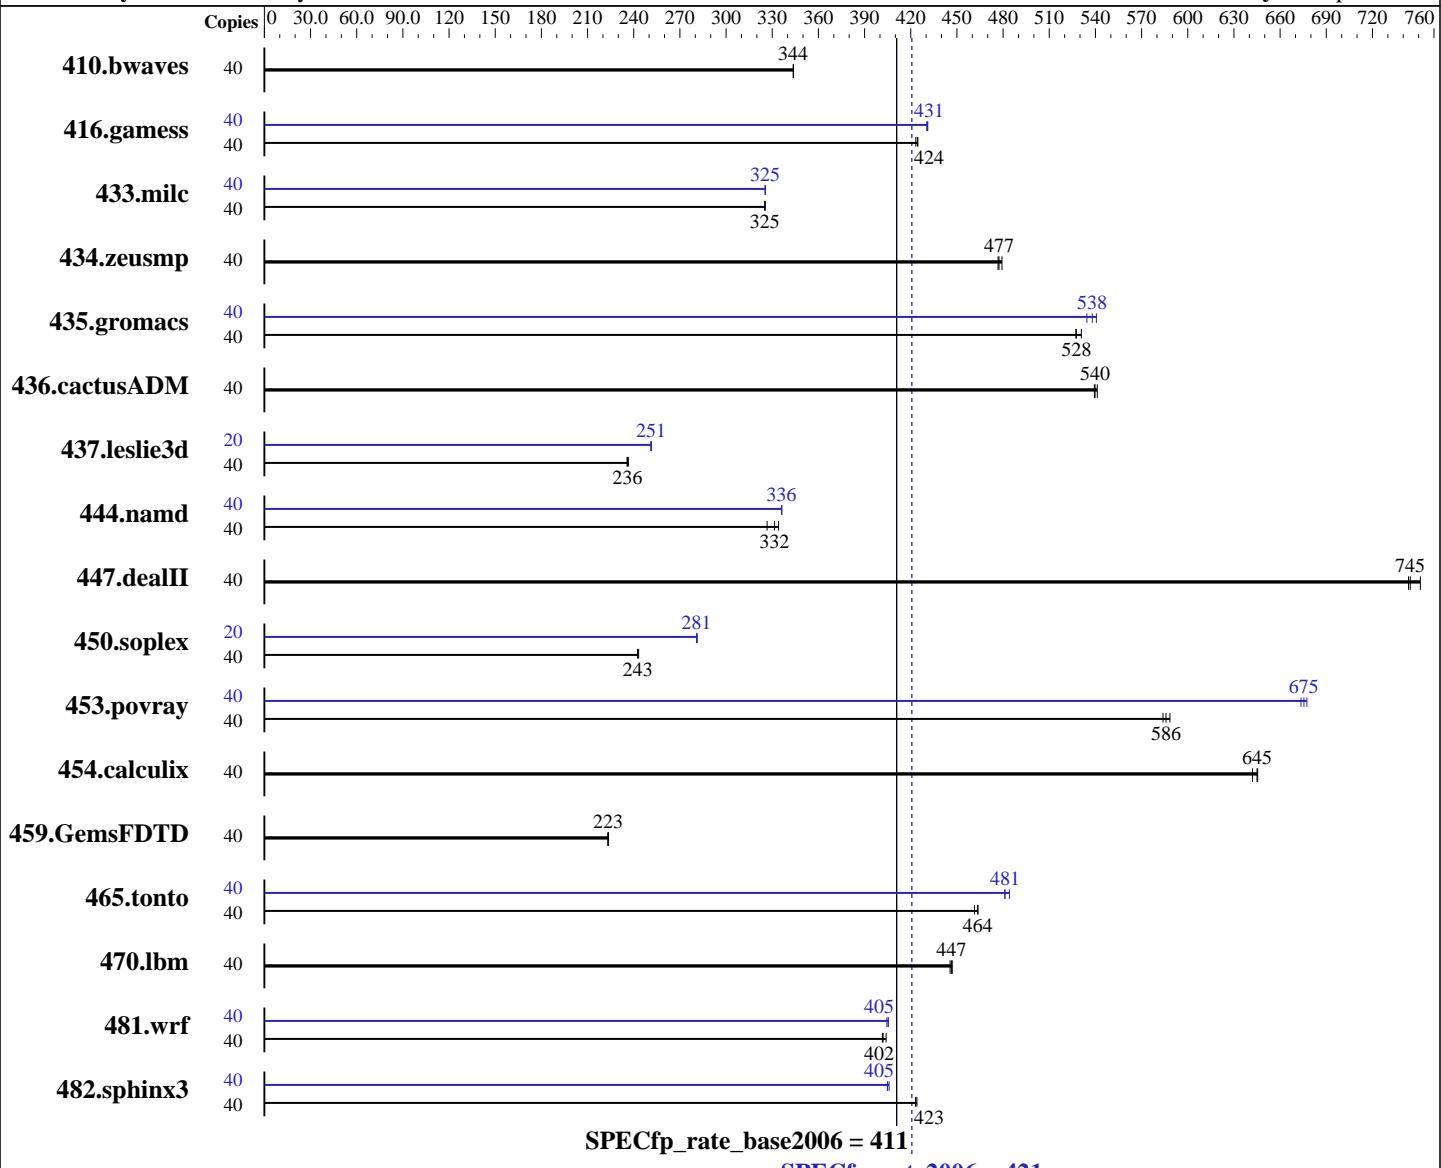

Hardware		Software	
CPU Name:	Intel Xeon E5-2450L v2	Operating System:	Red Hat Enterprise Linux Server release 6.5 (Santiago)
CPU Characteristics:	Intel Turbo Boost Technology up to 2.10 GHz		2.6.32-431.el6.x86_64
CPU MHz:	1700	Compiler:	C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;
FPU:	Integrated		Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
CPU(s) enabled:	20 cores, 2 chips, 10 cores/chip, 2 threads/core	Auto Parallel:	No
CPU(s) orderable:	1,2 chip	File System:	ext4
Primary Cache:	32 KB I + 32 KB D on chip per core	<i>Continued on next page</i>	
Secondary Cache:	256 KB I+D on chip per core		

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B22 M3 (Intel Xeon E5-2450L v2, 1.70 GHz)

SPECfp_rate2006 = 421

SPECfp_rate_base2006 = 411

CPU2006 license: 9019

Test date: Jul-2014

Test sponsor: Cisco Systems

Hardware Availability: Jun-2014

Tested by: Cisco Systems

Software Availability: Sep-2013

L3 Cache: 25 MB I+D on chip per chip
 Other Cache: None
 Memory: 96 GB (12 x 8 GB 2Rx4 PC3-12800R-11, ECC)
 Disk Subsystem: 1 X 146 GB 15000 RPM SAS
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	40	1582	344	<u>1582</u>	<u>344</u>	1581	344	40	1582	344	<u>1582</u>	<u>344</u>	1581	344
416.gamess	40	1844	425	<u>1846</u>	<u>424</u>	1850	423	40	1817	431	1820	430	<u>1818</u>	<u>431</u>
433.milc	40	1129	325	<u>1129</u>	<u>325</u>	1129	325	40	1128	325	<u>1128</u>	<u>325</u>	1128	325
434.zeusmp	40	759	479	764	477	<u>763</u>	<u>477</u>	40	759	479	764	477	<u>763</u>	<u>477</u>
435.gromacs	40	538	531	542	527	<u>541</u>	<u>528</u>	40	534	534	<u>531</u>	<u>538</u>	528	541
436.cactusADM	40	883	541	<u>886</u>	<u>540</u>	886	539	40	883	541	<u>886</u>	<u>540</u>	886	539
437.leslie3d	40	<u>1594</u>	<u>236</u>	1590	237	1595	236	20	748	251	749	251	<u>748</u>	<u>251</u>
444.namd	40	982	327	960	334	<u>968</u>	<u>332</u>	40	954	336	<u>954</u>	<u>336</u>	955	336
447.dealII	40	<u>615</u>	<u>745</u>	616	743	609	751	40	<u>615</u>	<u>745</u>	616	743	609	751
450.soplex	40	1376	242	<u>1374</u>	<u>243</u>	1372	243	20	594	281	593	281	<u>594</u>	<u>281</u>
453.povray	40	<u>363</u>	<u>586</u>	362	588	364	584	40	314	677	316	674	<u>315</u>	<u>675</u>
454.calculix	40	<u>512</u>	<u>645</u>	511	645	514	642	40	<u>512</u>	<u>645</u>	511	645	514	642
459.GemsFDTD	40	1898	224	<u>1900</u>	<u>223</u>	1902	223	40	1898	224	<u>1900</u>	<u>223</u>	1902	223
465.tonto	40	849	464	853	461	<u>849</u>	<u>464</u>	40	<u>818</u>	<u>481</u>	813	484	818	481
470.lbm	40	1233	446	<u>1231</u>	<u>447</u>	1230	447	40	1233	446	<u>1231</u>	<u>447</u>	1230	447
481.wrf	40	1113	402	1106	404	<u>1111</u>	<u>402</u>	40	1105	404	<u>1102</u>	<u>405</u>	1102	405
482.sphinx3	40	1843	423	<u>1842</u>	<u>423</u>	1839	424	40	1921	406	1926	405	<u>1925</u>	<u>405</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

Intel HT Technology = Enabled
 CPU performance set to HPC
 Power Technology set to Custom

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B22 M3 (Intel Xeon E5-2450L v2, 1.70 GHz)

SPECfp_rate2006 = 421

SPECfp_rate_base2006 = 411

CPU2006 license: 9019

Test date: Jul-2014

Test sponsor: Cisco Systems

Hardware Availability: Jun-2014

Tested by: Cisco Systems

Software Availability: Sep-2013

Platform Notes (Continued)

CPU Power State C6 set to Disabled

CPU Power State C1 Enhanced set to Disabled

Memory RAS configuration set to Maximum Performance

DRAM Clock Throttling Set to Performance

Sysinfo program /opt/cpu2006-1.4/config/sysinfo.rev6818
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191
running on B22M3 Wed Jul 23 09:08:50 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2450L v2 @ 1.70GHz
        2 "physical id"s (chips)
        40 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 10
siblings : 20
physical 0: cores 0 1 2 3 4 8 9 10 11 12
physical 1: cores 0 1 2 3 4 8 9 10 11 12
cache size : 25600 KB
```

```
From /proc/meminfo
MemTotal:      99004256 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.5 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux B22M3 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST 2013 x86_64
x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jul 22 15:26
```

```
SPEC is set to: /opt/cpu2006-1.4
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdal      ext4  134G   15G  114G  12%  /
```

Additional information from dmidecode:

BIOS Cisco Systems, Inc. B22M3.2.2.1.8.042120141915 04/21/2014

Memory:

12x 0xCE00 M393B1K70DH0-YK0 8 GB 1600 MHz 2 rank

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B22 M3 (Intel Xeon E5-2450L v2, 1.70 GHz)

SPECfp_rate2006 = 421

SPECfp_rate_base2006 = 411

CPU2006 license: 9019

Test date: Jul-2014

Test sponsor: Cisco Systems

Hardware Availability: Jun-2014

Tested by: Cisco Systems

Software Availability: Sep-2013

Platform Notes (Continued)

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/opt/cpu2006-1.4/libs/32:/opt/cpu2006-1.4/libs/64:/opt/cpu2006-1.4/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1> /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B22 M3 (Intel Xeon E5-2450L v2, 1.70 GHz)

SPECfp_rate2006 = 421

SPECfp_rate_base2006 = 411

CPU2006 license: 9019

Test date: Jul-2014

Test sponsor: Cisco Systems

Hardware Availability: Jun-2014

Tested by: Cisco Systems

Software Availability: Sep-2013

Base Portability Flags (Continued)

465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B22 M3 (Intel Xeon E5-2450L v2, 1.70 GHz)

SPECfp_rate2006 = 421

SPECfp_rate_base2006 = 411

CPU2006 license: 9019

Test date: Jul-2014

Test sponsor: Cisco Systems

Hardware Availability: Jun-2014

Tested by: Cisco Systems

Software Availability: Sep-2013

Peak Portability Flags (Continued)

```

416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

```

Peak Optimization Flags

C benchmarks:

```

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
           -prof-use(pass 2) -auto-ilp32

```

470.lbm: basepeak = yes

```

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -opt-mem-layout-trans=3
             -unroll2

```

C++ benchmarks:

```

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
           -prof-use(pass 2) -fno-alias -auto-ilp32

```

447.dealII: basepeak = yes

```

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
             -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
             -prof-use(pass 2) -opt-malloc-options=3

```

```

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
             -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
             -prof-use(pass 2) -unroll4 -ansi-alias

```

Fortran benchmarks:

410.bwaves: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B22 M3 (Intel Xeon E5-2450L v2, 1.70 GHz)

SPECfp_rate2006 = 421

SPECfp_rate_base2006 = 411

CPU2006 license: 9019

Test date: Jul-2014

Test sponsor: Cisco Systems

Hardware Availability: Jun-2014

Tested by: Cisco Systems

Software Availability: Sep-2013

Peak Optimization Flags (Continued)

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xAVX -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>
<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>
<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revB.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Sep 24 16:18:42 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 24 September 2014.