



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR 202 S5 (Intel Xeon E5-2620 v2, 2.10 GHz)

SPECint®_rate2006 = 431

SPECint_rate_base2006 = 415

CPU2006 license: 9008


Test sponsor: ACTION S.A.

Tested by: ACTION S.A.

Test date: Sep-2014

Hardware Availability: Oct-2013

Software Availability: Sep-2013

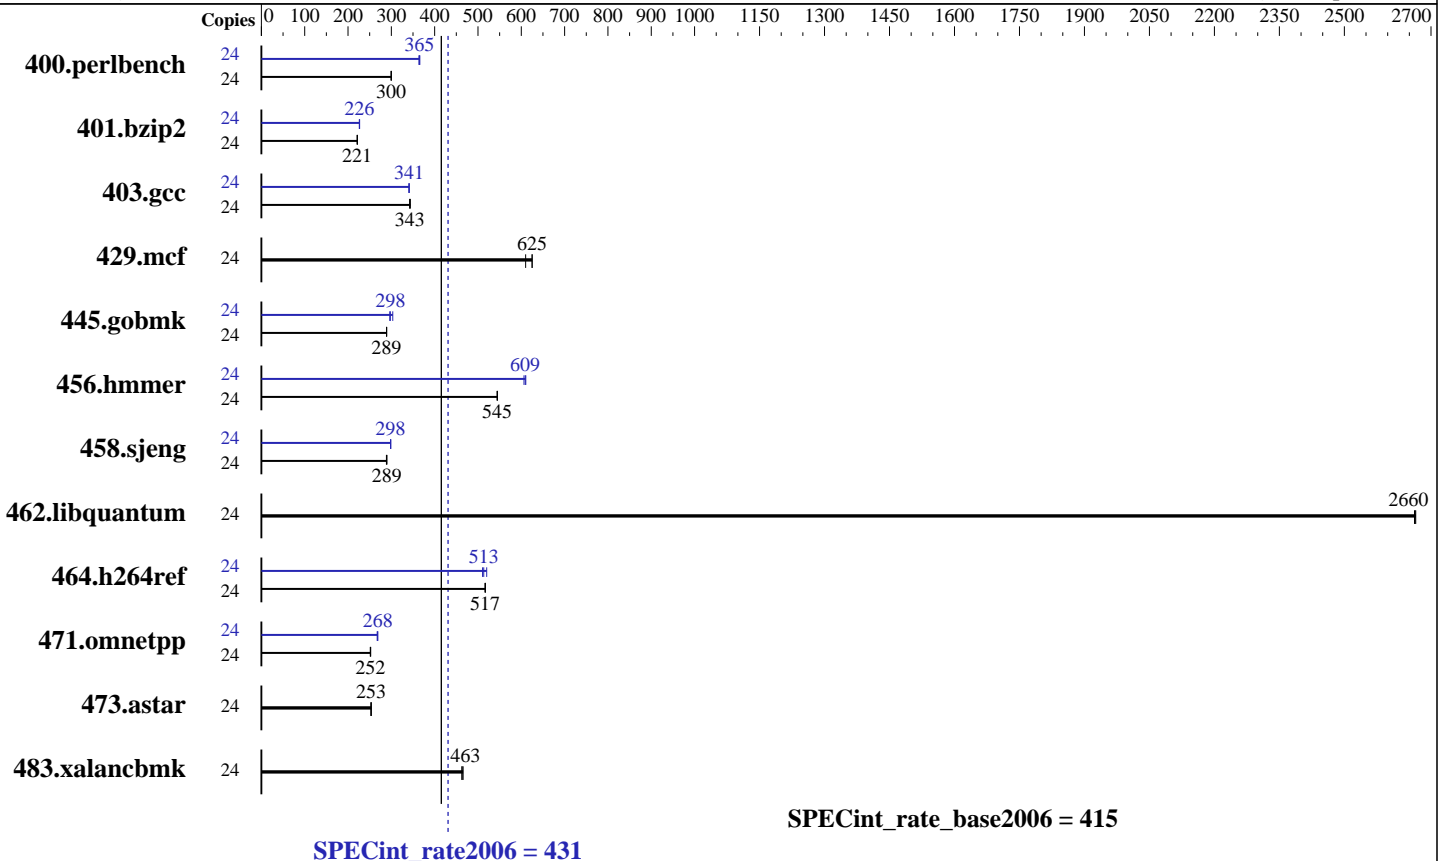

Hardware

CPU Name: Intel Xeon E5-2620 v2
 CPU Characteristics: Intel Turbo Boost Technology up to 2.60 GHz
 CPU MHz: 2100
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 15 MB I+D on chip per chip
 Other Cache: None
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3-14900R-13, ECC, running at 1600 MHz and CL11)
 Disk Subsystem: 1 x 240 GB SATA II SSD
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)
 2.6.32-358.11.1.el6.x86_64
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux
 Auto Parallel: No
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.0



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR 202 S5 (Intel Xeon E5-2620 v2, 2.10 GHz)

SPECint_rate2006 = 431

SPECint_rate_base2006 = 415

CPU2006 license: 9008
Test sponsor: ACTION S.A.
Tested by: ACTION S.A.

Test date: Sep-2014
Hardware Availability: Oct-2013
Software Availability: Sep-2013

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	782	300	<u>782</u>	<u>300</u>	783	299	24	641	366	645	364	<u>642</u>	<u>365</u>
401.bzip2	24	1045	222	<u>1046</u>	<u>221</u>	1047	221	24	1024	226	1021	227	<u>1023</u>	<u>226</u>
403.gcc	24	<u>564</u>	<u>343</u>	564	342	562	344	24	<u>566</u>	<u>341</u>	567	341	566	341
429.mcf	24	350	625	359	610	<u>350</u>	<u>625</u>	24	350	625	359	610	<u>350</u>	<u>625</u>
445.gobmk	24	871	289	<u>871</u>	<u>289</u>	871	289	24	850	296	830	303	<u>846</u>	<u>298</u>
456.hammer	24	<u>411</u>	<u>545</u>	411	544	411	545	24	369	606	<u>368</u>	<u>609</u>	367	610
458.sjeng	24	1003	290	1006	289	<u>1004</u>	<u>289</u>	24	973	299	973	298	<u>973</u>	<u>298</u>
462.libquantum	24	<u>187</u>	<u>2660</u>	187	2660	187	2660	24	<u>187</u>	<u>2660</u>	187	2660	187	2660
464.h264ref	24	1029	516	1027	517	<u>1027</u>	<u>517</u>	24	1021	520	<u>1035</u>	<u>513</u>	1040	511
471.omnetpp	24	<u>596</u>	<u>252</u>	594	252	597	251	24	558	269	561	267	<u>559</u>	<u>268</u>
473.astar	24	664	254	<u>665</u>	<u>253</u>	666	253	24	664	254	<u>665</u>	<u>253</u>	666	253
483.xalancbmk	24	<u>357</u>	<u>463</u>	356	466	358	463	24	<u>357</u>	<u>463</u>	356	466	358	463

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

Bios Settings
Power Technology = Custom
Energy Performance = Performance
Turbo Mode = Enabled
C1E Support = Disabled
CPU C3 Report = Disabled
CPU C6 Report = Disabled
Package C State Limit = No Limit

Sysinfo program /cpu2006.1.2/config/sysinfo.rev6818
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191
running on localhost.localdomain Wed Sep 3 11:18:35 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.

SPECint_rate2006 = 431

ACTINA SOLAR 202 S5 (Intel Xeon E5-2620 v2, 2.10 GHz)

SPECint_rate_base2006 = 415

CPU2006 license: 9008

Test date: Sep-2014

Test sponsor: ACTION S.A.

Hardware Availability: Oct-2013

Tested by: ACTION S.A.

Software Availability: Sep-2013

Platform Notes (Continued)

```

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2620 v2 @ 2.10GHz
 2 "physical id"s (chips)
24 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 6
  siblings  : 12
  physical 0: cores 0 1 2 3 4 5
  physical 1: cores 0 1 2 3 4 5
cache size : 15360 KB

```

```

From /proc/meminfo
MemTotal:      131951256 kB
HugePages_Total:    0
Hugepagesize:    2048 kB

```

```

/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.4 (Santiago)

```

```

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

```

```

uname -a:
Linux localhost.localdomain 2.6.32-358.11.1.el6.x86_64 #1 SMP Tue Nov 19
17:43:04 CET 2013 x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Sep 3 11:12

```

SPEC is set to: /cpu2006.1.2
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sdal        ext4      193G   56G  128G  31% /

```

```

Additional information from dmidecode:
BIOS American Megatrends Inc. 3.0a 02/11/2014
Memory:
16x      8 GB
14x Hynix Semiconducto HMT31GR7EFR4C 8 GB 1600 MHz 2 rank
2x Hynix Semiconductor HMT31GR7EFR4C- 8 GB 1600 MHz 2 rank

```

```

(End of data from sysinfo program)
dmidecode does not properly detect memory modules
16 modules of 8 GB were used to run the test (128 GB total)

```



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.

SPECint_rate2006 = 431

ACTINA SOLAR 202 S5 (Intel Xeon E5-2620 v2, 2.10 GHz)

SPECint_rate_base2006 = 415

CPU2006 license: 9008

Test date: Sep-2014

Test sponsor: ACTION S.A.

Hardware Availability: Oct-2013

Tested by: ACTION S.A.

Software Availability: Sep-2013

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/cpu2006.1.2/libs/32:/cpu2006.1.2/libs/64:/cpu2006.1.2/sh"

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1> /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

Binaries compiled on a system with 2x Xeon E5-2650 v2 chips + 256 GB memory using RedHat EL 6.4

Base Compiler Invocation

C benchmarks:

```
icc -m32
```

C++ benchmarks:

```
icpc -m32
```

Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LINUX_IA32
```

```
462.libquantum: -DSPEC_CPU_LINUX
```

```
483.xalancbmk: -DSPEC_CPU_LINUX
```

Base Optimization Flags

C benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
```

```
-Wl,-z,muldefs -L/cpu2006.1.2/sh -lsmartheap
```

Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.

SPECint_rate2006 = 431

ACTINA SOLAR 202 S5 (Intel Xeon E5-2620 v2, 2.10 GHz)

SPECint_rate_base2006 = 415

CPU2006 license: 9008

Test date: Sep-2014

Test sponsor: ACTION S.A.

Hardware Availability: Oct-2013

Tested by: ACTION S.A.

Software Availability: Sep-2013

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

401.bzip2: -DSPEC_CPU_LP64

456.hmmer: -DSPEC_CPU_LP64

458.sjeng: -DSPEC_CPU_LP64

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4 -auto-ilp32

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR 202 S5 (Intel Xeon E5-2620 v2, 2.10 GHz)

SPECint_rate2006 = 431

SPECint_rate_base2006 = 415

CPU2006 license: 9008

Test sponsor: ACTION S.A.

Tested by: ACTION S.A.

Test date: Sep-2014

Hardware Availability: Oct-2013

Software Availability: Sep-2013

Peak Optimization Flags (Continued)

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/cpu2006.1.2/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/ACTION.SA-Platform-Flags-RevB-apr-2014-For-Supermicro-Platform.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/ACTION.SA-Platform-Flags-RevB-apr-2014-For-Supermicro-Platform.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Sep 24 16:18:59 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 24 September 2014.