SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM Power E880 (4.35 GHz, 64 core)

SPECint®_rate2006 = 5400

SPECint_rate_base2006 = 4130

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Sep-2014
Hardware Availability: Nov-2014
Software Availability: Nov-2014

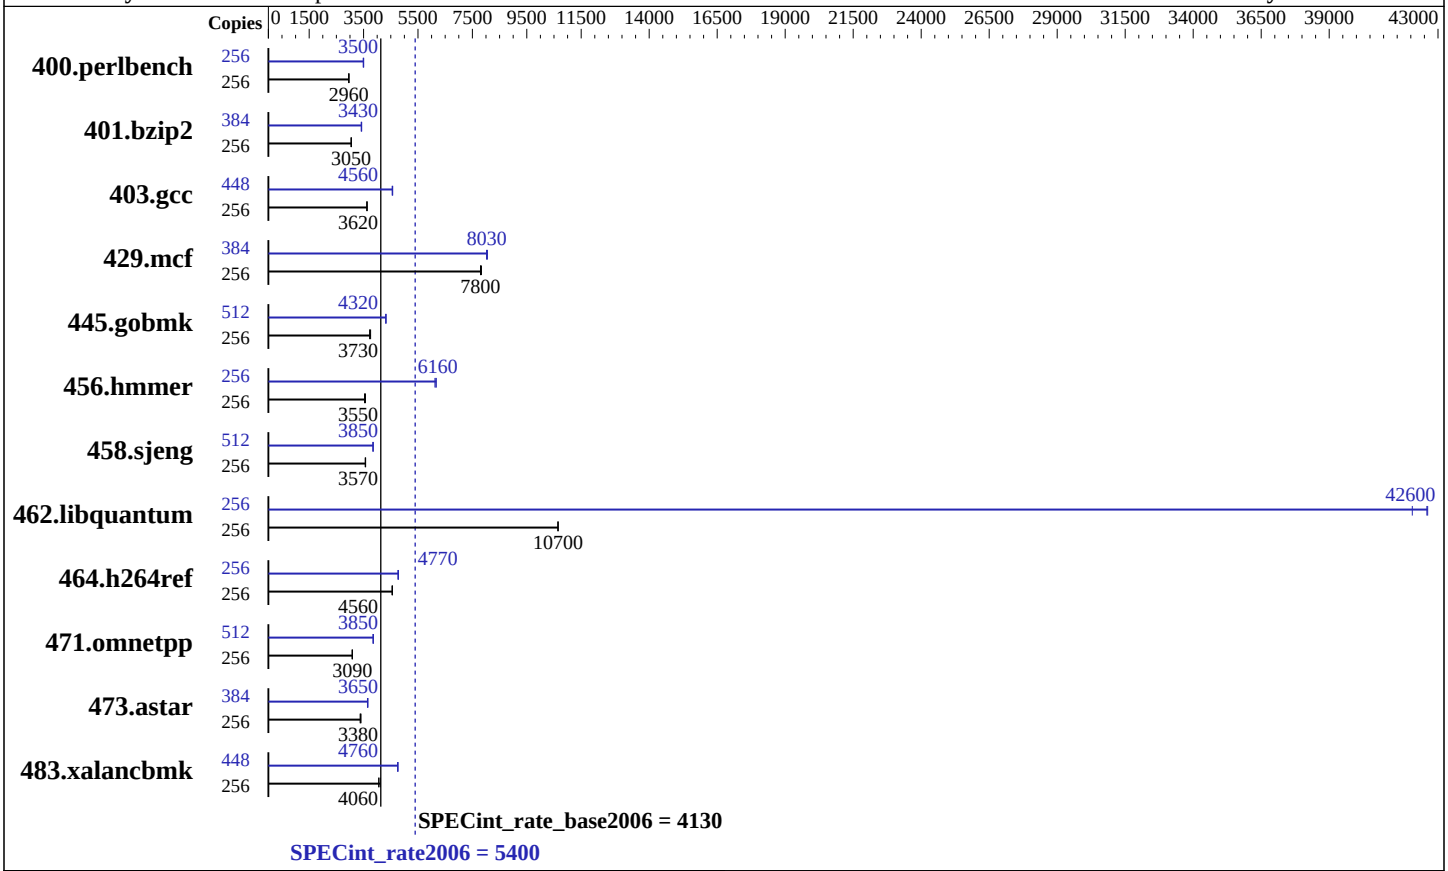

Hardware

CPU Name:	POWER8
CPU Characteristics:	Intelligent Energy Optimization enabled, up to 4.53 GHz
CPU MHz:	4359
FPU:	Integrated
CPU(s) enabled:	64 cores, 8 chips, 8 cores/chip, 8 threads/core
CPU(s) orderable:	4,8 Modules
Primary Cache:	32 KB I + 64 KB D on chip per core
Secondary Cache:	512 KB I+D on chip per core
L3 Cache:	8 MB I+D on chip per core
Other Cache:	16 MB I+D off chip per CDIMM
Memory:	2 TB (64 x 32 GB CDIMMs) DDR3 1600 MHz
Disk Subsystem:	7 x 300 GB 15K RPM SAS SFF-2 Raid5
Other Hardware:	None

Software

Operating System:	IBM AIX V7.1
Compiler:	C/C++: Version 13.1 of IBM XL C/C++ for AIX
Auto Parallel:	No
File System:	AIX/JFS2
System State:	Multi-user
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	None

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM Power E880 (4.35 GHz, 64 core)

SPECint_rate2006 = 5400

SPECint_rate_base2006 = 4130

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Sep-2014
Hardware Availability: Nov-2014
Software Availability: Nov-2014

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	256	**845**	**2960**	844	2960	847	2950	256	714	3500	717	3490	**715**	**3500**
401.bzip2	256	810	3050	813	3040	**811**	**3050**	384	**1082**	**3430**	1086	3410	1081	3430
403.gcc	256	**569**	**3620**	567	3630	569	3620	448	792	4550	**791**	**4560**	789	4570
429.mcf	256	**299**	**7800**	298	7830	299	7800	384	**436**	**8030**	437	8020	435	8050
445.gobmk	256	715	3760	**720**	**3730**	721	3730	512	**1244**	**4320**	1244	4320	1242	4320
456.hmmer	256	**673**	**3550**	669	3570	675	3540	256	**388**	**6160**	390	6120	387	6170
458.sjeng	256	866	3580	**868**	**3570**	870	3560	512	1611	3850	**1609**	**3850**	1608	3850
462.libquantum	256	498	10600	**498**	**10700**	498	10700	256	126	42100	**125**	**42600**	124	42600
464.h264ref	256	**1242**	**4560**	1242	4560	1247	4540	256	**1187**	**4770**	1189	4770	1185	4780
471.omnetpp	256	518	3090	519	3080	**518**	**3090**	512	**830**	**3850**	831	3850	829	3860
473.astar	256	528	3410	**531**	**3380**	532	3380	384	736	3660	**739**	**3650**	740	3640
483.xalancbmk	256	**435**	**4060**	435	4060	429	4110	448	649	4760	651	4750	**649**	**4760**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

```
C/C++ compiler updated to September 2014 PTF
      Version 13.01.0000.0001
```

Peak Tuning Notes

```
400.perlbench fdpr options: -O4 -m power8 -A 2 -rcl 2 -sls -dir -vrox
401.bzip2 fdpr options: -O4 -m power8 -A 2 -rcl 2 -sls -dir -vrox
403.gcc fdpr options: -O4 -m power8 -A 2 -rcl 2 -sls -dir -vrox
429.mcf fdpr options: -O4 -m power8 -A 2 -rcl 2 -sls -dir -vrox
456.hmmer fdpr options: -O4 -m power8 -A 2 -rcl 2 -sls -dir -vrox
458.sjeng fdpr options: -O4 -m power8 -A 2 -rcl 2 -sls -dir -vrox
462.libquantum fdpr options: -O4 -m power8 -A 2 -rcl 2 -sls -dir -vrox
464.h264ref fdpr options: -O4 -m power8 -A 2 -rcl 2 -sls -dir -vrox
471.omnetpp fdpr options: -O4 -m power8 -A 2 -rcl 2 -sls -dir -vrox
473.astar fdpr options: -O4 -m power8 -A 2 -rcl 2 -sls -dir -vrox
483.xalancbmk fdpr options: -O4 -m power8 -A 2 -rcl 2 -sls -dir -vrox
```

Submit Notes

```
The config file option 'submit' was used
to assign benchmark copy to specific kernel thread using
the "bindprocessor" command (see flags file for details).
```

Operating System Notes

```
AIX updated to V7.1 TL3 SP4

All ulimits set to unlimited.
Set 8 threads per core via "smtctl -t 8 -w boot"

51200 16M large pages defined with vmo command
```

General Notes

```
Environment variables set by runspec before the start of the run:
MALLOCOPTIONS = "pool"
MEMORY_AFFINITY = "MCM"
XLFRTEOPTS = "intrinthds=1"
```

Base Compiler Invocation

C benchmarks:
```
/opt/IBM/xlc/13.1.0/bin/xlc -qlanglvl=extc99
```

C++ benchmarks:
```
/opt/IBM/xlC/13.1.0/bin/xlC
```

Base Portability Flags

400.perlbench: `-DSPEC_CPU_AIX`
462.libquantum: `-DSPEC_CPU_AIX`
464.h264ref: `-DSPEC_CPU_AIX -qchars=signed`
483.xalancbmk: `-DSPEC_CPU_AIX`

Base Optimization Flags

C benchmarks:
```
-qinline=40 -qipa=threads -bmaxdata:0x50000000 -qlargepage -O5
-qvecnvol -D_ILS_MACROS -qalias=noansi -qalloca -blpdata
```

C++ benchmarks:
```
-qinline=40 -qipa=threads -bmaxdata:0x20000000 -qlargepage -O5
-qvecnvol -D_ILS_MACROS -qrtti=all -D__IBM_FAST_SET_MAP_ITERATOR
-blpdata
```

Base Other Flags

C benchmarks:
```
-qipa=noobject -qsuppress=1500-036
```

C++ benchmarks:
```
-qipa=noobject -qsuppress=1500-036
```

Peak Compiler Invocation

C benchmarks:
```
/opt/IBM/xlc/13.1.0/bin/xlc -qlanglvl=extc99
```

C++ benchmarks:
```
/opt/IBM/xlC/13.1.0/bin/xlC
```

Peak Portability Flags

400.perlbench: -DSPEC_CPU_AIX
403.gcc: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_AIX
464.h264ref: -DSPEC_CPU_AIX -qchars=signed
483.xalancbmk: -DSPEC_CPU_AIX

Peak Optimization Flags

C benchmarks:

400.perlbench: -qinline=40 -bmaxdata:0x50000000 -qpdf1(pass 1)
-qpdf2(pass 2) -O3 -qarch=auto -qtune=auto -D_ILS_MACROS
-qalias=noansi -qfdpr -blpdata -btextpsize:64K

401.bzip2: -qinline=40 -qipa=threads -bmaxdata:0x50000000
-qpdf1(pass 1) -qpdf2(pass 2) -O4 -qsimd=noauto
-qlargepage -D_ILS_MACROS -qfdpr -blpdata -btextpsize:64K

403.gcc: -qinline=40 -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2)
-O4 -qvecnvol -q64 -qlargepage -D_ILS_MACROS -qalloca
-qfdpr -blpdata -btextpsize:64K

429.mcf: -qinline=40 -qipa=threads -bmaxdata:0x50000000
-qpdf1(pass 1) -qpdf2(pass 2) -O5 -qvecnvol -qlargepage
-D_ILS_MACROS -qfdpr -blpdata -btextpsize:64K

445.gobmk: -qinline=40 -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2)
-O5 -qvecnvol -qlargepage -D_ILS_MACROS -blpdata
-btextpsize:64K

Continued on next page

Peak Optimization Flags (Continued)

456.hmmer: -qinline=40 -qipa=threads -O5 -qvecnvol -qlargepage
-qassert=refalign -D_ILS_MACROS -qfdpr -blpdata
-btextpsize:64K

458.sjeng: -qinline=40 -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2)
-O3 -qarch=auto -qtune=auto -D_ILS_MACROS -qfdpr
-blpdata -btextpsize:64K

462.libquantum: -qinline=40 -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2)
-O5 -qsimd=noauto -qinline=400 -q64 -qlargepage
-D_ILS_MACROS -qfdpr -blpdata -btextpsize:64K

464.h264ref: -qinline=40 -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2)
-O5 -qvecnvol -qprefetch=dscr=84 -D_ILS_MACROS -qfdpr
-blpdata -btextpsize:64K

C++ benchmarks:

471.omnetpp: -qinline=40 -qipa=threads -bmaxdata:0x20000000
-qpdf1(pass 1) -qpdf2(pass 2) -O5 -qsimd=noauto
-qarch=pwr7 -qtune=pwr7 -D_ILS_MACROS -qfdpr
-qalign=natural -qrtti=all -qinlglue
-D__IBM_FAST_SET_MAP_ITERATOR -blpdata -btextpsize:64K

473.astar: -qinline=40 -qipa=threads -bmaxdata:0x20000000
-qpdf1(pass 1) -qpdf2(pass 2) -O5 -qvecnvol -qlargepage
-D_ILS_MACROS -qfdpr -qinlglue -qalign=natural -blpdata
-btextpsize:64K

483.xalancbmk: -qinline=40 -qipa=threads -bmaxdata:0x20000000
-qpdf1(pass 1) -qpdf2(pass 2) -O3 -qarch=auto -qtune=auto
-qsimd -qvecnvol -qlargepage -qprefetch=dscr=84
-D_ILS_MACROS -qfdpr -qinlglue -D__IBM_FAST_VECTOR
-blpdata -btextpsize:64K

Peak Other Flags

C benchmarks (except as noted below):
-qipa=noobject -qsuppress=1500-036

400.perlbench: -qsuppress=1500-036

C++ benchmarks:
-qipa=noobject -qsuppress=1500-036

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/IBM-XL.V13.html
http://www.spec.org/cpu2006/flags/IBM-AIX.V7.html

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2006/flags/IBM-XL.V13.xml
http://www.spec.org/cpu2006/flags/IBM-AIX.V7.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Oct 21 15:48:21 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 21 October 2014.