



SPEC[®] CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECint[®]_rate2006 = 1370

IBM Flex System x240 M5
(Intel Xeon E5-2699 v3, 2.30 GHz)

SPECint_rate_base2006 = 1330

CPU2006 license: 9017


Test date: Sep-2014

Test sponsor: Lenovo Group Limited

Hardware Availability: Dec-2014

Tested by: Lenovo Group Limited

Software Availability: Nov-2013

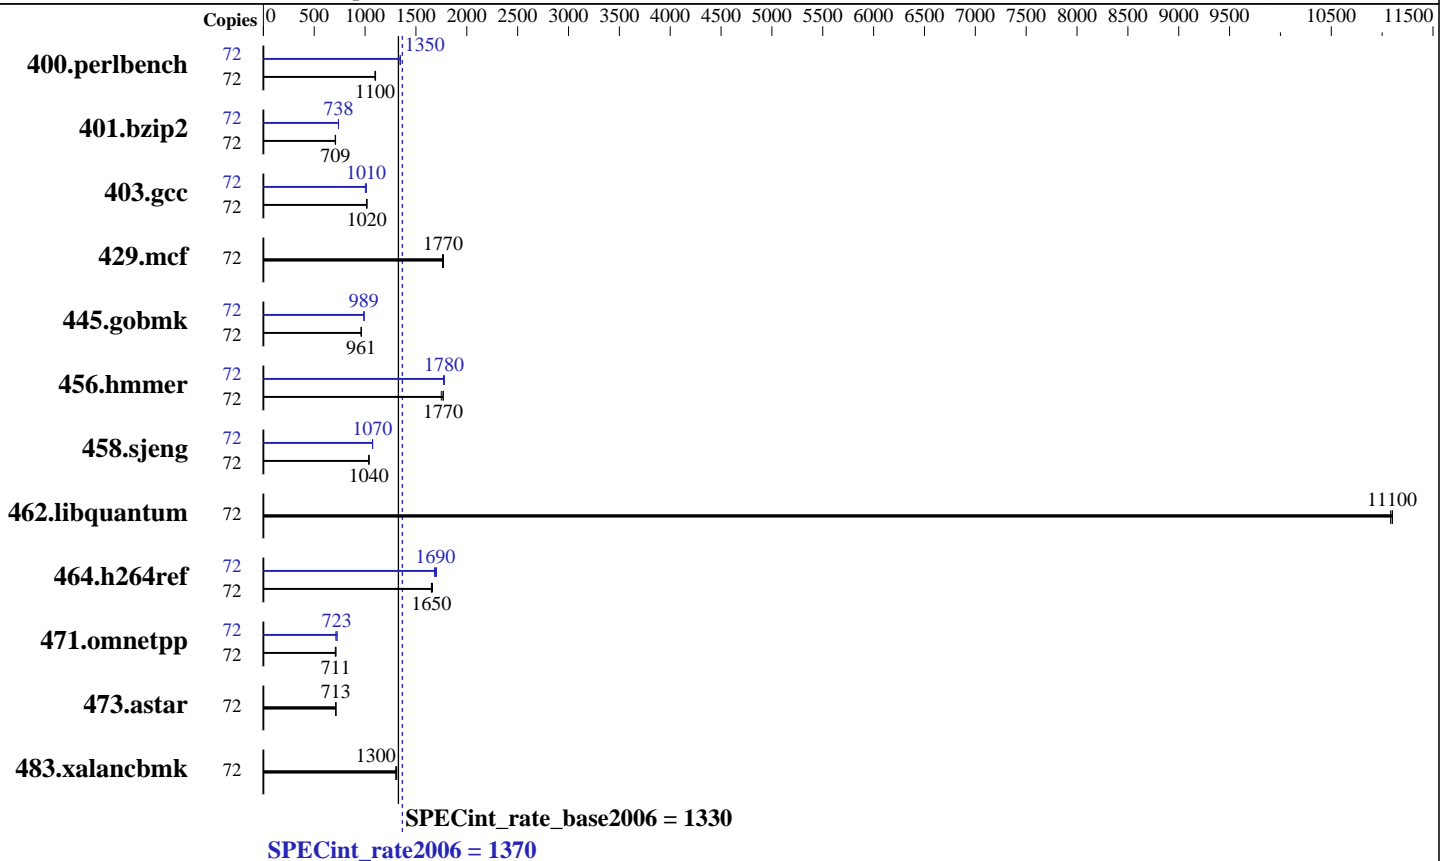

Hardware

CPU Name: Intel Xeon E5-2699 v3
 CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz
 CPU MHz: 2300
 FPU: Integrated
 CPU(s) enabled: 36 cores, 2 chips, 18 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 45 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)
 Disk Subsystem: 1 x 1 TB SAS, 7200 RPM
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)
 2.6.32-424.el6.x86_64
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux
 Auto Parallel: No
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.0



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECint_rate2006 = 1370

IBM Flex System x240 M5
(Intel Xeon E5-2699 v3, 2.30 GHz)

SPECint_rate_base2006 = 1330

CPU2006 license: 9017

Test date: Sep-2014

Test sponsor: Lenovo Group Limited

Hardware Availability: Dec-2014

Tested by: Lenovo Group Limited

Software Availability: Nov-2013

Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	72	638	1100	641	1100	<u>639</u>	<u>1100</u>	72	524	1340	522	1350	<u>522</u>	<u>1350</u>
401.bzip2	72	979	710	983	707	<u>981</u>	<u>709</u>	72	940	739	941	738	<u>941</u>	<u>738</u>
403.gcc	72	572	1010	569	1020	<u>569</u>	<u>1020</u>	72	573	1010	578	1000	<u>574</u>	<u>1010</u>
429.mcf	72	373	1760	371	1770	<u>372</u>	<u>1770</u>	72	373	1760	371	1770	<u>372</u>	<u>1770</u>
445.gobmk	72	783	965	786	961	<u>786</u>	<u>961</u>	72	762	991	765	987	<u>764</u>	<u>989</u>
456.hammer	72	380	1770	384	1750	<u>380</u>	<u>1770</u>	72	379	1770	<u>378</u>	<u>1780</u>	377	1780
458.sjeng	72	839	1040	840	1040	<u>840</u>	<u>1040</u>	72	812	1070	811	1070	<u>811</u>	<u>1070</u>
462.libquantum	72	135	11100	<u>134</u>	<u>11100</u>	134	11100	72	135	11100	<u>134</u>	<u>11100</u>	134	11100
464.h264ref	72	958	1660	<u>964</u>	<u>1650</u>	965	1650	72	947	1680	936	1700	<u>941</u>	<u>1690</u>
471.omnetpp	72	<u>633</u>	<u>711</u>	631	714	636	707	72	632	712	621	725	<u>622</u>	<u>723</u>
473.astar	72	708	713	<u>708</u>	<u>713</u>	712	710	72	708	713	<u>708</u>	<u>713</u>	712	710
483.xalancbmk	72	379	1310	<u>381</u>	<u>1300</u>	381	1300	72	379	1310	<u>381</u>	<u>1300</u>	381	1300

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

Operating Mode set to Efficiency - Favor Performance in BIOS
Sysinfo program /home/cpu2006.1.2/config/sysinfo.rev6818
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191
running on bonneville Tue Sep 30 13:43:52 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2699 v3 @ 2.30GHz
2 "physical id"s (chips)
72 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 18

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECint_rate2006 = 1370

IBM Flex System x240 M5
(Intel Xeon E5-2699 v3, 2.30 GHz)

SPECint_rate_base2006 = 1330

CPU2006 license: 9017

Test date: Sep-2014

Test sponsor: Lenovo Group Limited

Hardware Availability: Dec-2014

Tested by: Lenovo Group Limited

Software Availability: Nov-2013

Platform Notes (Continued)

```

siblings      : 36
physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
cache size   : 23040 KB

```

From /proc/meminfo

```

MemTotal:      263985488 kB
HugePages_Total: 0
Hugepagesize:  2048 kB

```

/usr/bin/lsc_release -d

Red Hat Enterprise Linux Server release 6.5 Beta (Santiago)

From /etc/*release* /etc/*version*

```

redhat-release: Red Hat Enterprise Linux Server release 6.5 Beta (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.5 Beta (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:beta:server

```

uname -a:

```

Linux bonneville 2.6.32-424.el6.x86_64 #1 SMP Mon Oct 14 20:11:50 EDT 2013
x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Sep 30 13:42 last=5

SPEC is set to: /home/cpu2006.1.2

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/vg_bonneville-lv_home	ext4	836G	5.4G	788G	1%	/home

Additional information from dmidecode:

```

BIOS IBM -[C4E101SUS-1.00]- 08/28/2014
Memory:
8x NO DIMM Unknown
16x Samsung M393A2G40DB0-CPB 16 GB 2133 MHz 2 rank

```

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/home/cpu2006.1.2/libs/32:/home/cpu2006.1.2/libs/64:/home/cpu2006.1.2/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECint_rate2006 = 1370

IBM Flex System x240 M5
(Intel Xeon E5-2699 v3, 2.30 GHz)

SPECint_rate_base2006 = 1330

CPU2006 license: 9017

Test date: Sep-2014

Test sponsor: Lenovo Group Limited

Hardware Availability: Dec-2014

Tested by: Lenovo Group Limited

Software Availability: Nov-2013

Base Compiler Invocation

C benchmarks:

icc -m32

C++ benchmarks:

icpc -m32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECint_rate2006 = 1370

IBM Flex System x240 M5
(Intel Xeon E5-2699 v3, 2.30 GHz)

SPECint_rate_base2006 = 1330

CPU2006 license: 9017

Test date: Sep-2014

Test sponsor: Lenovo Group Limited

Hardware Availability: Dec-2014

Tested by: Lenovo Group Limited

Software Availability: Nov-2013

Peak Compiler Invocation (Continued)

C++ benchmarks:
icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32
401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias
403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div
429.mcf: basepeak = yes
445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -opt-mem-layout-trans=3
456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4 -auto-ilp32
462.libquantum: basepeak = yes
464.h264ref: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

C++ benchmarks:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECint_rate2006 = 1370

IBM Flex System x240 M5
(Intel Xeon E5-2699 v3, 2.30 GHz)

SPECint_rate_base2006 = 1330

CPU2006 license: 9017

Test date: Sep-2014

Test sponsor: Lenovo Group Limited

Hardware Availability: Dec-2014

Tested by: Lenovo Group Limited

Software Availability: Nov-2013

Peak Optimization Flags (Continued)

```
471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
             -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
             -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
             -L/sh -lsmartheap
```

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-HSW-B.20141021.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-HSW-B.20141021.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Oct 21 15:48:40 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 21 October 2014.