



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6028R-TR  
(X10DRi, Intel Xeon E5-2697 v3)

SPECfp<sup>®</sup>2006 = 114

SPECfp\_base2006 = 109

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Oct-2014

Hardware Availability: Sep-2014

Software Availability: Nov-2013

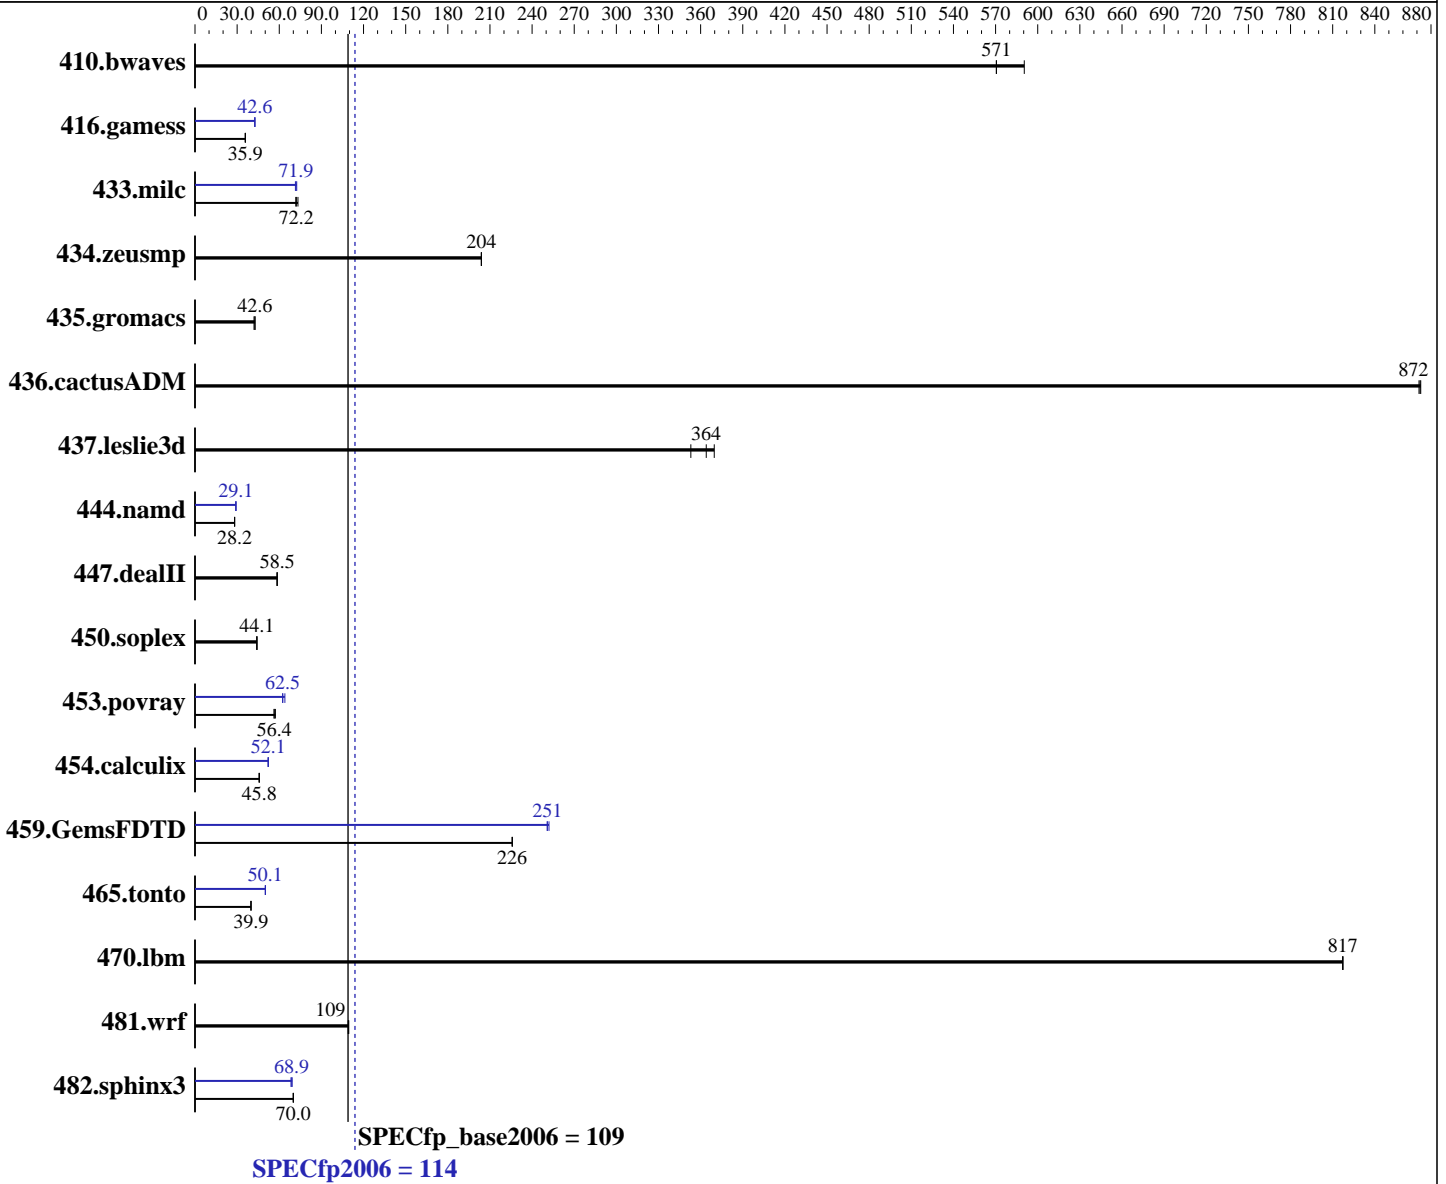

### Hardware

CPU Name: Intel Xeon E5-2697 v3  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz  
 CPU MHz: 2600  
 FPU: Integrated  
 CPU(s) enabled: 28 cores, 2 chips, 14 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.5,  
Kernel 2.6.32-431.el6.x86\_64  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE  
for Linux;  
Fortran: Version 14.0.0.080 of Intel Fortran  
Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext4  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6028R-TR  
(X10DRi, Intel Xeon E5-2697 v3)

SPECfp2006 = 114

SPECfp\_base2006 = 109

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Oct-2014

Hardware Availability: Sep-2014

Software Availability: Nov-2013

L3 Cache: 35 MB I+D on chip per chip  
Other Cache: None  
Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)  
Disk Subsystem: 1 x 2000 GB SATA III, 7200 RPM  
Other Hardware: None

Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	23.0	590	<b><u>23.8</u></b>	<b><u>571</u></b>	23.8	571	23.0	590	<b><u>23.8</u></b>	<b><u>571</u></b>	23.8	571
416.gamess	<b><u>546</u></b>	<b><u>35.9</u></b>	546	35.9	548	35.8	<b><u>459</u></b>	<b><u>42.6</u></b>	460	42.6	459	42.6
433.milc	125	73.3	128	71.8	<b><u>127</u></b>	<b><u>72.2</u></b>	<b><u>128</u></b>	<b><u>71.9</u></b>	127	72.4	128	71.5
434.zeusmp	44.6	204	<b><u>44.6</u></b>	<b><u>204</u></b>	44.6	204	44.6	204	<b><u>44.6</u></b>	<b><u>204</u></b>	44.6	204
435.gromacs	167	42.8	<b><u>168</u></b>	<b><u>42.6</u></b>	170	42.0	167	42.8	<b><u>168</u></b>	<b><u>42.6</u></b>	170	42.0
436.cactusADM	13.7	871	<b><u>13.7</u></b>	<b><u>872</u></b>	13.7	873	13.7	871	<b><u>13.7</u></b>	<b><u>872</u></b>	13.7	873
437.leslie3d	26.6	353	<b><u>25.8</u></b>	<b><u>364</u></b>	25.4	370	26.6	353	<b><u>25.8</u></b>	<b><u>364</u></b>	25.4	370
444.namd	284	28.2	<b><u>284</u></b>	<b><u>28.2</u></b>	284	28.2	275	29.1	<b><u>275</u></b>	<b><u>29.1</u></b>	275	29.1
447.dealII	196	58.5	<b><u>196</u></b>	<b><u>58.5</u></b>	196	58.5	196	58.5	<b><u>196</u></b>	<b><u>58.5</u></b>	196	58.5
450.soplex	190	44.0	<b><u>189</u></b>	<b><u>44.1</u></b>	189	44.1	190	44.0	<b><u>189</u></b>	<b><u>44.1</u></b>	189	44.1
453.povray	92.9	57.2	94.4	56.3	<b><u>94.4</u></b>	<b><u>56.4</u></b>	83.1	64.0	<b><u>85.1</u></b>	<b><u>62.5</u></b>	85.3	62.4
454.calculix	180	45.8	<b><u>180</u></b>	<b><u>45.8</u></b>	181	45.7	158	52.2	<b><u>158</u></b>	<b><u>52.1</u></b>	158	52.1
459.GemsFDTD	47.0	226	<b><u>47.0</u></b>	<b><u>226</u></b>	47.0	226	42.3	251	42.1	252	<b><u>42.3</u></b>	<b><u>251</u></b>
465.tonto	247	39.9	<b><u>247</u></b>	<b><u>39.9</u></b>	247	39.8	196	50.1	<b><u>196</u></b>	<b><u>50.1</u></b>	196	50.1
470.lbm	16.8	817	<b><u>16.8</u></b>	<b><u>817</u></b>	16.8	817	16.8	817	<b><u>16.8</u></b>	<b><u>817</u></b>	16.8	817
481.wrf	<b><u>102</u></b>	<b><u>109</u></b>	102	109	102	109	<b><u>102</u></b>	<b><u>109</u></b>	102	109	102	109
482.sphinx3	<b><u>278</u></b>	<b><u>70.0</u></b>	279	69.9	278	70.0	285	68.3	282	69.2	<b><u>283</u></b>	<b><u>68.9</u></b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Settings:  
Hyper-Threading (All) = Disabled  
Early Snoop = Disabled  
Enforce POR = Disabled  
COD Enabled = Disabled



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6028R-TR  
(X10DRi, Intel Xeon E5-2697 v3)

SPECfp2006 = 114

SPECfp\_base2006 = 109

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Oct-2014  
Hardware Availability: Sep-2014  
Software Availability: Nov-2013

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact,0,1"

LD\_LIBRARY\_PATH = "/home/Trial/SPEC2006\_v11/libs/32:/home/Trial/SPEC2006\_v11/libs/64:/home/Trial/SPEC2006\_v11/sh"

OMP\_NUM\_THREADS = "28"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB  
memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6028R-TR  
(X10DRi, Intel Xeon E5-2697 v3)

SPECfp2006 = 114

SPECfp\_base2006 = 109

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Oct-2014  
Hardware Availability: Sep-2014  
Software Availability: Nov-2013

## Base Optimization Flags

C benchmarks:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch  
-ansi-alias

C++ benchmarks:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

Fortran benchmarks:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch

Benchmarks using both Fortran and C:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch  
-ansi-alias

## Peak Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32 -ansi-alias

470.lbm: basepeak = yes

482.sphinx3: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -ansi-alias  
-parallel

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6028R-TR  
(X10DRi, Intel Xeon E5-2697 v3)

SPECfp2006 = 114

SPECfp\_base2006 = 109

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Oct-2014  
Hardware Availability: Sep-2014  
Software Availability: Nov-2013

## Peak Optimization Flags (Continued)

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-fno-alias -auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4  
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-inline-calloc -opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>  
<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revD.html>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6028R-TR  
(X10DRi, Intel Xeon E5-2697 v3)

SPECfp2006 = 114

SPECfp\_base2006 = 109

**CPU2006 license:** 001176

**Test sponsor:** Supermicro

**Tested by:** Supermicro

**Test date:** Oct-2014

**Hardware Availability:** Sep-2014

**Software Availability:** Nov-2013

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revD.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Wed Nov 12 10:17:31 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 7 November 2014.