



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Lenovo Group Limited

IBM System x iDataPlex dx360 M4  
(Intel Xeon E5-2690 v2, 3.00 GHz)

**SPECfp®2006 = 108**

**SPECfp\_base2006 = 104**

CPU2006 license: 9017


Test sponsor: Lenovo Group Limited

Tested by: IBM Corporation

Test date: Oct-2014

Hardware Availability: Dec-2013

Software Availability: Sep-2013

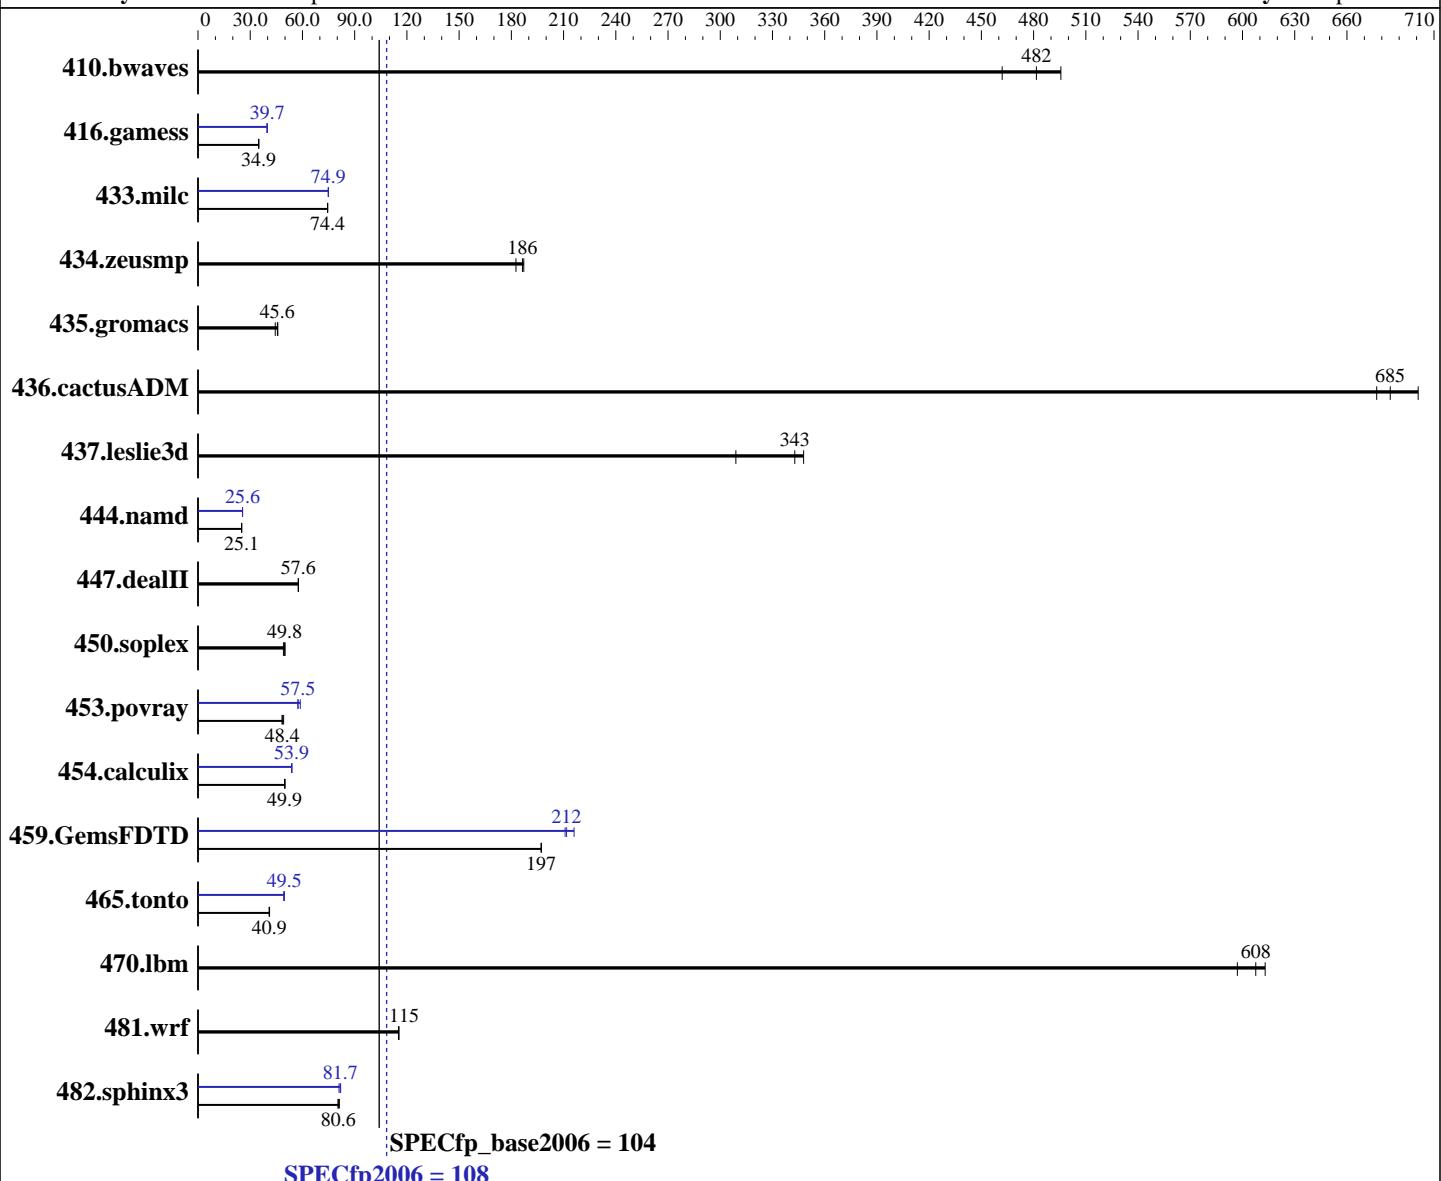

### Hardware

CPU Name: Intel Xeon E5-2690 v2  
CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz  
CPU MHz: 3000  
FPU: Integrated  
CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip  
CPU(s) orderable: 1,2 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core

### Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)  
Compiler: 2.6.32-358.el6.x86\_64  
C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;  
Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux  
Auto Parallel: Yes  
File System: ext4

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Lenovo Group Limited

IBM System x iDataPlex dx360 M4  
(Intel Xeon E5-2690 v2, 3.00 GHz)

**SPECfp2006 = 108**

**SPECfp\_base2006 = 104**

**CPU2006 license:** 9017

**Test date:** Oct-2014

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Dec-2013

**Tested by:** IBM Corporation

**Software Availability:** Sep-2013

L3 Cache: 25 MB I+D on chip per chip  
Other Cache: None  
Memory: 256 GB (16 x 16 GB 2Rx4 PC3-14900R-13, ECC)  
Disk Subsystem: 1 x 500 GB SATA, 7200 RPM  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	29.4	462	<b>28.2</b>	<b>482</b>	27.4	496	29.4	462	<b>28.2</b>	<b>482</b>	27.4	496
416.gamess	561	34.9	<b>561</b>	<b>34.9</b>	561	34.9	493	39.7	<b>493</b>	<b>39.7</b>	493	39.7
433.milc	123	74.5	123	74.4	<b>123</b>	<b>74.4</b>	<b>123</b>	<b>74.9</b>	123	74.8	123	74.9
434.zeusmp	48.6	187	<b>48.8</b>	<b>186</b>	49.8	183	48.6	187	<b>48.8</b>	<b>186</b>	49.8	183
435.gromacs	<b>157</b>	<b>45.6</b>	156	45.9	161	44.4	<b>157</b>	<b>45.6</b>	156	45.9	161	44.4
436.cactusADM	<b>17.4</b>	<b>685</b>	17.6	677	17.0	701	<b>17.4</b>	<b>685</b>	17.6	677	17.0	701
437.leslie3d	30.4	309	<b>27.4</b>	<b>343</b>	27.0	348	30.4	309	<b>27.4</b>	<b>343</b>	27.0	348
444.namd	320	25.1	320	25.1	<b>320</b>	<b>25.1</b>	<b>313</b>	<b>25.6</b>	314	25.6	313	25.6
447.dealII	198	57.7	<b>199</b>	<b>57.6</b>	199	57.6	198	57.7	<b>199</b>	<b>57.6</b>	199	57.6
450.soplex	167	50.0	<b>168</b>	<b>49.8</b>	170	49.1	<b>167</b>	<b>50.0</b>	<b>168</b>	<b>49.8</b>	170	49.1
453.povray	110	48.3	108	49.2	<b>110</b>	<b>48.4</b>	90.5	58.8	92.7	57.4	<b>92.6</b>	<b>57.5</b>
454.calculix	165	49.9	<b>165</b>	<b>49.9</b>	166	49.8	153	53.8	<b>153</b>	<b>53.9</b>	153	53.9
459.GemsFDTD	53.8	197	<b>53.8</b>	<b>197</b>	53.8	197	<b>50.1</b>	<b>212</b>	50.3	211	49.1	216
465.tonto	239	41.1	241	40.9	<b>240</b>	<b>40.9</b>	200	49.3	199	49.6	<b>199</b>	<b>49.5</b>
470.lbm	<b>22.6</b>	<b>608</b>	23.0	597	22.4	613	<b>22.6</b>	<b>608</b>	23.0	597	22.4	613
481.wrf	<b>96.8</b>	<b>115</b>	96.8	115	97.0	115	<b>96.8</b>	<b>115</b>	96.8	115	97.0	115
482.sphinx3	242	80.5	240	81.2	<b>242</b>	<b>80.6</b>	<b>241</b>	<b>81.0</b>	238	81.9	<b>239</b>	<b>81.7</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Zone reclaim mode enabled with:

```
echo 1 > /proc/sys/vm/zone_reclaim_mode
```

Intel Idle Driver disabled with the following Linux kernel parameter in /etc/grub.conf:  
intel\_idle.max\_cstate=0

## Platform Notes

BIOS setting:

Operating Mode set to Maximum Performance

Hyper-Threading set to Disable

Sysinfo program /home/SPECcpu-20140116-ic14.0/config/sysinfo.rev6874

\$Rev: 6874 \$ \$Date::: 2013-11-20 ## 654bd3fcf53b06faef0efe54ed011998

running on dx360M4 Tue Oct 7 21:10:20 2014

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Lenovo Group Limited

IBM System x iDataPlex dx360 M4  
(Intel Xeon E5-2690 v2, 3.00 GHz)

**SPECfp2006 =**

**108**

**SPECfp\_base2006 =**

**104**

**CPU2006 license:** 9017

**Test date:** Oct-2014

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Dec-2013

**Tested by:** IBM Corporation

**Software Availability:** Sep-2013

## Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2690 v2 @ 3.00GHz
        2 "physical id"s (chips)
        20 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
    cpu cores : 10
    siblings : 10
    physical 0: cores 0 1 2 3 4 8 9 10 11 12
    physical 1: cores 0 1 2 3 4 8 9 10 11 12
cache size : 25600 KB
```

```
From /proc/meminfo
MemTotal:      264642980 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.4 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux dx360M4 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41 EST 2013
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Oct 5 17:27
```

```
SPEC is set to: /home/SPECcpu-20140116-ic14.0
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/vg_td2-lv_home
                  ext4   380G  174G  187G  49%  /home
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS IBM -[TDE139OUS-1.50]- 02/21/2014

Memory:

16x Samsung M393B2G70QH0-CMA 16 GB 2 rank 1866 MHz, configured at 1867 MHz

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Lenovo Group Limited

IBM System x iDataPlex dx360 M4  
(Intel Xeon E5-2690 v2, 3.00 GHz)

**SPECfp2006 =** 108

**SPECfp\_base2006 =** 104

**CPU2006 license:** 9017

**Test date:** Oct-2014

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Dec-2013

**Tested by:** IBM Corporation

**Software Availability:** Sep-2013

## Platform Notes (Continued)

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact,0,1"

LD\_LIBRARY\_PATH = "/home/SPECcpu-20140116-ic14.0/libs/32:/home/SPECcpu-20140116-ic14.0/libs/64:/home/SPECcpu-20140116-ic14.0/sh"

OMP\_NUM\_THREADS = "20"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```

## Base Compiler Invocation

C benchmarks:

    icc -m64

C++ benchmarks:

    icpc -m64

Fortran benchmarks:

    ifort -m64

Benchmarks using both Fortran and C:

    icc -m64 ifort -m64

## Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
    465.tonto: -DSPEC_CPU_LP64
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Lenovo Group Limited

IBM System x iDataPlex dx360 M4  
(Intel Xeon E5-2690 v2, 3.00 GHz)

**SPECfp2006 =** 108

**SPECfp\_base2006 =** 104

**CPU2006 license:** 9017

**Test sponsor:** Lenovo Group Limited

**Tested by:** IBM Corporation

**Test date:** Oct-2014

**Hardware Availability:** Dec-2013

**Software Availability:** Sep-2013

## Base Portability Flags (Continued)

470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32  
-ansi-alias

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Lenovo Group Limited

IBM System x iDataPlex dx360 M4  
(Intel Xeon E5-2690 v2, 3.00 GHz)

**SPECfp2006 =**

**108**

**SPECfp\_base2006 =**

**104**

**CPU2006 license:** 9017

**Test date:** Oct-2014

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Dec-2013

**Tested by:** IBM Corporation

**Software Availability:** Sep-2013

## Peak Optimization Flags (Continued)

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll12 -ansi-alias  
-parallel

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll14 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll12  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll12  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll14

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Lenovo Group Limited

IBM System x iDataPlex dx360 M4  
(Intel Xeon E5-2690 v2, 3.00 GHz)

**SPECfp2006 =** 108

**SPECfp\_base2006 =** 104

**CPU2006 license:** 9017

**Test date:** Oct-2014

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Dec-2013

**Tested by:** IBM Corporation

**Software Availability:** Sep-2013

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-C.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-C.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Nov 5 10:23:08 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 4 November 2014.