



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6028TP-HTR  
(X10DRT-P , Intel Xeon E5-2690 v3)

**SPECint\_rate2006 = 1100**

**SPECint\_rate\_base2006 = 1060**

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

**Test date:** Oct-2014

**Hardware Availability:** Sep-2014

**Software Availability:** Sep-2014

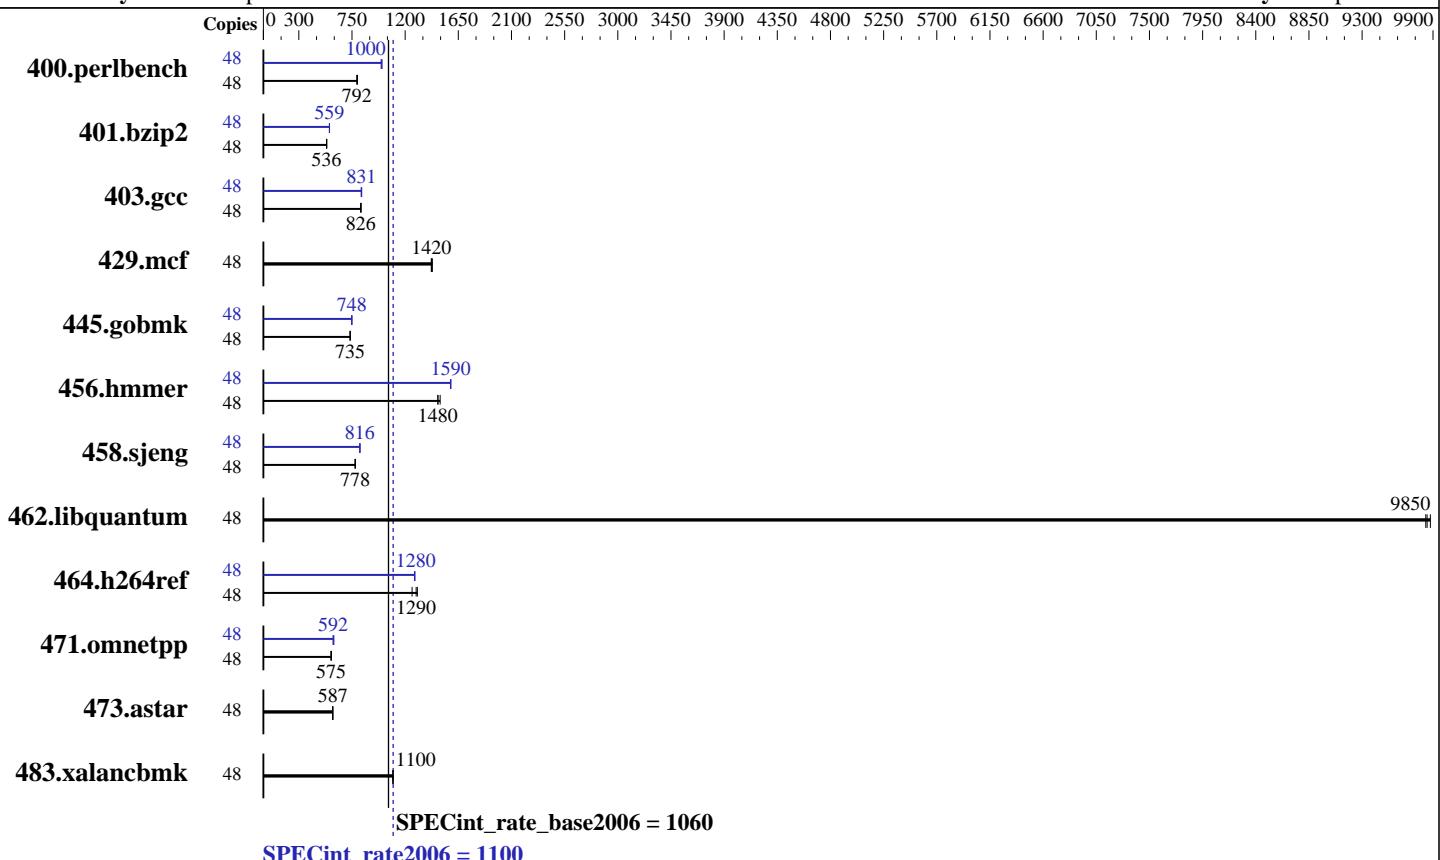

### Hardware

CPU Name: Intel Xeon E5-2690 v3  
CPU Characteristics: Intel Turbo Boost Technology up to 3.50 GHz  
CPU MHz: 2600  
FPU: Integrated  
CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip, 2 threads/core  
CPU(s) orderable: 1,2 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core  
L3 Cache: 30 MB I+D on chip per chip  
Other Cache: None  
Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)  
Disk Subsystem: 1 x 2000 GB SATA III, 7200 RPM  
Other Hardware: None

### Software

Operating System: CentOS Linux release 7.0,  
Kernel 3.10.0-123.8.1.el7.x86\_64  
Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE  
for Linux  
Auto Parallel: No  
File System: ext4  
System State: Run level 3 (multi-user)  
Base Pointers: 32-bit  
Peak Pointers: 32/64-bit  
Other Software: Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6028TP-HTR  
(X10DRT-P, Intel Xeon E5-2690 v3)

**SPECint\_rate2006 = 1100**

**SPECint\_rate\_base2006 = 1060**

CPU2006 license: 001176

Test date: Oct-2014

Test sponsor: Supermicro

Hardware Availability: Sep-2014

Tested by: Supermicro

Software Availability: Sep-2014

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	48	589	797	592	792	<b>592</b>	<b>792</b>	48	471	997	<b>468</b>	<b>1000</b>	467	1000
401.bzip2	48	<b>865</b>	<b>536</b>	863	537	867	534	48	<b>828</b>	<b>559</b>	829	559	827	560
403.gcc	48	<b>468</b>	<b>826</b>	467	827	470	823	48	467	828	<b>465</b>	<b>831</b>	464	832
429.mcf	48	306	1430	308	1420	<b>307</b>	<b>1420</b>	48	306	1430	308	1420	<b>307</b>	<b>1420</b>
445.gobmk	48	685	735	686	734	<b>685</b>	<b>735</b>	48	<b>673</b>	<b>748</b>	673	749	673	748
456.hammer	48	303	1480	<b>303</b>	<b>1480</b>	299	1500	48	283	1580	282	1590	<b>282</b>	<b>1590</b>
458.sjeng	48	<b>746</b>	<b>778</b>	746	779	749	776	48	<b>711</b>	<b>816</b>	712	816	710	818
462.libquantum	48	<b>101</b>	<b>9850</b>	101	9840	101	9880	48	<b>101</b>	<b>9850</b>	101	9840	101	9880
464.h264ref	48	844	1260	815	1300	<b>821</b>	<b>1290</b>	48	830	1280	<b>829</b>	<b>1280</b>	828	1280
471.omnetpp	48	<b>522</b>	<b>575</b>	525	571	521	576	48	503	597	508	590	<b>507</b>	<b>592</b>
473.astar	48	573	588	<b>574</b>	<b>587</b>	575	586	48	573	588	<b>574</b>	<b>587</b>	575	586
483.xalancbmk	48	302	1100	<b>302</b>	<b>1100</b>	302	1100	48	302	1100	<b>302</b>	<b>1100</b>	302	1100

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Settings:  
COD Enable = Enable  
Early Snoop = Disable  
Enforce POR = Disabled

## General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/home/Trial/SPEC2006_v11/libs/32:/home/Trial/SPEC2006_v11/libs/64:/home/Trial/SPEC2006_v11/sh"
```

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1> /proc/sys/vm/drop_caches
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6028TP-HTR  
(X10DRT-P , Intel Xeon E5-2690 v3)

**SPECint\_rate2006 = 1100**

**SPECint\_rate\_base2006 = 1060**

**CPU2006 license:** 001176

**Test sponsor:** Supermicro

**Tested by:** Supermicro

**Test date:** Oct-2014

**Hardware Availability:** Sep-2014

**Software Availability:** Sep-2014

## General Notes (Continued)

runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

    icc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

C++ benchmarks:

    icpc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

    -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
    -opt-mem-layout-trans=3

C++ benchmarks:

    -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
    -opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

    icc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

400.perlbench: icc -m64

401.bzip2: icc -m64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6028TP-HTR  
(X10DRT-P , Intel Xeon E5-2690 v3)

**SPECint\_rate2006 = 1100**

**SPECint\_rate\_base2006 = 1060**

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Oct-2014

Hardware Availability: Sep-2014

Software Availability: Sep-2014

## Peak Compiler Invocation (Continued)

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

401.bzip2: -DSPEC\_CPU\_LP64

456.hmmer: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll14 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll12 -ansi-alias

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6028TP-HTR  
(X10DRT-P , Intel Xeon E5-2690 v3)

**SPECint\_rate2006 = 1100**

**SPECint\_rate\_base2006 = 1060**

**CPU2006 license:** 001176

**Test sponsor:** Supermicro

**Tested by:** Supermicro

**Test date:** Oct-2014

**Hardware Availability:** Sep-2014

**Software Availability:** Sep-2014

## Peak Optimization Flags (Continued)

C++ benchmarks:

```
471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
             -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
             -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
             -L/sh -lsmartheap
```

```
473.astar: basepeak = yes
```

```
483.xalancbmk: basepeak = yes
```

## Peak Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revE.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Nov 5 10:24:15 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 4 November 2014.