SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Lenovo Group Limited

IBM System x iDataPlex dx360 M4
(Intel Xeon E5-2650L v2, 1.70 GHz)

SPECint®_rate2006 = 564

SPECint_rate_base2006 = 543

CPU2006 license: 9017
Test sponsor: Lenovo Group Limited
Tested by: IBM Corporation

Test date: Oct-2014
Hardware Availability: Dec-2013
Software Availability: Sep-2013

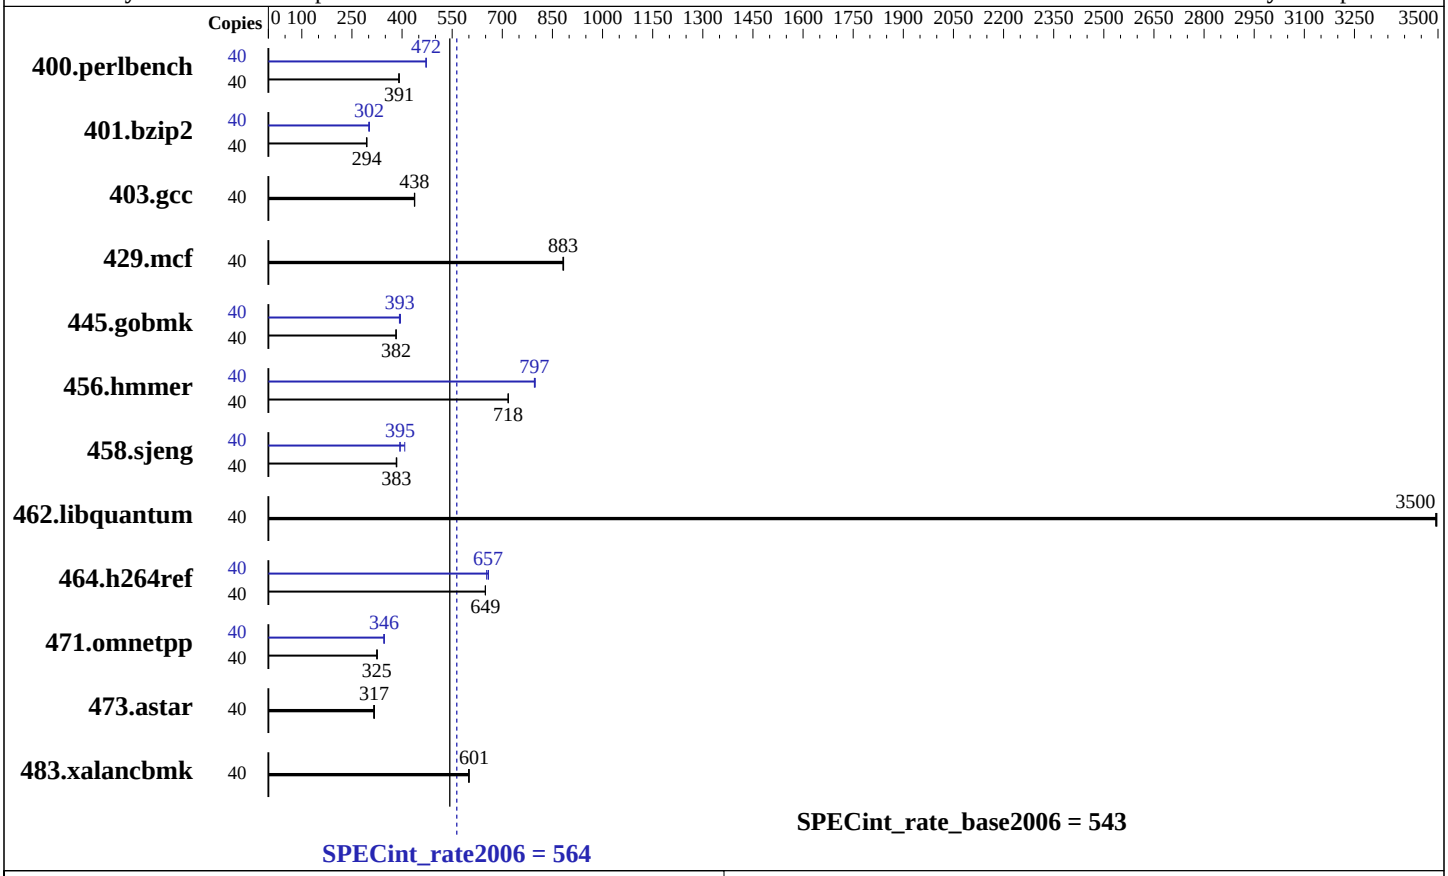

Hardware

CPU Name:	Intel Xeon E5-2650L v2
CPU Characteristics:	Intel Turbo Boost Technology up to 2.10 GHz
CPU MHz:	1700
FPU:	Integrated
CPU(s) enabled:	20 cores, 2 chips, 10 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	25 MB I+D on chip per chip
Other Cache:	None
Memory:	256 GB (16 x 16 GB 2Rx4 PC3-14900R-13, ECC, running at 1600 MHz)
Disk Subsystem:	1 x 500 GB SATA, 7200 RPM
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 6.4 (Santiago) 2.6.32-358.el6.x86_64
Compiler:	C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux
Auto Parallel:	No
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.0

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Lenovo Group Limited

IBM System x iDataPlex dx360 M4
(Intel Xeon E5-2650L v2, 1.70 GHz)

SPECint_rate2006 = 564

SPECint_rate_base2006 = 543

CPU2006 license: 9017
Test sponsor: Lenovo Group Limited
Tested by: IBM Corporation

Test date: Oct-2014
Hardware Availability: Dec-2013
Software Availability: Sep-2013

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	40	1001	390	998	392	**1000**	**391**	40	828	472	828	472	**828**	**472**
401.bzip2	40	**1311**	**294**	1315	294	1310	295	40	**1279**	**302**	1278	302	1284	301
403.gcc	40	735	438	**736**	**438**	737	437	40	735	438	**736**	**438**	737	437
429.mcf	40	413	883	**413**	**883**	414	881	40	413	883	**413**	**883**	414	881
445.gobmk	40	**1097**	**382**	1097	382	1099	382	40	1062	395	**1066**	**393**	1070	392
456.hmmer	40	520	718	**520**	**718**	520	718	40	467	799	469	796	**468**	**797**
458.sjeng	40	**1264**	**383**	1259	384	1264	383	40	1231	393	**1226**	**395**	1186	408
462.libquantum	40	237	3500	**237**	**3500**	237	3490	40	237	3500	**237**	**3500**	237	3490
464.h264ref	40	1364	649	1363	650	**1363**	**649**	40	1344	659	1355	653	**1346**	**657**
471.omnetpp	40	**770**	**325**	767	326	771	324	40	**722**	**346**	720	347	723	346
473.astar	40	**887**	**317**	891	315	884	318	40	**887**	**317**	891	315	884	318
483.xalancbmk	40	459	601	461	599	**460**	**601**	40	459	601	461	599	**460**	**601**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Zone reclaim mode enabled with:
echo 1 > /proc/sys/vm/zone_reclaim_mode
Intel Idle Driver disabled with the following Linux kernel parameter in /etc/grub.conf:
intel_idle.max_cstate=0
```

Platform Notes

```
BIOS setting:
Operating Mode set to Maximum Performance
Sysinfo program /home/SPECcpu-20140116-ic14.0/config/sysinfo.rev6874
$Rev: 6874 $ $Date:: 2013-11-20 #$ 654bd3fcf53b06faef0efe54ed011998
running on dx360M4 Fri Oct 24 16:59:22 2014

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E5-2650L v2 @ 1.70GHz
      2 "physical id"s (chips)
```

Continued on next page

Platform Notes (Continued)

```
      40 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 10
      siblings  : 20
      physical 0: cores 0 1 2 3 4 8 9 10 11 12
      physical 1: cores 0 1 2 3 4 8 9 10 11 12
   cache size : 25600 KB

From /proc/meminfo
   MemTotal:       264640496 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

/usr/bin/lsb_release -d
   Red Hat Enterprise Linux Server release 6.4 (Santiago)

From /etc/*release* /etc/*version*
   redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
   system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
   system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
   Linux dx360M4 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41 EST 2013
   x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Oct 24 16:26

SPEC is set to: /home/SPECcpu-20140116-ic14.0
   Filesystem     Type    Size  Used Avail Use% Mounted on
   /dev/mapper/vg_td2-lv_home
                  ext4    380G  174G  187G  49% /home
Additional information from dmidecode:

   Warning: Use caution when you interpret this section. The 'dmidecode' program
   reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to
   hardware, firmware, and the "DMTF SMBIOS" standard.

  BIOS IBM -[TDE139OUS-1.50]- 02/21/2014
  Memory:
   16x Samsung M393B2G70QH0-CMA 16 GB 2 rank 1866 MHz, configured at 1600 MHz

(End of data from sysinfo program)
```

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/SPECcpu-20140116-ic14.0/libs/32:/home/SPECcpu-20140116-ic14.0/libs/64:/home/SPECcpu-20140116-ic14.0/sh"

Continued on next page

General Notes (Continued)

```
Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
memory using RedHat EL 6.4
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1>       /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:
```
icc  -m32
```

C++ benchmarks:
```
icpc -m32
```

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
```

C++ benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
-Wl,-z,muldefs -L/sh -lsmartheap
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
```
icc  -m32
```

Continued on next page

Peak Compiler Invocation (Continued)

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:
icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: basepeak = yes

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4 -auto-ilp32

Continued on next page

Peak Optimization Flags (Continued)

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html
http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-C.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml
http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-C.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Nov 18 16:32:47 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 18 November 2014.