



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M4 (Intel Xeon E5-2683 v3 @ 2.00GHz)

**SPECint\_rate2006 = 1110**

**SPECint\_rate\_base2006 = 1070**

**CPU2006 license:** 9019


**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test date:** Nov-2014

**Hardware Availability:** Sep-2014

**Software Availability:** Sep-2013

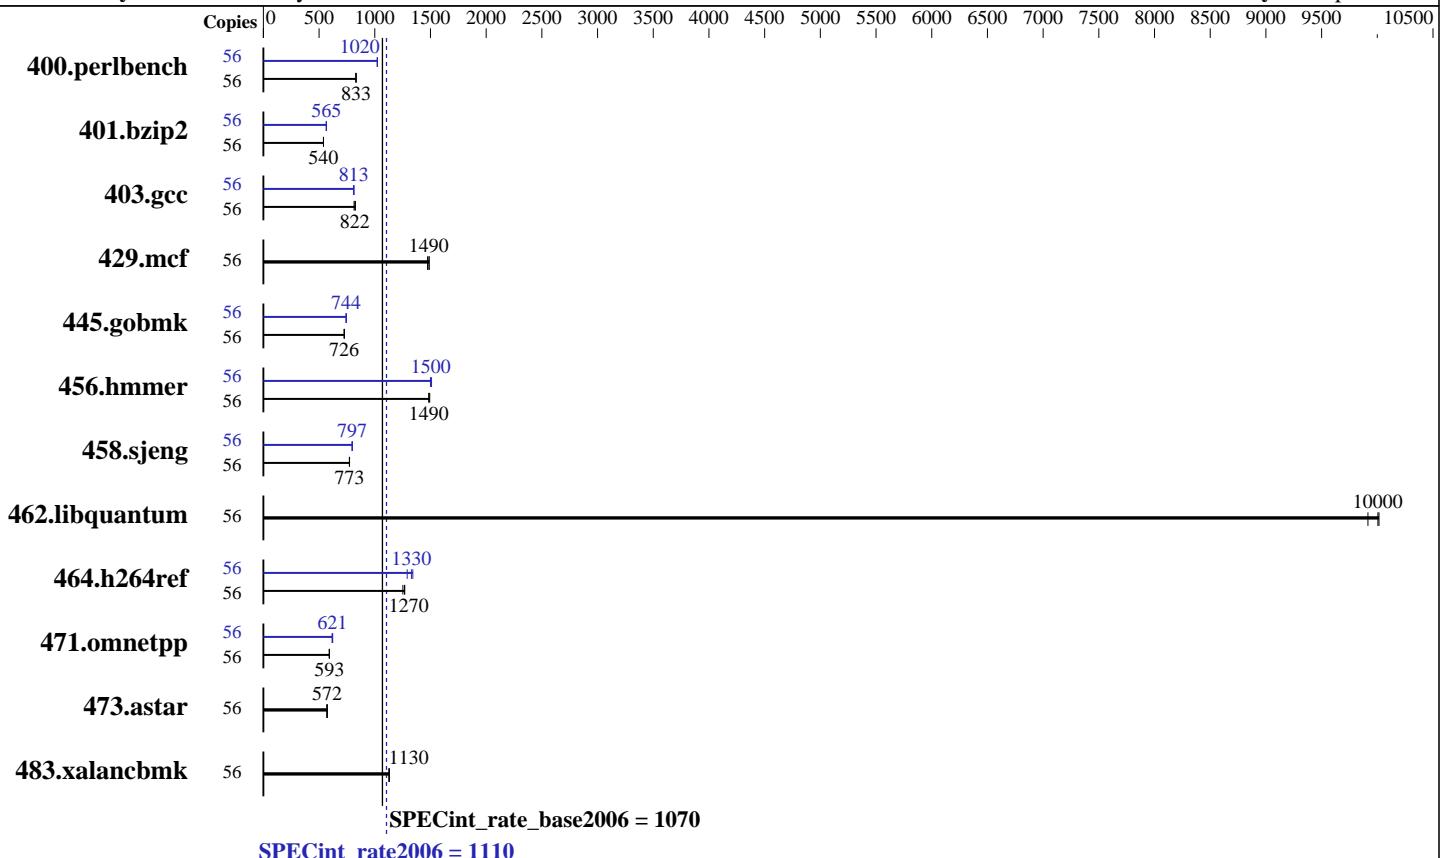

### Hardware

CPU Name: Intel Xeon E5-2683 v3  
CPU Characteristics: Intel Turbo Boost Technology up to 3.00 GHz  
CPU MHz: 2000  
FPU: Integrated  
CPU(s) enabled: 28 cores, 2 chips, 14 cores/chip, 2 threads/core  
CPU(s) orderable: 1,2 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core  
L3 Cache: 35 MB I+D on chip per chip  
Other Cache: None  
Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)  
Disk Subsystem: 1 x 300GB SAS, 15K RPM  
Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)  
Compiler: 2.6.32-431.el6.x86\_64  
C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux  
Auto Parallel: No  
File System: ext4  
System State: Run level 3 (multi-user)  
Base Pointers: 32-bit  
Peak Pointers: 32/64-bit  
Other Software: Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M4 (Intel Xeon E5-2683 v3 @ 2.00GHz)

**SPECint\_rate2006 = 1110**

**SPECint\_rate\_base2006 = 1070**

**CPU2006 license:** 9019

**Test date:** Nov-2014

**Test sponsor:** Cisco Systems

**Hardware Availability:** Sep-2014

**Tested by:** Cisco Systems

**Software Availability:** Sep-2013

## Results Table

| Benchmark      | Base   |            |              |            |             |             |             | Peak   |            |              |            |             |            |             |
|----------------|--------|------------|--------------|------------|-------------|-------------|-------------|--------|------------|--------------|------------|-------------|------------|-------------|
|                | Copies | Seconds    | Ratio        | Seconds    | Ratio       | Seconds     | Ratio       | Copies | Seconds    | Ratio        | Seconds    | Ratio       | Seconds    | Ratio       |
| 400.perlbench  | 56     | 657        | 833          | 660        | 829         | <b>657</b>  | <b>833</b>  | 56     | 535        | 1020         | <b>535</b> | <b>1020</b> | 534        | 1020        |
| 401.bzip2      | 56     | 1001       | 540          | 1002       | 539         | <b>1001</b> | <b>540</b>  | 56     | 954        | 566          | 958        | 564         | <b>956</b> | <b>565</b>  |
| 403.gcc        | 56     | 554        | 814          | <b>548</b> | <b>822</b>  | 546         | 826         | 56     | 555        | 813          | 557        | 809         | <b>555</b> | <b>813</b>  |
| 429.mcf        | 56     | 343        | 1490         | 347        | 1470        | <b>344</b>  | <b>1490</b> | 56     | 343        | 1490         | 347        | 1470        | <b>344</b> | <b>1490</b> |
| 445.gobmk      | 56     | <b>809</b> | <b>726</b>   | 809        | 726         | 809         | 726         | 56     | <b>790</b> | <b>744</b>   | 790        | 743         | 790        | 744         |
| 456.hammer     | 56     | 352        | 1490         | 350        | 1490        | <b>352</b>  | <b>1490</b> | 56     | 346        | 1510         | 348        | 1500        | <b>347</b> | <b>1500</b> |
| 458.sjeng      | 56     | 876        | 774          | <b>877</b> | <b>773</b>  | 877         | 772         | 56     | 849        | 798          | 850        | 797         | <b>850</b> | <b>797</b>  |
| 462.libquantum | 56     | <b>116</b> | <b>10000</b> | 116        | 10000       | 117         | 9920        | 56     | <b>116</b> | <b>10000</b> | 116        | 10000       | 117        | 9920        |
| 464.h264ref    | 56     | 990        | 1250         | <b>979</b> | <b>1270</b> | 976         | 1270        | 56     | <b>932</b> | <b>1330</b>  | 924        | 1340        | 960        | 1290        |
| 471.omnetpp    | 56     | 590        | 593          | 592        | 591         | <b>591</b>  | <b>593</b>  | 56     | 568        | 616          | 562        | 622         | <b>564</b> | <b>621</b>  |
| 473.astar      | 56     | 685        | 574          | 690        | 570         | <b>687</b>  | <b>572</b>  | 56     | 685        | 574          | 690        | 570         | <b>687</b> | <b>572</b>  |
| 483.xalancbmk  | 56     | <b>342</b> | <b>1130</b>  | 342        | 1130        | 343         | 1130        | 56     | <b>342</b> | <b>1130</b>  | 342        | 1130        | 343        | 1130        |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

CPU performance set to HPC  
Power Technology set to Custom  
Processor Power State C6 set to Disabled  
Energy Performance BIAS setting set to Performance  
Memory RAS configuration set to Maximum Performance  
Sysinfo program /opt/cpu2006-1.2/config/sysinfo.rev6818  
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191  
running on rhel65 Mon Nov 3 10:13:06 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) CPU E5-2683 v3 @ 2.00GHz  
2 "physical id"s (chips)  
56 "processors"

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M4 (Intel Xeon E5-2683 v3 @ 2.00GHz)

**SPECint\_rate2006 = 1110**

**SPECint\_rate\_base2006 = 1070**

**CPU2006 license:** 9019

**Test date:** Nov-2014

**Test sponsor:** Cisco Systems

**Hardware Availability:** Sep-2014

**Tested by:** Cisco Systems

**Software Availability:** Sep-2013

## Platform Notes (Continued)

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 14
siblings   : 28
physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
cache size : 17920 KB
```

```
From /proc/meminfo
MemTotal:      264255336 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.5 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux rhel65 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST 2013 x86_64
x86_64 x86_64 GNU/Linux
```

```
run-level 3 Nov 3 10:10
```

```
SPEC is set to: /opt/cpu2006-1.2
Filesystem      Type  Size  Used  Avail Use% Mounted on
/dev/sdb1        ext4  245G   19G  215G   8%  /
```

Additional information from dmidecode:

```
BIOS Cisco Systems, Inc. C240M4.2.0.3c.0.091920142008 09/19/2014
```

Memory:

```
16x 0xCE00 M393A2G40DB0-CPB 16 GB 2133 MHz 2 rank
8x NO DIMM NO DIMM
```

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/opt/cpu2006-1.2/libs/32:/opt/cpu2006-1.2/libs/64:/opt/cpu2006-1.2/sh"
```

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1> /proc/sys/vm/drop_caches
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M4 (Intel Xeon E5-2683 v3 @ 2.00GHz)

**SPECint\_rate2006 = 1110**

**SPECint\_rate\_base2006 = 1070**

**CPU2006 license:** 9019

**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test date:** Nov-2014

**Hardware Availability:** Sep-2014

**Software Availability:** Sep-2013

## General Notes (Continued)

runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

    icc -m32

C++ benchmarks:

    icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

    -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
    -opt-mem-layout-trans=3

C++ benchmarks:

    -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
    -opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

    icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M4 (Intel Xeon E5-2683 v3 @ 2.00GHz)

**SPECint\_rate2006 = 1110**

**SPECint\_rate\_base2006 = 1070**

**CPU2006 license:** 9019

**Test date:** Nov-2014

**Test sponsor:** Cisco Systems

**Hardware Availability:** Sep-2014

**Tested by:** Cisco Systems

**Software Availability:** Sep-2013

## Peak Compiler Invocation (Continued)

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:

`icpc -m32`

## Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`

401.bzip2: `-DSPEC_CPU_LP64`

456.hmmer: `-DSPEC_CPU_LP64`

458.sjeng: `-DSPEC_CPU_LP64`

462.libquantum: `-DSPEC_CPU_LINUX`

483.xalancbmk: `-DSPEC_CPU_LINUX`

## Peak Optimization Flags

C benchmarks:

400.perlbench: `-xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`  
`-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)`  
`-auto-ilp32`

401.bzip2: `-xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`  
`-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)`  
`-opt-prefetch -auto-ilp32 -ansi-alias`

403.gcc: `-xCORE-AVX2 -ipo -O3 -no-prec-div`

429.mcf: `basepeak = yes`

445.gobmk: `-xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)`  
`-ansi-alias -opt-mem-layout-trans=3`

456.hmmer: `-xCORE-AVX2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32`

458.sjeng: `-xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`  
`-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)`  
`-unroll14 -auto-ilp32`

462.libquantum: `basepeak = yes`

464.h264ref: `-xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`  
`-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)`  
`-unroll12 -ansi-alias`

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M4 (Intel Xeon E5-2683 v3 @ 2.00GHz)

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

**SPECint\_rate2006 = 1110**

**SPECint\_rate\_base2006 = 1070**

Test date: Nov-2014

Hardware Availability: Sep-2014

Software Availability: Sep-2013

## Peak Optimization Flags (Continued)

C++ benchmarks:

```
471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
             -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
             -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
             -L/sh -lsmartheap
```

```
473.astar: basepeak = yes
```

```
483.xalancbmk: basepeak = yes
```

## Peak Other Flags

C benchmarks:

```
403.gcc: -Dalloca=__alloca
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>  
<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>  
<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revC.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Nov 18 16:34:14 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 18 November 2014.