SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL380 Gen9
(2.40 GHz, Intel Xeon E5-2620 v3)

SPECint®_rate2006 = 525

SPECint_rate_base2006 = 503

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Oct-2014
Hardware Availability: Sep-2014
Software Availability: Sep-2014

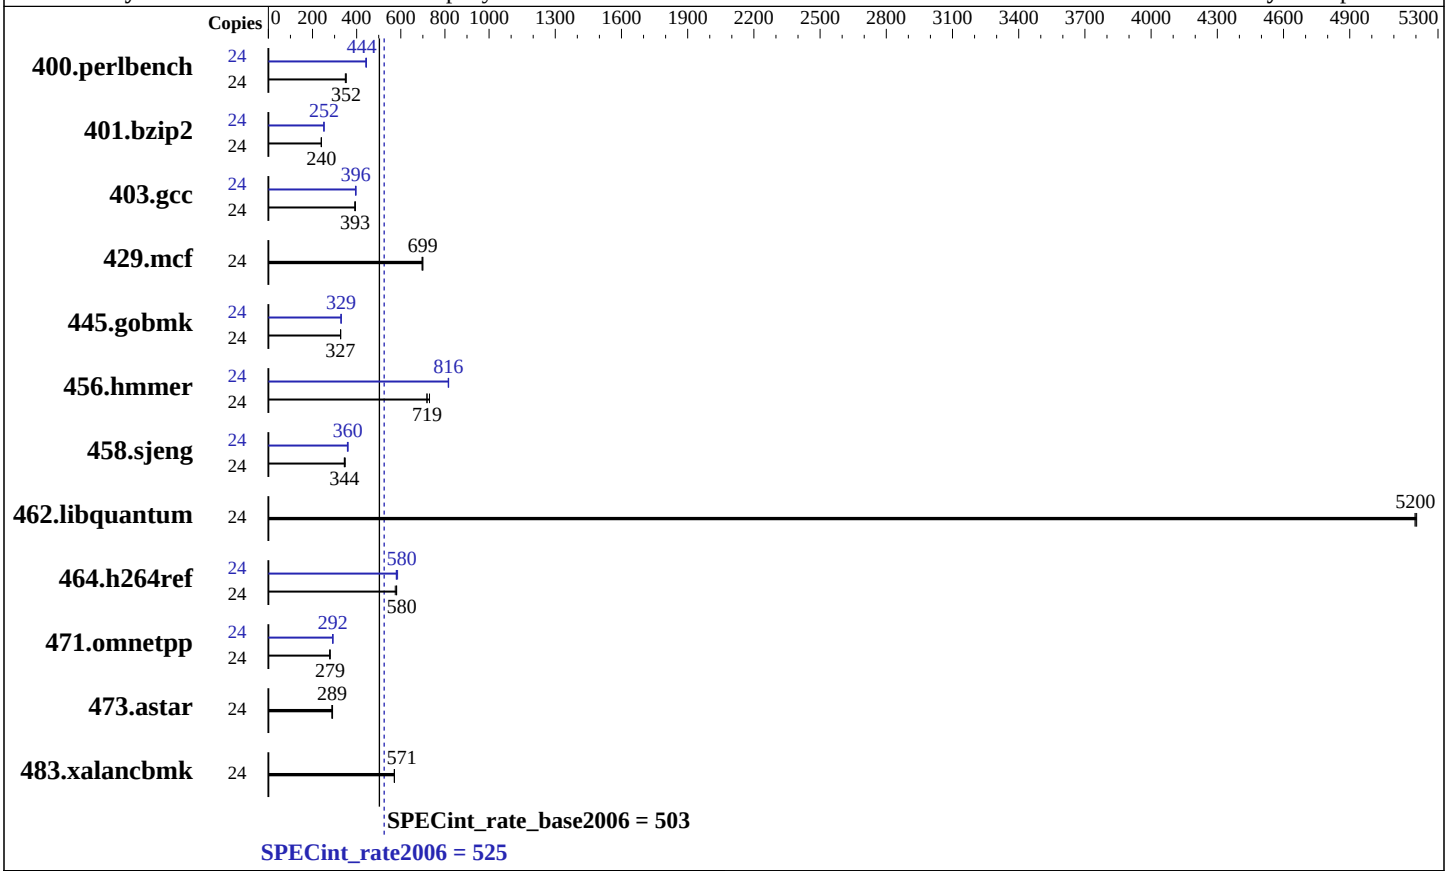

Hardware

CPU Name:	Intel Xeon E5-2620 v3
CPU Characteristics:	Intel Turbo Boost Technology up to 3.20 GHz
CPU MHz:	2400
FPU:	Integrated
CPU(s) enabled:	12 cores, 2 chips, 6 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	15 MB I+D on chip per chip
Other Cache:	None
Memory:	256 GB (16 x 16 GB 2Rx4 PC4-2133P-R, running at 1866 MHz)
Disk Subsystem:	1 x 400 GB SAS SSD, RAID 0
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 7.0 (Maipo) Kernel 3.10.0-123.el7.x86_64
Compiler:	C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux
Auto Parallel:	No
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.0

SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL380 Gen9
(2.40 GHz, Intel Xeon E5-2620 v3)

SPECint_rate2006 = 525

SPECint_rate_base2006 = 503

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Oct-2014
Hardware Availability: Sep-2014
Software Availability: Sep-2014

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	672	349	**666**	**352**	666	352	24	**528**	**444**	528	444	531	441
401.bzip2	24	964	240	**964**	**240**	967	240	24	922	251	**919**	**252**	919	252
403.gcc	24	493	392	490	394	**492**	**393**	24	486	397	490	395	**488**	**396**
429.mcf	24	313	700	**313**	**699**	314	696	24	313	700	**313**	**699**	314	696
445.gobmk	24	**769**	**327**	768	328	770	327	24	**764**	**329**	765	329	762	330
456.hmmer	24	**311**	**719**	312	718	307	730	24	**274**	**816**	274	817	275	815
458.sjeng	24	843	344	**843**	**344**	834	348	24	811	358	**807**	**360**	805	361
462.libquantum	24	95.7	5200	95.6	5200	**95.6**	**5200**	24	95.7	5200	95.6	5200	**95.6**	**5200**
464.h264ref	24	**915**	**580**	924	575	914	581	24	**915**	**580**	907	585	916	580
471.omnetpp	24	**537**	**279**	536	280	540	278	24	512	293	**515**	**292**	515	291
473.astar	24	579	291	**583**	**289**	585	288	24	579	291	**583**	**289**	585	288
483.xalancbmk	24	290	571	290	571	**290**	**571**	24	290	571	290	571	**290**	**571**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS Configuration:
 HP Power Profile set to Custom
 HP Power Regulator to HP Static High Performance Mode
 Minimum Processor Idle Power Core State set to C6 State
 Minimum Processor Idle Power Package State set to No Package State
 QPI Snoop Configuration set to Cluster on Die
 Thermal Configuration set to Maximum Cooling
 Collaborative Power Control set to Disabled
 Processor Power and Utilization Monitoring set to Disabled
 Memory Double Refresh Rate set to 1x Refresh
 Memory Patrol Scrubbing set to Disabled
Sysinfo program /home/cpu2006/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
running on localhost.localdomain Fri Oct 24 13:03:13 2014

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
```

Continued on next page

Platform Notes (Continued)

```
      http://www.spec.org/cpu2006/Docs/config.html#sysinfo

    From /proc/cpuinfo
       model name : Intel(R) Xeon(R) CPU E5-2620 v3 @ 2.40GHz
          2 "physical id"s (chips)
          24 "processors"
       cores, siblings (Caution: counting these is hw and system dependent.  The
       following excerpts from /proc/cpuinfo might not be reliable.  Use with
       caution.)
          cpu cores : 6
          siblings  : 12
          physical 0: cores 0 1 2 3 4 5
          physical 1: cores 0 1 2 3 4 5
       cache size : 15360 KB

    From /proc/meminfo
       MemTotal:       263845936 kB
       HugePages_Total:       0
       Hugepagesize:       2048 kB

    From /etc/*release* /etc/*version*
       os-release:
          NAME="Red Hat Enterprise Linux Server"
          VERSION="7.0 (Maipo)"
          ID="rhel"
          ID_LIKE="fedora"
          VERSION_ID="7.0"
          PRETTY_NAME="Red Hat Enterprise Linux Server 7.0 (Maipo)"
          ANSI_COLOR="0;31"
          CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
       redhat-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
       system-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
       system-release-cpe: cpe:/o:redhat:enterprise_linux:7.0:ga:server

    uname -a:
       Linux localhost.localdomain 3.10.0-123.el7.x86_64 #1 SMP Mon May 5 11:16:57
       EDT 2014 x86_64 x86_64 x86_64 GNU/Linux

    run-level 3 Oct 24 13:00

    SPEC is set to: /home/cpu2006
       Filesystem     Type  Size  Used Avail Use% Mounted on
       /dev/sda3      ext4  364G  232G  114G  67% /
    Additional information from dmidecode:

       Warning: Use caution when you interpret this section. The 'dmidecode' program
       reads system data which is "intended to allow hardware to be accurately
       determined", but the intent may not be met, as there are frequent changes to
       hardware, firmware, and the "DMTF SMBIOS" standard.

      BIOS HP P89 08/26/2014
      Memory:
```

Continued on next page

Platform Notes (Continued)

```
    16x HP NOT AVAILABLE 16 GB 2 rank 2133 MHz, configured at 1866 MHz
    8x UNKNOWN NOT AVAILABLE

  (End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

 Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB
 memory using RedHat EL 7.0
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/transparent_hugepage/enabled
 Filesystem page cache cleared with:
 echo 1>       /proc/sys/vm/drop_caches
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:

```
icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32
```

C++ benchmarks:

```
icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32
```

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32`

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:
`icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`
401.bzip2: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
458.sjeng: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-xCORE-AVX2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2)
`-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2)
`-auto-ilp32`

401.bzip2: `-xCORE-AVX2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2)
`-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2)
`-opt-prefetch -auto-ilp32 -ansi-alias`

403.gcc: `-xCORE-AVX2 -ipo -O3 -no-prec-div`

Continued on next page

Peak Optimization Flags (Continued)

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-revD.html
http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-revD.xml
http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Feb 11 15:26:51 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 18 November 2014.