



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 1028R-TDW  
(X10DDW-i , Intel Xeon E5-2680 v3)

**SPECint\_rate2006 = 1050**

**SPECint\_rate\_base2006 = 1020**

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

**Test date:** Oct-2014

**Hardware Availability:** Sep-2014

**Software Availability:** Oct-2014

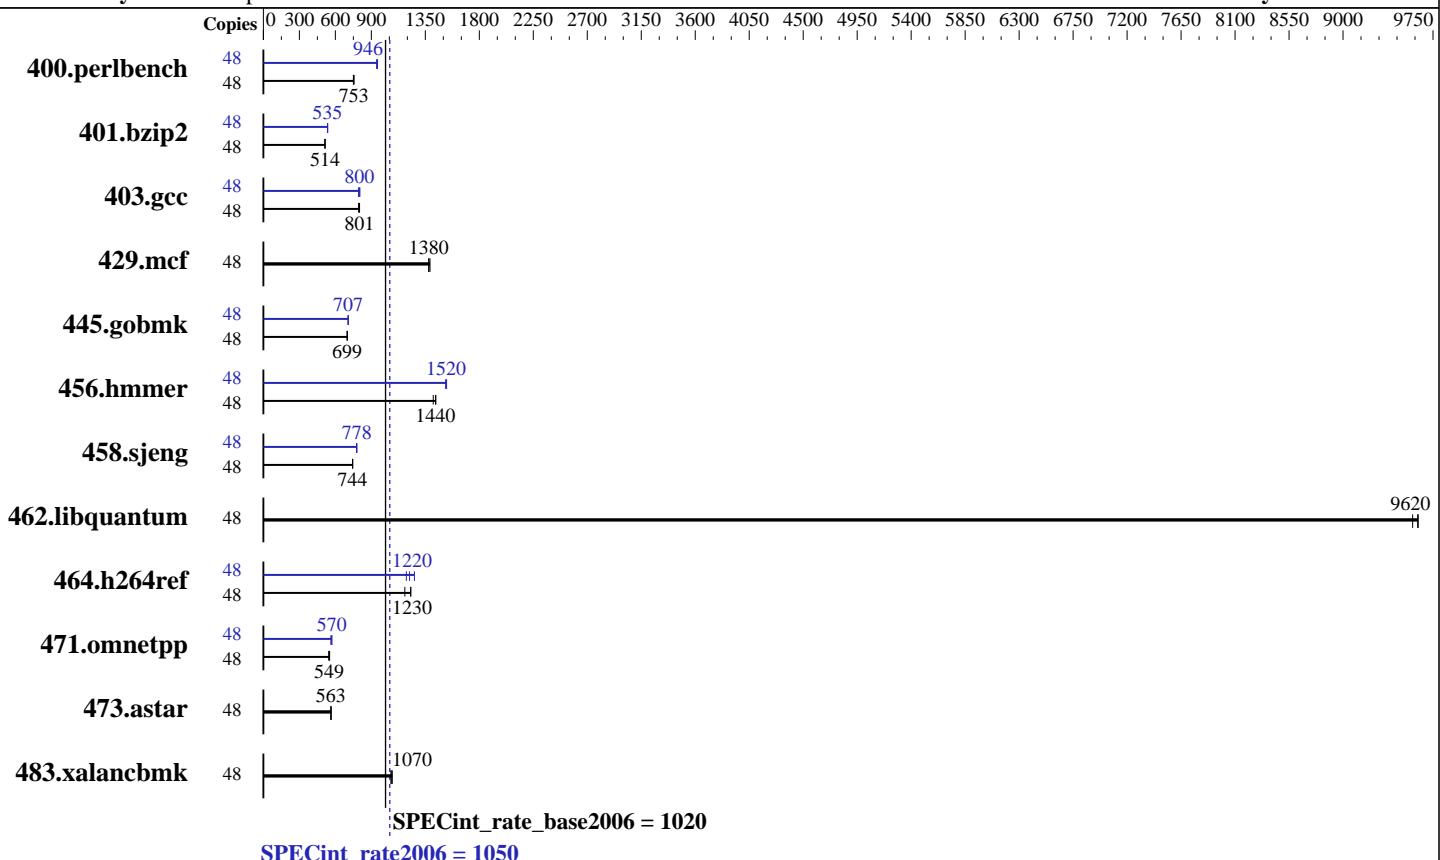

### Hardware

CPU Name:	Intel Xeon E5-2680 v3
CPU Characteristics:	Intel Turbo Boost Technology up to 3.30 GHz
CPU MHz:	2500
FPU:	Integrated
CPU(s) enabled:	24 cores, 2 chips, 12 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	30 MB I+D on chip per chip
Other Cache:	None
Memory:	128 GB (8 x 16 GB 2Rx4 PC4-2133P-R)
Disk Subsystem:	1 x 400 GB SATA III, SSD
Other Hardware:	None

### Software

Operating System:	Red Hat Enterprise Linux Server release 7.0, Kernel 3.10.0-123.el7.x86_64
Compiler:	C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux
Auto Parallel:	No
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 1028R-TDW  
(X10DDW-i , Intel Xeon E5-2680 v3)

**SPECint\_rate2006 = 1050**

**SPECint\_rate\_base2006 = 1020**

CPU2006 license: 001176

Test date: Oct-2014

Test sponsor: Supermicro

Hardware Availability: Sep-2014

Tested by: Supermicro

Software Availability: Oct-2014

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	48	625	750	621	755	<b>622</b>	<b>753</b>	48	496	945	493	952	<b>496</b>	<b>946</b>
401.bzip2	48	901	514	902	513	<b>902</b>	<b>514</b>	48	<b>865</b>	<b>535</b>	864	536	867	534
403.gcc	48	487	793	<b>483</b>	<b>801</b>	482	802	48	488	793	<b>483</b>	<b>800</b>	480	805
429.mcf	48	<b>317</b>	<b>1380</b>	318	1380	315	1390	48	<b>317</b>	<b>1380</b>	318	1380	315	1390
445.gobmk	48	720	700	721	699	<b>720</b>	<b>699</b>	48	<b>712</b>	<b>707</b>	712	707	712	707
456.hammer	48	312	1440	316	1420	<b>312</b>	<b>1440</b>	48	295	1520	293	1530	<b>294</b>	<b>1520</b>
458.sjeng	48	<b>781</b>	<b>744</b>	782	743	780	745	48	748	777	<b>747</b>	<b>778</b>	746	779
462.libquantum	48	<b>103</b>	<b>9620</b>	104	9580	103	9630	48	<b>103</b>	<b>9620</b>	104	9580	103	9630
464.h264ref	48	901	1180	864	1230	<b>865</b>	<b>1230</b>	48	844	1260	<b>872</b>	<b>1220</b>	891	1190
471.omnetpp	48	<b>546</b>	<b>549</b>	551	545	543	552	48	526	571	534	562	<b>526</b>	<b>570</b>
473.astar	48	<b>598</b>	<b>563</b>	597	564	598	563	48	<b>598</b>	<b>563</b>	597	564	598	563
483.xalancbmk	48	308	1070	311	1060	<b>311</b>	<b>1070</b>	48	308	1070	311	1060	<b>311</b>	<b>1070</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Settings:  
Execute Disable Bit = Disable  
Intel Virtualization Technology = Disable  
COP Enable = Enable  
Early Snoop = Disable

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

Filesystem page cache cleared with:

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 1028R-TDW  
(X10DDW-i , Intel Xeon E5-2680 v3)

**SPECint\_rate2006 = 1050**

**SPECint\_rate\_base2006 = 1020**

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Oct-2014

Hardware Availability: Sep-2014

Software Availability: Oct-2014

## General Notes (Continued)

```
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```

## Base Compiler Invocation

C benchmarks:

```
icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32
```

C++ benchmarks:

```
icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32
```

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap
```

## Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32
```

400.perlbench: icc -m64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 1028R-TDW  
(X10DDW-i , Intel Xeon E5-2680 v3)

**SPECint\_rate2006 = 1050**

**SPECint\_rate\_base2006 = 1020**

**CPU2006 license:** 001176

**Test sponsor:** Supermicro

**Tested by:** Supermicro

**Test date:** Oct-2014

**Hardware Availability:** Sep-2014

**Software Availability:** Oct-2014

## Peak Compiler Invocation (Continued)

401.bzip2: icc -m64

456.hmmr: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

401.bzip2: -DSPEC\_CPU\_LP64

456.hmmr: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -opt-mem-layout-trans=3

456.hmmr: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll4 -auto-ilp32

462.libquantum: basepeak = yes

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SuperServer 1028R-TDW  
(X10DDW-i , Intel Xeon E5-2680 v3)

**SPECint\_rate2006 = 1050**

**SPECint\_rate\_base2006 = 1020**

**CPU2006 license:** 001176

**Test sponsor:** Supermicro

**Tested by:** Supermicro

**Test date:** Oct-2014

**Hardware Availability:** Sep-2014

**Software Availability:** Oct-2014

## Peak Optimization Flags (Continued)

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll12 -ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>  
<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revG.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>  
<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revG.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Dec 3 10:34:19 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 2 December 2014.