



SPEC® CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp®2006 = 109

Express5800/R120f-1M (Intel Xeon E5-2670 v3)

SPECfp_base2006 = 104

CPU2006 license: 9006


Test date: Oct-2014

Test sponsor: NEC Corporation

Hardware Availability: Feb-2015

Tested by: NEC Corporation

Software Availability: Jul-2014

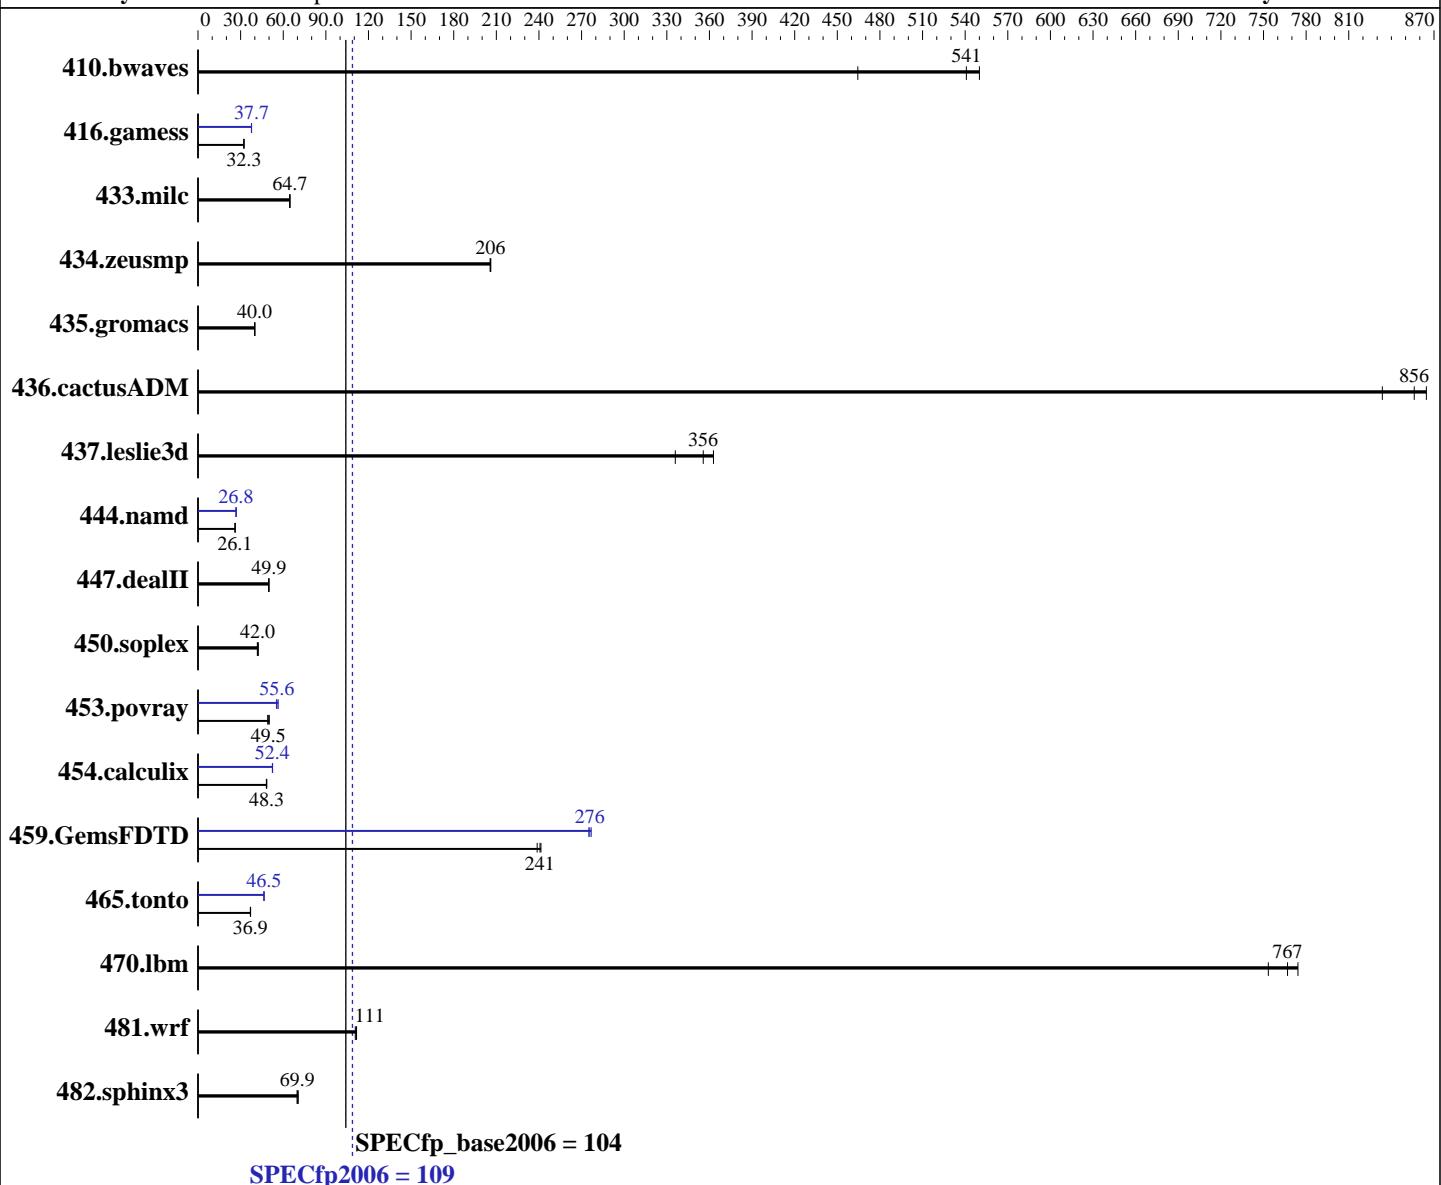

Hardware

CPU Name: Intel Xeon E5-2670 v3
 CPU Characteristics: Intel Turbo Boost Technology up to 3.10 GHz
 CPU MHz: 2300
 FPU: Integrated
 CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)
 Compiler: Kernel 2.6.32-431.17.1.el6.x86_64
 C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux;
 Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux
 Auto Parallel: Yes
 File System: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R120f-1M (Intel Xeon E5-2670 v3)

SPECfp2006 = 109

CPU2006 license: 9006

Test date: Oct-2014

Test sponsor: NEC Corporation

Hardware Availability: Feb-2015

Tested by: NEC Corporation

Software Availability: Jul-2014

L3 Cache: 30 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)
 Disk Subsystem: 1 x 250 GB SATA, 7200 RPM
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	29.3	464	24.7	550	<u>25.1</u>	<u>541</u>	29.3	464	24.7	550	<u>25.1</u>	<u>541</u>
416.gamess	<u>606</u>	<u>32.3</u>	604	32.4	607	32.3	<u>520</u>	<u>37.7</u>	519	37.7	521	37.6
433.milc	142	64.7	142	64.5	<u>142</u>	<u>64.7</u>	142	64.7	142	64.5	<u>142</u>	<u>64.7</u>
434.zeusmp	<u>44.2</u>	<u>206</u>	44.3	206	44.2	206	<u>44.2</u>	<u>206</u>	44.3	206	44.2	206
435.gromacs	179	39.9	<u>179</u>	<u>40.0</u>	179	40.0	179	39.9	<u>179</u>	<u>40.0</u>	179	40.0
436.cactusADM	14.3	834	13.8	865	<u>14.0</u>	<u>856</u>	14.3	834	13.8	865	<u>14.0</u>	<u>856</u>
437.leslie3d	<u>26.4</u>	<u>356</u>	25.9	363	28.0	336	<u>26.4</u>	<u>356</u>	25.9	363	28.0	336
444.namd	307	26.1	307	26.1	<u>307</u>	<u>26.1</u>	<u>299</u>	<u>26.8</u>	299	26.8	299	26.8
447.dealII	230	49.7	229	50.0	<u>229</u>	<u>49.9</u>	230	49.7	229	50.0	<u>229</u>	<u>49.9</u>
450.soplex	<u>198</u>	<u>42.0</u>	200	41.8	196	42.5	<u>198</u>	<u>42.0</u>	200	41.8	196	42.5
453.povray	108	49.1	<u>107</u>	<u>49.5</u>	106	50.2	<u>95.6</u>	<u>55.6</u>	94.2	56.5	96.3	55.2
454.calculix	171	48.3	<u>171</u>	<u>48.3</u>	171	48.1	<u>157</u>	<u>52.4</u>	157	52.5	158	52.4
459.GemsFDTD	44.0	241	44.4	239	<u>44.1</u>	<u>241</u>	38.3	277	<u>38.5</u>	<u>276</u>	38.6	275
465.tonto	267	36.9	<u>266</u>	<u>36.9</u>	266	37.0	212	46.5	212	46.4	<u>212</u>	<u>46.5</u>
470.lbm	18.2	753	17.7	774	<u>17.9</u>	<u>767</u>	18.2	753	17.7	774	<u>17.9</u>	<u>767</u>
481.wrf	100	112	<u>100</u>	<u>111</u>	101	111	100	112	<u>100</u>	<u>111</u>	101	111
482.sphinx3	279	69.8	276	70.6	<u>279</u>	<u>69.9</u>	<u>279</u>	<u>69.8</u>	276	70.6	<u>279</u>	<u>69.9</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Settings:

Power Management Policy: Custom
 Energy Performance: Performance
 Patrol Scrub: Disabled
 Demand Scrub: Disabled
 Early Snoop: Disabled
 Hyper-Threading: Disabled



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R120f-1M (Intel Xeon E5-2670 v3)

SPECfp2006 =

109

SPECfp_base2006 =

104

CPU2006 license: 9006

Test date: Oct-2014

Test sponsor: NEC Corporation

Hardware Availability: Feb-2015

Tested by: NEC Corporation

Software Availability: Jul-2014

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact"

LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

OMP_NUM_THREADS = "24"

The Express5800/R120f-1M (Intel Xeon E5-2670 v3) and
the Express5800/R120f-2M (Intel Xeon E5-2670 v3) models are electronically equivalent.
The results have been measured on the Express5800/R120f-2M (Intel Xeon E5-2670 v3) model.

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R120f-1M (Intel Xeon E5-2670 v3)

SPECfp2006 = 109

CPU2006 license: 9006

Test date: Oct-2014

Test sponsor: NEC Corporation

Hardware Availability: Feb-2015

Tested by: NEC Corporation

Software Availability: Jul-2014

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch  
-ansi-alias
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch  
-ansi-alias
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
433.milc: basepeak = yes
```

```
470.lbm: basepeak = yes
```

```
482.sphinx3: basepeak = yes
```

C++ benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R120f-1M (Intel Xeon E5-2670 v3)

SPECfp2006 =

109

SPECfp_base2006 =

104

CPU2006 license: 9006

Test date:

Oct-2014

Test sponsor: NEC Corporation

Hardware Availability:

Feb-2015

Tested by: NEC Corporation

Software Availability:

Jul-2014

Peak Optimization Flags (Continued)

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll14
 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll12
 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll12
 -inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -inline-calloc -opt-malloc-options=3 -auto -unroll14

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>
<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-120f-RevB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>
<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-120f-RevB.xml>



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R120f-1M (Intel Xeon E5-2670 v3)

SPECfp2006 = 109

SPECfp_base2006 = 104

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Oct-2014

Hardware Availability: Feb-2015

Software Availability: Jul-2014

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Feb 5 18:35:02 2015 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 16 December 2014.