



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6028TP-HTR  
(X10DRT-P , Intel Xeon E5-2609 v3)

**SPECint\_rate2006 = 313**

**SPECint\_rate\_base2006 = 304**

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Nov-2014

Hardware Availability: Sep-2014

Software Availability: Sep-2014

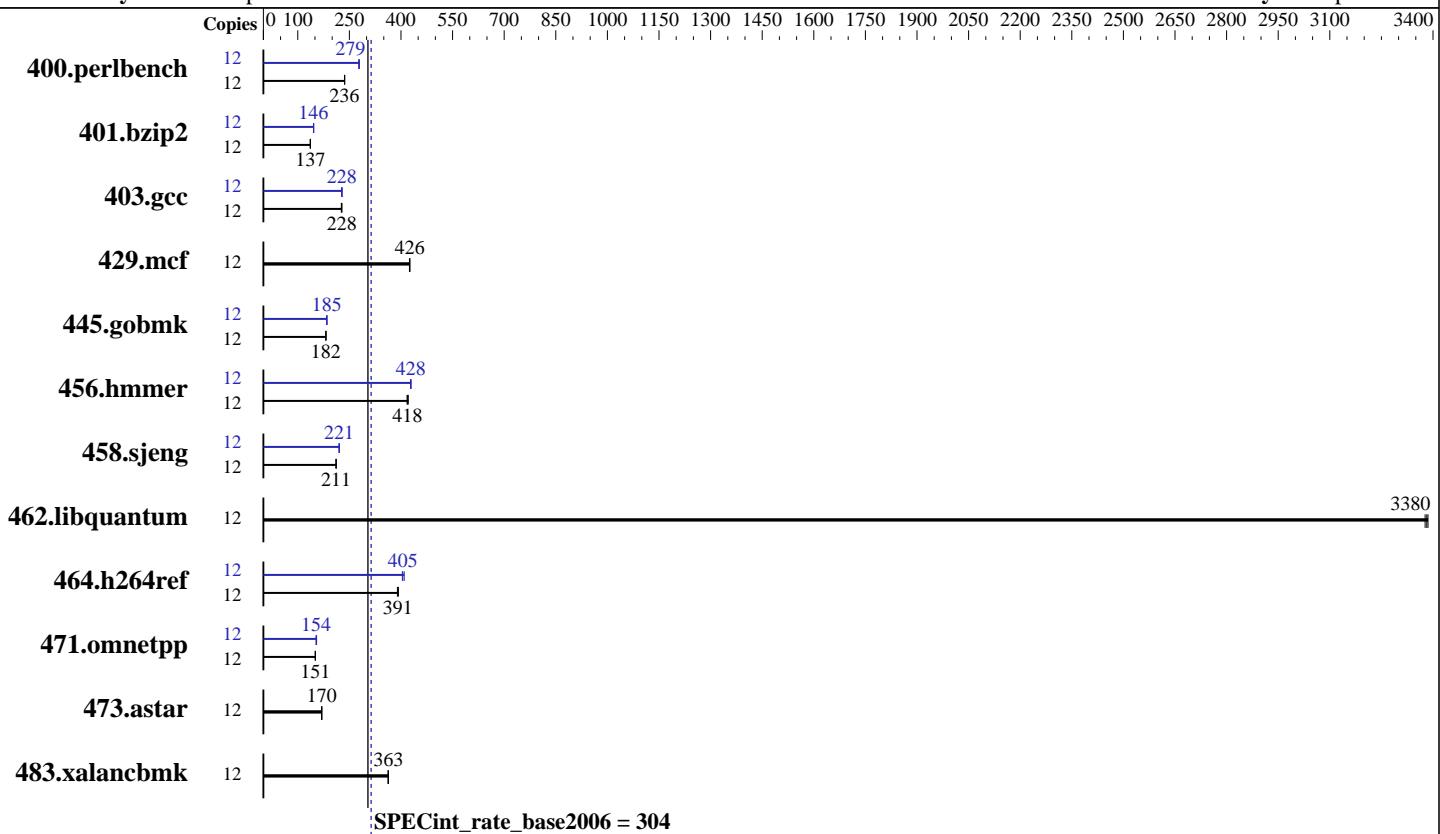

### Hardware

CPU Name:	Intel Xeon E5-2609 v3
CPU Characteristics:	
CPU MHz:	1900
FPU:	Integrated
CPU(s) enabled:	12 cores, 2 chips, 6 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	15 MB I+D on chip per chip
Other Cache:	None
Memory:	256 GB (16 x 16 GB 2Rx4 PC4-2133P-R, running at 1600 MHz)
Disk Subsystem:	1 x 1000 GB SATA III, 7200 RPM
Other Hardware:	None

### Software

Operating System:	Red Hat Enterprise Linux Server release 7.0, Kernel 3.10.0-123.el7.x86_64
Compiler:	C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux
Auto Parallel:	No
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Supermicro**

SuperServer 6028TP-HTR  
(X10DRT-P , Intel Xeon E5-2609 v3)

**SPECint\_rate2006 = 313**

**SPECint\_rate\_base2006 = 304**

**CPU2006 license:** 001176

**Test date:** Nov-2014

**Test sponsor:** Supermicro

**Hardware Availability:** Sep-2014

**Tested by:** Supermicro

**Software Availability:** Sep-2014

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	12	496	236	<b>496</b>	<b>236</b>	497	236	12	423	277	421	279	<b>421</b>	<b>279</b>
401.bzip2	12	<b>847</b>	<b>137</b>	846	137	851	136	12	<b>792</b>	146	794	146	<b>793</b>	<b>146</b>
403.gcc	12	423	228	426	227	<b>424</b>	<b>228</b>	12	425	227	422	229	<b>423</b>	<b>228</b>
429.mcf	12	257	426	<b>257</b>	<b>426</b>	258	425	12	257	426	<b>257</b>	<b>426</b>	258	425
445.gobmk	12	693	182	<b>692</b>	<b>182</b>	692	182	12	683	184	<b>682</b>	<b>185</b>	682	185
456.hammer	12	266	421	<b>268</b>	<b>418</b>	268	418	12	<b>261</b>	<b>428</b>	262	428	261	429
458.sjeng	12	686	212	<b>687</b>	<b>211</b>	688	211	12	658	221	<b>658</b>	<b>221</b>	660	220
462.libquantum	12	73.4	3390	<b>73.5</b>	<b>3380</b>	73.6	3380	12	73.4	3390	<b>73.5</b>	<b>3380</b>	73.6	3380
464.h264ref	12	677	392	682	390	<b>679</b>	<b>391</b>	12	649	409	657	404	<b>655</b>	<b>405</b>
471.omnetpp	12	<b>496</b>	<b>151</b>	498	151	496	151	12	<b>488</b>	<b>154</b>	485	155	489	153
473.astar	12	497	170	497	170	<b>497</b>	<b>170</b>	12	497	170	497	170	<b>497</b>	<b>170</b>
483.xalancbmk	12	228	363	228	362	<b>228</b>	<b>363</b>	12	228	363	228	362	<b>228</b>	<b>363</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Settings:

Early Snoop = Disable  
Enforce POR = Disabled

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/home/spec2k6/SPEC2006-V12/libs/32:/home/spec2k6/SPEC2006-V12/libs/64:/home/spec2k6/SPEC2006-V12/sh"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6028TP-HTR  
(X10DRT-P , Intel Xeon E5-2609 v3)

**SPECint\_rate2006 = 313**

**SPECint\_rate\_base2006 = 304**

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Nov-2014

Hardware Availability: Sep-2014

Software Availability: Sep-2014

## General Notes (Continued)

```
numactl --interleave=all runspec <etc>
```

## Base Compiler Invocation

C benchmarks:

```
icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32
```

C++ benchmarks:

```
icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32
```

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap
```

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32
```

400.perlbench: icc -m64

401.bzip2: icc -m64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6028TP-HTR  
(X10DRT-P , Intel Xeon E5-2609 v3)

**SPECint\_rate2006 = 313**

**SPECint\_rate\_base2006 = 304**

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Nov-2014

Hardware Availability: Sep-2014

Software Availability: Sep-2014

## Peak Compiler Invocation (Continued)

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

401.bzip2: -DSPEC\_CPU\_LP64

456.hmmer: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll14 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll12 -ansi-alias

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6028TP-HTR  
(X10DRT-P , Intel Xeon E5-2609 v3)

**SPECint\_rate2006 = 313**

**SPECint\_rate\_base2006 = 304**

**CPU2006 license:** 001176

**Test sponsor:** Supermicro

**Tested by:** Supermicro

**Test date:** Nov-2014

**Hardware Availability:** Sep-2014

**Software Availability:** Sep-2014

## Peak Optimization Flags (Continued)

C++ benchmarks:

```
471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
             -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
             -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
             -L/sh -lsmartheap
```

```
473.astar: basepeak = yes
```

```
483.xalancbmk: basepeak = yes
```

## Peak Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revE.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Dec 17 10:21:58 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 16 December 2014.