



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
(Test Sponsor: Intel Corporation)

SPECfp[®]2006 = **56.0**

ASUS H97M-PLUS Motherboard (Intel Pentium G3460)

SPECfp_base2006 = **55.2**

CPU2006 license: 13


Test date: Dec-2014

Test sponsor: Intel Corporation

Hardware Availability: Jul-2014

Tested by: Intel Corporation

Software Availability: Oct-2013

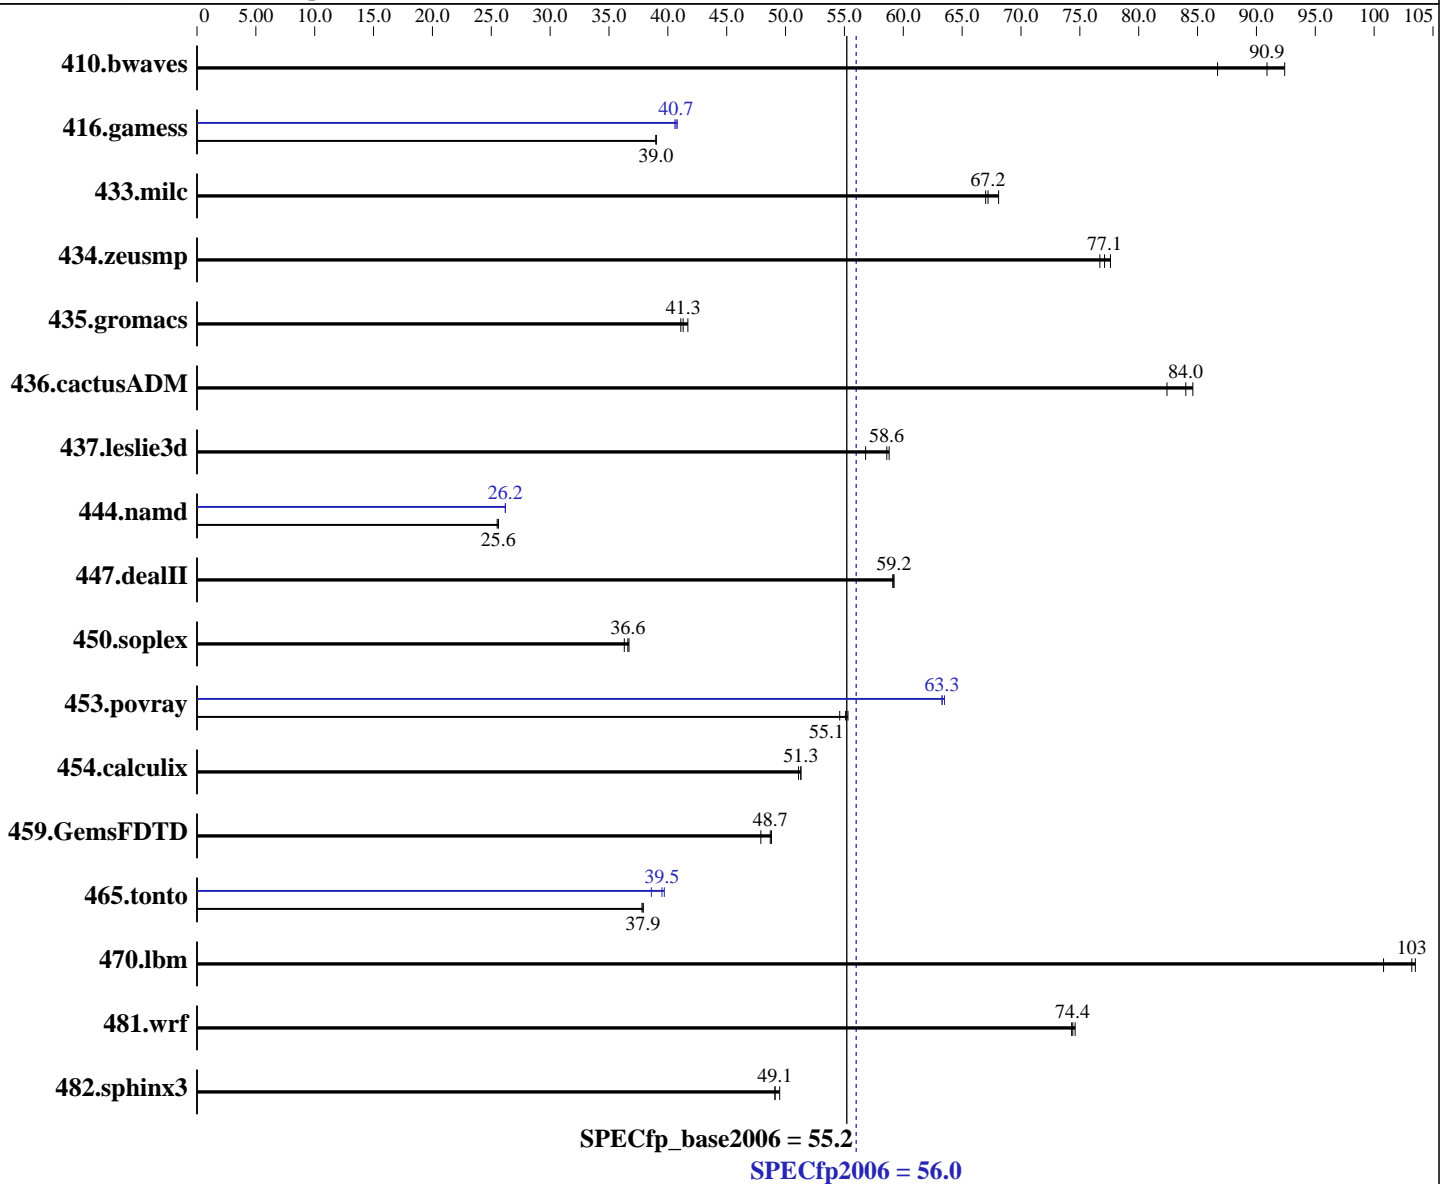

Hardware

CPU Name: Intel Pentium G3460
 CPU Characteristics:
 CPU MHz: 3500
 FPU: Integrated
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Microsoft Windows 8.1 Pro
 6.3.9600 N/A Build 9600
 Compiler: C/C++: Version 14.0.1.139 of Intel C++ Studio XE for Windows;
 Fortran: Version 14.0.1.139 of Intel Fortran Studio XE for Windows;
 Libraries: Version 16.00.30319.01 of Microsoft Visual Studio 2010 Professional SP1
 Auto Parallel: Yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
(Test Sponsor: Intel Corporation)

SPECfp2006 = **56.0**

ASUS H97M-PLUS Motherboard (Intel Pentium G3460)

SPECfp_base2006 = **55.2**

CPU2006 license: 13

Test date: Dec-2014

Test sponsor: Intel Corporation

Hardware Availability: Jul-2014

Tested by: Intel Corporation

Software Availability: Oct-2013

L3 Cache: 3 MB I+D on chip per chip
Other Cache: None
Memory: 8 GB (2 x 4 GB 2Rx4 PC3-12800U-11)
Disk Subsystem: 1 TB Seagate SATA, 7200RPM
Other Hardware: None

File System: NTFS
System State: Default
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: SmartHeap Library Version 10.0 from <http://www.microquill.com/>

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	157	86.7	147	92.4	150	90.9	157	86.7	147	92.4	150	90.9
416.gamess	502	39.0	502	39.0	503	39.0	481	40.7	482	40.6	480	40.8
433.milc	135	68.1	137	67.2	137	67.0	135	68.1	137	67.2	137	67.0
434.zeusmp	117	77.6	118	77.1	119	76.7	117	77.6	118	77.1	119	76.7
435.gromacs	174	41.1	173	41.3	171	41.7	174	41.1	173	41.3	171	41.7
436.cactusADM	141	84.6	142	84.0	145	82.4	141	84.6	142	84.0	145	82.4
437.leslie3d	166	56.8	160	58.8	161	58.6	166	56.8	160	58.8	161	58.6
444.namd	314	25.6	314	25.6	314	25.5	306	26.2	306	26.2	306	26.2
447.dealII	194	59.1	193	59.2	193	59.2	194	59.1	193	59.2	193	59.2
450.soplex	228	36.7	228	36.6	230	36.3	228	36.7	228	36.6	230	36.3
453.povray	96.6	55.1	96.2	55.3	97.5	54.6	83.8	63.5	84.0	63.3	84.0	63.3
454.calculix	161	51.3	161	51.3	162	51.1	161	51.3	161	51.3	162	51.1
459.GemsFDTD	222	47.9	218	48.7	218	48.8	222	47.9	218	48.7	218	48.8
465.tonto	260	37.9	260	37.9	261	37.8	249	39.5	255	38.6	248	39.7
470.lbm	136	101	133	103	133	104	136	101	133	103	133	104
481.wrf	150	74.6	150	74.3	150	74.4	150	74.6	150	74.3	150	74.4
482.sphinx3	397	49.1	394	49.5	397	49.1	397	49.1	394	49.5	397	49.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

To compile these binaries, the Intel Compiler 14.0 was set up to generate 64-bit binaries with the command:
"ipsxe-comp-vars.bat intel64 vs2010" (shortcut provided in the Intel(r) Parallel Studio XE 2013 program folder)

Platform Notes

Sysinfo program C:\SPEC14.0\Docs\sysinfo
\$Rev: 6775 \$ \$Date:: 2011-08-16 #\$ \8787f7622badcf24e01c368b1db4377c
running on Clt10C37B4DEB68 Tue Dec 2 19:15:04 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
(Test Sponsor: Intel Corporation)

SPECfp2006 = 56.0

ASUS H97M-PLUS Motherboard (Intel Pentium G3460)

SPECfp_base2006 = 55.2

CPU2006 license: 13

Test date: Dec-2014

Test sponsor: Intel Corporation

Hardware Availability: Jul-2014

Tested by: Intel Corporation

Software Availability: Oct-2013

Platform Notes (Continued)

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

Trying 'systeminfo'

```
OS Name       : Microsoft Windows 8.1 Pro
OS Version    : 6.3.9600 N/A Build 9600
System Manufacturer: ASUS
System Model  : All Series
Processor(s)  : 1 Processor(s) Installed.
               [01]: Intel64 Family 6 Model 60 Stepping 3 GenuineIntel ~3500 Mhz
BIOS Version  : American Megatrends Inc. 0317, 4/23/2014
Total Physical Memory: 6,021 MB
```

Trying 'wmic cpu get /value'

```
DeviceID      : CPU0
L2CacheSize   : 512
L3CacheSize   : 3072
MaxClockSpeed : 3500
Name          : Intel(R) Pentium(R) CPU G3460 @ 3.50GHz
NumberOfCores : 2
NumberOfLogicalProcessors: 2
```

(End of data from sysinfo program)

Component Notes

Tested systems can be used with Shin-G ATX case,
PC Power and Cooling 1200W power supply

General Notes

OMP_NUM_THREADS set to number of processors cores
KMP_AFFINITY set to granularity=fine,scatter
Binaries compiled on a system with 1x Intel Core i7-860 CPU
+ 8GB memory using Windows 7 Enterprise 64-bit

Base Compiler Invocation

C benchmarks:

```
icl -Qvc10 -Qstd=c99
```

C++ benchmarks:

```
icl -Qvc10
```

Fortran benchmarks:

```
ifort
```

Benchmarks using both Fortran and C:

```
icl -Qvc10 -Qstd=c99 ifort
```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
(Test Sponsor: Intel Corporation)

SPECfp2006 = 56.0

ASUS H97M-PLUS Motherboard (Intel Pentium G3460)

SPECfp_base2006 = 55.2

CPU2006 license: 13

Test date: Dec-2014

Test sponsor: Intel Corporation

Hardware Availability: Jul-2014

Tested by: Intel Corporation

Software Availability: Oct-2013

Base Portability Flags

```

410.bwaves: -DSPEC_CPU_P64
416.gamess: -DSPEC_CPU_P64
433.milc: -DSPEC_CPU_P64
434.zeusmp: -DSPEC_CPU_P64
435.gromacs: -DSPEC_CPU_P64
436.cactusADM: -DSPEC_CPU_P64 -names:lowercase /assume:underscore
437.leslie3d: -DSPEC_CPU_P64
444.namd: -DSPEC_CPU_P64 /TP
447.dealII: -DSPEC_CPU_P64 -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
-Qoption,cpp,--ms_incompat_treatment_of_commas_in_macros
450.soplex: -DSPEC_CPU_P64
453.povray: -DSPEC_CPU_P64 -DSPEC_CPU_NEED_INVHYP -DNEED_INVHYP
454.calculix: -DSPEC_CPU_P64 -DSPEC_CPU_NOZMODIFIER -names:lowercase
459.GemsFDTD: -DSPEC_CPU_P64
465.tonto: -DSPEC_CPU_P64
470.lbm: -DSPEC_CPU_P64
481.wrf: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
482.sphinx3: -DSPEC_CPU_P64

```

Base Optimization Flags

C benchmarks:

```

-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qparallel -Qansi-alias
-Qopt-prefetch -Qauto-ilp32 /F1000000000

```

C++ benchmarks:

```

-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qparallel -Qansi-alias
-Qopt-prefetch -Qcxx-features -Qauto-ilp32 /F1000000000 shlw64M.lib
-link /FORCE:MULTIPLE

```

Fortran benchmarks:

```

-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qparallel -Qansi-alias
-Qopt-prefetch /F1000000000

```

Benchmarks using both Fortran and C:

```

-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qparallel -Qansi-alias
-Qopt-prefetch -Qauto-ilp32 /F1000000000

```

Peak Compiler Invocation

C benchmarks:

```

icl -Qvc10 -Qstd=c99

```

C++ benchmarks:

```

icl -Qvc10

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
(Test Sponsor: Intel Corporation)

SPECfp2006 = 56.0

ASUS H97M-PLUS Motherboard (Intel Pentium G3460)

SPECfp_base2006 = 55.2

CPU2006 license: 13

Test date: Dec-2014

Test sponsor: Intel Corporation

Hardware Availability: Jul-2014

Tested by: Intel Corporation

Software Availability: Oct-2013

Peak Compiler Invocation (Continued)

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icl -Qvc10 -Qstd=c99 ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Oa -Qauto-ilp32 /F1000000000
sh1w64M.lib -link /FORCE:MULTIPLE

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll4 -Qansi-alias -Qauto-ilp32
/F1000000000 sh1w64M.lib -link /FORCE:MULTIPLE

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll2 -Ob0 -Qansi-alias
-Qscalar-rep- /F1000000000

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
(Test Sponsor: Intel Corporation)

SPECfp2006 = 56.0

ASUS H97M-PLUS Motherboard (Intel Pentium G3460)

SPECfp_base2006 = 55.2

CPU2006 license: 13

Test date: Dec-2014

Test sponsor: Intel Corporation

Hardware Availability: Jul-2014

Tested by: Intel Corporation

Software Availability: Oct-2013

Peak Optimization Flags (Continued)

459.GemsFDTD: basepeak = yes

465.tonto: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll4 -Qauto -Qinline-calloc
/F1000000000

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-windows.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-windows.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Dec 30 16:12:28 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 30 December 2014.