SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant BL460c Gen9
(1.90 GHz, Intel Xeon E5-2609 v3)

SPECint®_rate2006 = 321

SPECint_rate_base2006 = 311

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Dec-2014
Hardware Availability: Sep-2014
Software Availability: Sep-2014

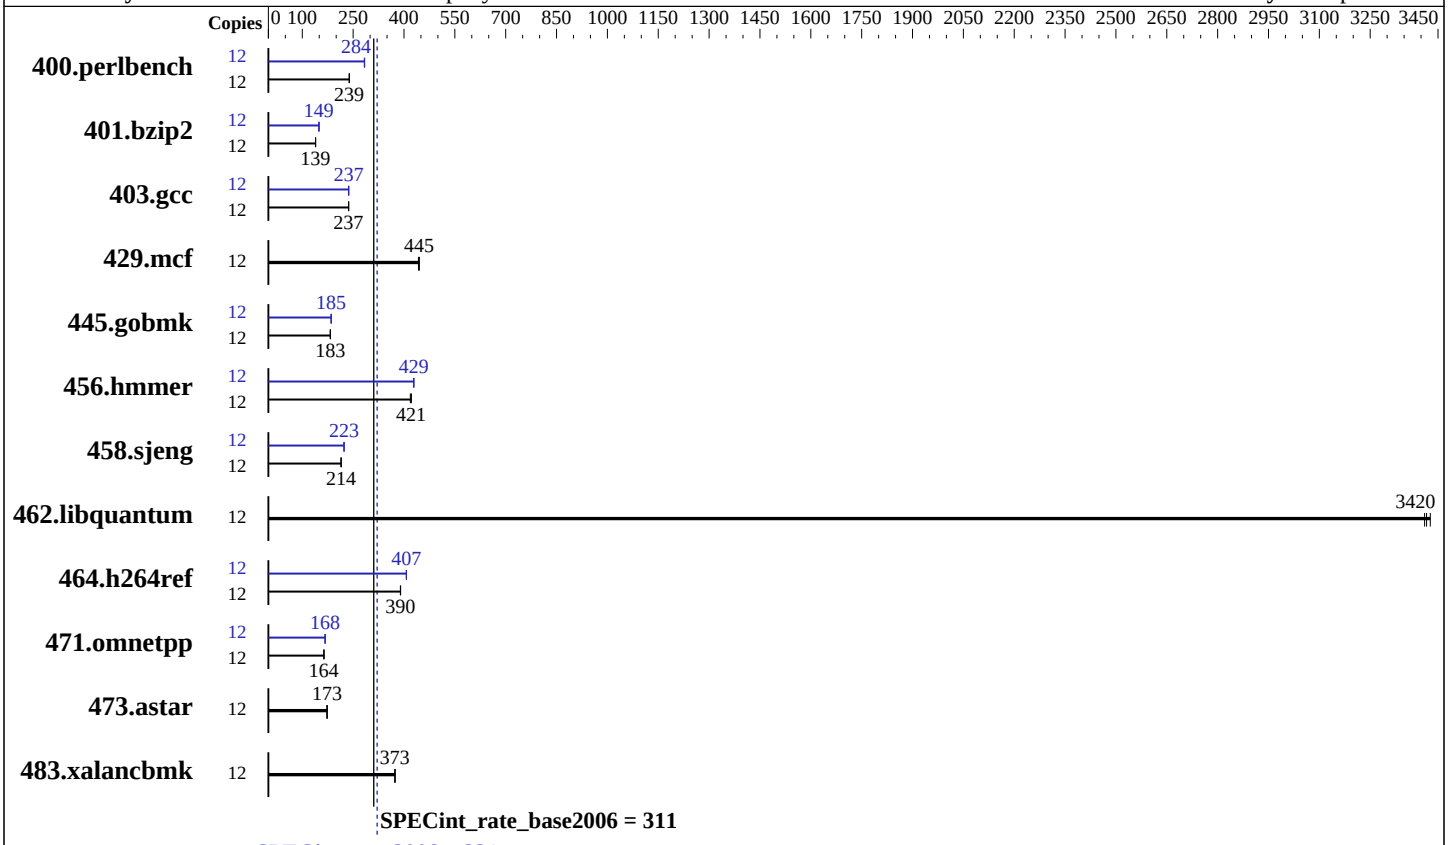

Hardware

CPU Name:	Intel Xeon E5-2609 v3
CPU Characteristics:	
CPU MHz:	1900
FPU:	Integrated
CPU(s) enabled:	12 cores, 2 chips, 6 cores/chip
CPU(s) orderable:	1,2 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	15 MB I+D on chip per chip
Other Cache:	None
Memory:	128 GB (8 x 16 GB 2Rx4 PC4-2133P-R, running at 1600 MHz)
Disk Subsystem:	2 x 400 GB SSD SAS, RAID 1
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 7.0 (Maipo) Kernel 3.10.0-123.el7.x86_64
Compiler:	C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux
Auto Parallel:	No
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.0

SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant BL460c Gen9
(1.90 GHz, Intel Xeon E5-2609 v3)

SPECint_rate2006 = 321

SPECint_rate_base2006 = 311

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Dec-2014
Hardware Availability: Sep-2014
Software Availability: Sep-2014

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	12	**491**	**239**	491	239	491	239	12	414	283	413	284	**413**	**284**
401.bzip2	12	**833**	**139**	834	139	829	140	12	**776**	**149**	775	149	778	149
403.gcc	12	**408**	**237**	408	237	408	237	12	408	237	**408**	**237**	407	237
429.mcf	12	247	443	246	445	**246**	**445**	12	247	443	246	445	**246**	**445**
445.gobmk	12	690	183	**688**	**183**	688	183	12	680	185	**680**	**185**	679	185
456.hmmer	12	267	419	**266**	**421**	266	422	12	261	430	262	428	**261**	**429**
458.sjeng	12	**677**	**214**	677	214	677	215	12	**650**	**223**	651	223	650	223
462.libquantum	12	72.9	3410	**72.8**	**3420**	72.5	3430	12	72.9	3410	**72.8**	**3420**	72.5	3430
464.h264ref	12	682	389	**681**	**390**	681	390	12	**652**	**407**	652	407	653	407
471.omnetpp	12	**457**	**164**	457	164	458	164	12	449	167	**448**	**168**	447	168
473.astar	12	487	173	485	174	**487**	**173**	12	487	173	485	174	**487**	**173**
483.xalancbmk	12	221	374	**222**	**373**	222	373	12	221	374	**222**	**373**	222	373

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/transparent_hugepage/enabled
Filesystem page cache cleared with:
 echo 1>       /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
```

Platform Notes

```
BIOS Configuration:
 HP Power Profile set to Custom
 HP Power Regulator to HP Static High Performance Mode
 Minimum Processor Idle Power Core State set to C6 State
 Minimum Processor Idle Power Package State set to No Package State
 QPI Snoop Configuration set to Early Snoop
 Thermal Configuration set to Maximum Cooling
 Collaborative Power Control set to Disabled
 Processor Power and Utilization Monitoring set to Disabled
 Memory Double Refresh Rate set to 1x Refresh
```

Continued on next page

Platform Notes (Continued)

```
Sysinfo program /cpu2006/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
running on X-bl460c_gen9-VP2.1 Wed Dec 10 18:17:13 2014

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E5-2609 v3 @ 1.90GHz
      2 "physical id"s (chips)
      12 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 6
      siblings  : 6
      physical 0: cores 0 1 2 3 4 5
      physical 1: cores 0 1 2 3 4 5
   cache size : 15360 KB

From /proc/meminfo
   MemTotal:       131734372 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

From /etc/*release* /etc/*version*
   os-release:
      NAME="Red Hat Enterprise Linux Server"
      VERSION="7.0 (Maipo)"
      ID="rhel"
      ID_LIKE="fedora"
      VERSION_ID="7.0"
      PRETTY_NAME="Red Hat Enterprise Linux Server 7.0 (Maipo)"
      ANSI_COLOR="0;31"
      CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
   redhat-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
   system-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
   system-release-cpe: cpe:/o:redhat:enterprise_linux:7.0:ga:server

uname -a:
   Linux X-bl460c_gen9-VP2.1 3.10.0-123.el7.x86_64 #1 SMP Mon May 5 11:16:57 EDT
   2014 x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Dec 10 18:14

SPEC is set to: /cpu2006
   Filesystem     Type  Size  Used Avail Use% Mounted on
   /dev/sda4      xfs   277G   96G  182G  35% /
Additional information from dmidecode:

   Warning: Use caution when you interpret this section. The 'dmidecode' program
```

Continued on next page

Platform Notes (Continued)

```
      reads system data which is "intended to allow hardware to be accurately
      determined", but the intent may not be met, as there are frequent changes to
      hardware, firmware, and the "DMTF SMBIOS" standard.

    BIOS HP I36 08/26/2014
    Memory:
     8x HP 752369-081 16 GB 2 rank 2133 MHz, configured at 1600 MHz
     8x UNKNOWN NOT AVAILABLE

  (End of data from sysinfo program)
Regarding the sysinfo display about the memory installed, the correct amount of
memory is 128 GB and the dmidecode description should have one line reading as:
 8x HP 752369-081 16 GB 2 rank 2133 MHz, configured at 1600 MHz
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/cpu2006/libs/32:/cpu2006/libs/64:/cpu2006/sh"

 Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB
 memory using RedHat EL 7.0
```

Base Compiler Invocation

C benchmarks:

```
icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32
```

C++ benchmarks:

```
icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32
```

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32`

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:
`icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`
401.bzip2: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
458.sjeng: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-xCORE-AVX2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-auto-ilp32`

401.bzip2: `-xCORE-AVX2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-opt-prefetch -auto-ilp32 -ansi-alias`

403.gcc: `-xCORE-AVX2 -ipo -O3 -no-prec-div`

Continued on next page

Peak Optimization Flags (Continued)

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html
http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml
http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Mon Jan 12 11:06:38 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 9 January 2015.